



CATALOGUE 2025

COSTER

Table of contents

BUILDING AUTOMATION

	Programmable controllers	11
	Configurable controller GPC 642	23
	Preconfigured controllers	27
	Central heating	28
	Multi-purpose controllers and instruments	38
	Air conditioning and air treatment	47
	Room control	55

MONITORING

	Energy Monitoring	67
---	-------------------------	----

PRODUCTS

	Domestic hot water mixing	91
	Gas safety	97
	Valves and actuators	111
	Sensors and accessories	150

BUILDING MANAGEMENT SYSTEM

	Supervision connectivity and accessories	165
	Webgarage Licences	166
	Software	168
	Modem / Routers	169
	Various accessories	174

Alphanumeric table of contents

2...3	
code	page
2F DN 50	123
2F DN 65	123
2F DN 80	123
2F DN 100	123
2F DN 125	123
2F DN 150	123
2F DN 200	123
2FT40	123
2FT50	123
2FT65	123
2FT80	123
2FT100	123
2FT125	123
2FT150	123
2FT200	123
2S DN 40	121
2S DN 50	121
2S DN 65	121
2S DN 80	121
2S DN 100	121
2S DN 100S	121
2S DN 125	121
2S DN 150	121
2S DN 200	121
3 IMP	74-77
A	
code	page
ACB 232	175
ACB 232 / S1	175
ACB 332	171
ACB 400	174
ACB 460	174
ACB 468	174
ACC 019	100
ACC 060	100
ACC 150	100
ACC 240	100
ACC 400	100
ACD 655	28-39
ACE 008/P	127
ACM 103	152,156
ACS 232	175
ACX 232	172, 174

AGT 10	116
AGT 12	116
AGT 14	116
AGT 15	116
AGT 16	116
AH-20	147
AH-25	147
AH-GMA	147
AH-TF	147
ALD 018	58
ALD 110	60
ALI 310	101
ALM 1210	21
ALM 1225	21
ALM M12	127
ALP 114	101
ALP 120	101
ANT 500D	169, 170
ANT 868	20, 70
APA 500	20, 149, 169
APV 100	153
ARE 338	169
ARS 604B	136
ASA 010	38
ASA 420	28, 29, 38
ATC 220	112
ATC 24	112
ATC 220S	112
ATC 24S	112
ATC M24	112
ATR 868	115
AUX M12	127
AVA 101	124 - 125
AVC 20-100	127
AVF 171	126
AVF 172	126
AVX 10-32	127
AVX 40-50	127
AVY 15-32	127
AVY 40-50	127
AVS 103	124, 125
AVS 104	124, 125

B	
code	page
BDL 001	64
BDL 002	64
BDL 004	64
BME ...	87-88
BRG 868	20
BRG 868C	20
BRK 001	73
BRK 003	73
C	
code	page
CAP 328	42
CDB 100	161
CDB 200	161
CDB 300	161
CDB 300/S1	161
CDB 301	161
CDB 333	161
CDK 032	114
CDK 034	114
CDK 038	114
CDK 062	114
CDK 064	114
CDK 068	114
CFL 104	146
CFL 124	146
CFL 124/C	146
CFL 128	146
CFL 128/C	146
CFL 134	146
CFS 404	146
CFS 404/C	146
CFS 424	146
CFS 424/C	146
CFS 428	146
CFS 428/C	146
CFT 004	146
CFT 024	146
CFT 024/C	146
CFT 028	146
CFT 028/C	146
CLAV 214	137
CLAV 218	137
CLAV 254-0	137

CLNF U254	138
CLNF U254-0	138
CLNF U254R-0	138
CLNF U258R	138
CLNV 214	137
CLNV 218	137
CLNV 254-0	137
CLNV 314	137
CLNV 314-R	137
CLNV 318	137
CLNV 318-R	137
CLNV 354-0	137
CLNV 354R-0	137
CMC 328	72
CMC 422	72
CMC 428	72
COP 868	150
COSTERTOOLS	168
CRB 094	124
CRB 098	124
CRB 098/S2	124
CSA 344	40
CSC 328	41
CSG 804	145
CSG 834	145
CSG 834/C	145
CSG 838	145
CSG 838/C	145
CSL 104	145
CSL 134	145
CSL 134/C	145
CSL 138	145
CSL 138/C	145
CSL 882	101
CSN 204	145
CSN 234	145
CSN 234/C	145
CSN 238	145
CSN 238/C	145
CSS 404	145
CSS 434	145
CSS 434/C	145
CSS 438	145
CSS 438/C	145
CSV 328	41
CSW 868	71. 151
CVC 014	124
CVC 014/T	124
CVC 018	124

CVC 018/T	124
CVC 034	124
CVC 034/T	124
CVC 038	124
CVC 038/T	124
CVC 094	124
CVC 094/T	124
CVC 098	124
CVC 098/T	124
CVC 184	124
CVC 184/T	124
CVC 188	124
CVC 188/T	124
CVF 154	126
CVF 158	126
CVF 454	126
CVF 458	126
CVH 054	125
CVH 054/T	125
CVH 058	125
CVH 058/T	125
CVH 114	125
CVH 114/T	125
CVH 118	125
CVH 118/T	125
CVH 214	125
CVH 214/T	125
CVH 218	125
CVH 218/T	125
CVH 634	125
CVH 634/T	125
CVH 638	125
CVH 638/T	125
CVLR 095	133
CVLR 095-0	133
CVLR 095-MOD	133
CVLR 097	133
CVQ 095	141
CVQ 095-0	141
CVQ 097	141
CVS 808	125
CWC 100	166
CWC 01K	166
CWS 100	166
CWS 200	166
CWS 500	166
CWS 01K	166
CWS 02K	166
CWS 05K	166

CWS 10K	166
CWS 50K	166
CWS 1HK	166
CWS 01K_MAINT	167
CWS 02K_MAINT	167
CWS 05K_MAINT	167
CWS 10K_MAINT	167
CWS 1HK_MAINT	167
CWS 100_MAINT	167
CWS 200_MAINT	167
CWS 500_MAINT	167
CWS 50K_MAINT	167

D

code	page
DAM 675	38
DCF 648	29
DDM 328	43
DEP 648	61
DEP 658	60
DEP 678	61
DGD 118	99
DGD 148.15	99
DGD 148.20	99
DGD 148.25	99
DGD 218	99
DGD 248.15	99
DGD 248.20	99
DGD 248.25	99
DGD 318	99
DGT 110	116
DGT 110/R	116
DGT 115	116
DGT 115/R	116
DGT 120	116
DGT 210	116
DGT 210/R	116
DGT 215	116
DGT 215/R	116
DGT 220	116
DPS 638	46
DRP 414	40
DRU 414	46
DRU 418	46
DRU 614	45
DRU 618	45
DSP 120	14
DTC 648	28
DTF 314	43
DTF 318	43

Alphabetic Index

E	
code	page
EHC 602	12, 68, 167
EQL 060	84
EQL 250	84
EQX 424	84
ESP 442	19
ESU 402	19
EST 482	19, 70
ETH 338	169

F	
code	page
FCF 223	147
FCM 15-20-25	107
FCM 32-40	107
FCM 50	107
FCM 65-80	107
FCM 100	107
FCM 125-150	107
FCR ...	104
FCS 123	147
FCS 2A	137, 138
FCS 223	147

G	
code	page
GAR 232	105
GAR 432	105
GAR 832	105
GAR 240	105
GAR 440	105
GAR 840	105
GAR 250	105
GAR 450	105
GAR 850	105
GAR 265	106
GAR 465	106
GAR 865	106
GAR 280	106
GAR 480	106
GAR 880	106
GAR 2100	106
GAR 4100	106
GAR 8100	106
GAR 2125	106
GAR 4125	106
GAR 8125	106
GAR 2150	106
GAR 4150	106

GAR 8150	106
GAR 2200	106
GAR 4200	106
GAR 8200	106
GAR 2300	106
GAR 4300	106
GAR 8300	106
GARO 215	102
GARO 220	102
GARO 225	102
GARO 415	102
GARO 420	102
GARO 425	102
GARO 815	102
GARO 820	102
GARO 825	102
GCA 215	107
GCA 220	107
GCA 225	107
GCA 415	107
GCA 420	107
GCA 425	107
GCA 432	107
GCA 440	107
GCA 450	107
GCA 465	107
GCA 480	107
GCA 815	107
GCA 820	107
GCA 825	107
GCA 832	107
GCA 840	107
GCA 850	107
GCA 865	107
GCA 880	107
GCA 4100	107
GCA 4125	107
GCA 4150	107
GCA 4200C	107
GCA 4250C	107
GCA 4300C	107
GCA 8100	107
GCA 8125	107
GCA 8150	107
GCA 8200C	107
GCA 8250C	107
GCA 8300C	107
GCAO 210	101
GCAO 215	101
GCAO 220	101
GCAO 410	101

GCAO 415	101
GCAO 420	101
GCAO 810	101
GCAO 815	101
GCAO 820	101
GCR 815	103
GCR 415	103
GCR 215	103
GCR 820	103
GCR 420	103
GCR 220	103
GCR 825	103
GCR 425	103
GCR 225	103
GCR 832	103
GCR 432	103
GCR 232	103
GCR 840	103
GCR 440	103
GCR 240	103
GCR 850	103
GCR 450	103
GCR 250	103
GCR 865	104
GCR 465	104
GCR 265	104
GCR 880	104
GCR 480	104
GCR 280	104
GCR 8100	104
GCR 4100	104
GCR 2100	104
GCR 8125	104
GCR 4125	104
GCR 2125	104
GCR 8150	104
GCR 4150	104
GCR 2150	104
GCR 8200	104
GCR 4200	104
GCR 2200	104
GCR 8300	104
GCR 4300	104
GCR 2300	104
GCRO 215	102
GCRO 220	102
GCRO 225	102
GCRO 415	102
GCRO 420	102

GCRO 425	102
GCRO 815	102
GCRO 820	102
GCRO 825	102
GIS 062	78, 79
GIS 090	152
GIS 090/INOX	152
GIS 112	78,79
GIS 160	152, 156
GIS 160/INOX	152, 156
GIS 500	152, 156
GIS 500/INOX	152, 156
GPC 642	24
GSP 485	71
GTW 208	84
GTW 232485	171
GVC 348	172
H	
code	page
HGM 210	113
HGM 215	113
HGM 220	113
HGM 225	113
HMM 210	113
HMM 215	113
HMM 220	113
HMM 225	113
HMM 320	113
HMM 325	113
HMM 410	113
HMM 415	113
HMM 420	113
I	
code	page
IEF 276-10	78
IEF 276-100	78
IEF 276-1000	78
IEM 277-10	79
IEM 277-100	79
IEM 277-1000	79
IEW 278-10	79
IEW 278-100	79
IEW 278-1000	79
IPG 318	39
IPS 328	40
ISC 648	28, 29

J	
code	page
JOY 879W	62
JOY 771W	62
JOY 363W	62
K	
code	page
KBHF 50-15	82
KBHF 65-25	82
KBHF 80-40	82
KBHF 100-60	82
KBHF 125-100	82
KBHF 150-150	82
KBHF 200-250	82
KBHF 250-400	82
KBHF 300-600	82
KG 10	147
KH 8	147
KH-AFB	147
KH-LF	147
KIT 668	170
KMF 15D	80
KMF 20D	80
KMF 25C	80
KMF 32C	80
KMF 40C	80
KMF 50C	80
KMHF 25-3,5	82
KMHF 25-6	82
KMHF 40-10	82
KMHF 50-15	82
KMHF 65-25	82
KMHF 80-40	82
KMHF 100-60	82
KMHG 25-3,5	82
KMHG 25-6	82
KMHG 40-10	82
KUC 15 D	77
KUC 15W-N	78
KUC 20 D	77
KUC 20W-N	78
KUF 15 D	77
KUF 15W-N	78
KUF 20 D	77
KUF 25 C	77
KUF 20W-N	78
KWM 50/C1	81
KWM 65/C1	81

KWM 80/C1	81
KWM 100/C1	81
KWM 125/C1	81
KWM 150/C1	81
KWP 50C	81
KWP 65C	81
KWP 80C	81
KWP 100C	81
KWP 125C	81
KWP 150M	81
KWP 200M	81
L	
code	page
LCF 363W	62
LCF 364W	62
LCF 771W	62
LCR 348	41
LGP 250	159, 174
LGP 500	159, 174
M	
code	page
MAS 615	94
MAS 620	94
MAS 625	94
MAS 632	94
MAS 615/AL	95
MAS 620/AL	95
MAS 625/AL	95
MAS 632/AL	95
MAS 615/T	92
MAS 620/T	92
MAS 625/T	92
MAS 632/T	92
MAS 615/T/AL	93
MAS 620/T/AL	93
MAS 625/T/AL	93
MAS 632/T/AL	93
MAS 740	94
MAS 740/AL	95
MAS 740/T	92
MAS 740/T/AL	93
MAS 750	94
MAS 750/AL	95
MAS 750/T	92
MAS 750/T/AL	93
MDM 002	170
MDM 232	170
MFD 418	73

Alphabetic Index

MFD 428	73
MFD 448	73
MFD 548	73
MHF 15-1,5	74
MHF 20-2,5	74
MHN 15-1,5	74
MHN 20-2,5	74
MHR 15-1,5	75
MRL 608	58
MWM 000	72

O

code	page
OCR 348	40

P

code	page
PBD 400	66
PCB 332	171
PCB 432	172
PCP 868	71
PCS 104	147
PDA 004	64
PDD 001	65
PDD 002	65
PDD 003	65
PDD 004	65
PDD 005	66
PDS 001	66
PDF 795	160
PLE 608	38
PME ...	87,88
PPC 102	167
PRU 002	56

Q

code	page
Q380	22
Q381	22
Q382	22
Q383	22
Q384	22
Q880	22
Q881	22

Q882	22
Q883	22
Q884	22
QGP0	24
QGP1	24
QGP2	24
QGP3	24
QGP0-1	24
QGP1-1	24
QGP2-1	24
QGP3-1	24

R

code	page
RFG 442	98
RFG 448	98
RPT 001	84
RQA 410	53
RTF 314	44
RTF 318	44
RTL 110	58
RTL 111	59
RTL 120	59
RTL 141	60
RTL 510	58
RTL 511	59
RTL 520	59
RTL 541	61
RTP 318	42
RUT 002	171
RUT 302	169

S

code	page
SAA 001	154
SAA 010	154
SAB 002	152
SAB 002/SF	154
SAB 010	154
SAB 010/SF	154
SAB 020	154
SAC 002	153
SAE 001	153
SAE 002	153
SAE 420	153
SAF 001	152

SAF 001W	152
SAF 002	152
SAF 010	152
SAF 110	157
SAI 010	154
SAL 500	159
SAL 881	101
SAS 880	101
SAU 734	157
SAU 914	157
SCH 001W	153
SCH 002	153
SCH 010	153
SDA 700	158, 174
SDC 020	16
SDW 201	156
SDW 202	156
SDW 206	156
SGE 001	154
SGG 001	154
SHF 001	156
SIH 001W	153
SIH 002	153
SIH 010	153
SIH 010/Inox	153
SIR 010	155
SMP 750	124
SMP 760	124
SPT 006	76 - 79
SPT 106	76 - 79
SPW 204	158
SPW 210	158
SPW 216	158
SQC 954	53, 159
SQS 954	53, 159
SRD 150	98
SRD 250	98
SRS 150	98
SRS 250	98
SRS 350	98
STA 001	152
STA 001W	152
STA 002	152

STA 010	152
STF 001	155
STH 001	155
STT 010	155
STT 868 H	150
STU 868 H	150
SUP 120	14
SUR 704	156
SUT 734	157
SVK 014	126
SVK 014/C	114
SWB 912	151
SWC 701	168
SWH 005	171
T	
code	page
TAG 797	160
THP 868	150
TMS 500	94, 95
TMS 600	94, 95
TMS 700	94, 95
TMT 500	92, 93
TMT 600	92, 93
TMT 700	92, 93
TVG G16	134
TVG G20	134
TVG G25	134
TVG G32	134
TVG G40	134
TVG G50	134
U	
code	page
UAC 324	173
UAC 328	173
UAL 358	159
UCI 328	83
UCO 318	172
UCO 638	172
UHF 15-1,5	76
UHF 20-2,5	76
UHF 20-3,5	76
UHF 25-3,5	76
UHF 25-6	76
UHF 40-10	76

UHM 15-1,5	76
UHM 20-2,5	76
UHM 20-3,5	76
UHM 25-3,5	76
UHM 25-6	76
UHM 40-10	76
UHN 15-1,5	75
UHN 20-2,5	75
UHN 20-3,5	75
UHN 25-3,5	75
UHN 25-6	75
UHN 40-10	75
UHR 15-1,5	77
UHR 20-2,5	77
UHR 20-3,5	77
UHR 25-3,5	77
UHR 25-6	77
UHR 40-10	77
ULT 328	173
ULT 348	173
ULT 348/S1	173
UML 318	159, 174
UPA 798	160
UPC 799	160
UPM 678	60
USB 011	14
USB 485	16, 20
USB M12	127
V	
code	page
VBR 215-0,25	129
VBR 215-0,4	129
VBR 215-0,63	129
VBR 215-1	129
VBR 215-1,6	129
VBR 215-2,5	129
VBR 215-4	129
VBR 215-6,3	129
VBR 220-4	129
VBR 220-6,3	129
VBR 220-8,6	129
VBR 220-10	129
VBR 225-6,3	129
VBR 225-10	129
VBR 225-16	129
VBR 232-10	129
VBR 232-16	129
VBR 232-25	129

VBR 240-16	129
VBR 240-25	129
VBR 250-25	129
VBR 250-40	129
VBR 315-0,25	130
VBR 315-0,4	130
VBR 315-0,63	130
VBR 315-1	130
VBR 315-1,6	130
VBR 315-2,5	130
VBR 315-4	130
VBR 315-6,3	130
VBR 320-4	130
VBR 320-6,3	130
VBR 320-10	130
VBR 325-6,3	130
VBR 325-10	130
VBR 325-16	130
VBR 332-10	130
VBR 332-16	130
VBR 332-25	130
VBR 340-16	130
VBR 340-25	130
VBR 350-25	130
VBR 350-40	130
VFC 212	112
VFC 213	112
VFC 214	112
VFC 235	112
VFC 237	112
VFC 238	112
VFC 312	112
VFC 314	112
VFC 335	112
VFC 338	112
VFC 412	112
VFC 413	112
VFC 414	112
VFC 435	112
VFC 437	112
VFC 438	112
VFF 3100	122
VFF 3125	122
VFF 3150	122
VFF 340	122
VFF 350	122
VFF 365	122
VFF 380	122
VFF 4100	122
VFF 4125	122

Alphabetic Index

VFF 4150	122
VFF 440	122
VFF 450	122
VFF 465	122
VFF 480	122
VFG 320	122
VFG 325	122
VFG 332	122
VFG 340	122
VFG 350	122
VFG 420	122
VFG 425	122
VFG 432	122
VFG 440	122
VFG 450	122
VGT 110	116
VGT 115	116
VGT 120	116
VGT 110/R	116
VGT 115/R	116
VGT 210	116
VGT 215	116
VGT 220	116
VGT 210/R	116
VGT 215/R	116
VOBG 311	134
VOBG 312	134
VOBG 313	134
VOBG 314	134
VOBG 315	134
VOBG 320	134
VOBG 325	134
VOBG 332	134
VOBG 340	134
VOBG 350	134
VONF 3100	136
VONF 3125	136
VONF 3150	136
VONF 315	136
VONF 320	136
VONF 325	136
VONF 332	136
VONF 340	136
VONF 350	136
VONF 364	136
VONF 365	136
VONF 379	136

VONF 380	136
VORF 3100	135
VORF 315	135
VORF 320	135
VORF 325	135
VORF 332	135
VORF 340	135
VORF 350	135
VORF 364	135
VORF 379	135
VSF 3100	121
VSF 3125	121
VSF 3150	121
VSF 340	121
VSF 350	121
VSF 365	121
VSF 380	121
VSG 320	121
VSG 325	121
VSG 332	121
VSG 340	121
VSG 350	121
VYG 615-0,25-0,25	131
VYG 615-0,25-0,4	131
VYG 615-0,25-0,63	131
VYG 615-0,25-1	131
VYG 615-0,25-1,3	131
VYG 615-0,25-1,8	131
VYG 615-0,4-0,25	131
VYG 615-0,4-0,4	131
VYG 615-0,4-0,63	131
VYG 615-0,4-1	131
VYG 615-0,4-1,3	131
VYG 615-0,4-1,8	131
VYG 615-0,63-0,25	131
VYG 615-0,63-0,4	131
VYG 615-0,63-0,63	131
VYG 615-0,63-1	131
VYG 615-0,63-1,3	131
VYG 615-0,63-1,8	131
VYG 615-1-0,25	131
VYG 615-1-0,4	131
VYG 615-1-0,63	131
VYG 615-1-1	131
VYG 615-1-1,3	131
VYG 615-1-1,8	131
VYG 615-1,3-0,25	131
VYG 615-1,3-0,4	131

VYG 615-1,3-0,63	131
VYG 615-1,3-1	131
VYG 615-1,3-1,3	131
VYG 615-1,3-1,8	131
VYG 615-1,8-0,25	131
VYG 615-1,8-0,4	131
VYG 615-1,8-0,63	131
VYG 615-1,8-1	131
VYG 615-1,8-1,3	131
VYG 615-1,8-1,8	131
VYG 620 - 0,63 - 1,6	132
VYG 620 - 0,63 - 2,5	132
VYG 620 - 0,63 - 4	132
VYG 620 - 1 - 1,6	132
VYG 620 - 1 - 2,5	132
VYG 620 - 1 - 4	132
VYG 620 - 1,6 - 0,63	132
VYG 620 - 1,6 - 1	132
VYG 620 - 1,6 - 1,6	132
VYG 620 - 1,6 - 2,5	132
VYG 620 - 1,6 - 4	132
VYG 620 - 2,5 - 0,63	132
VYG 620 - 2,5 - 1	132
VYG 620 - 2,5 - 1,6	132
VYG 620 - 2,5 - 2,5	132
VYG 620 - 2,5 - 4	132
VYG 620 - 4 - 0,63	132
VYG 620 - 4 - 1	132
VYG 620 - 4 - 1,6	132
VYG 620 - 4 - 2,5	132
VYG 620 - 4 - 4	132
VYQ 215-1,2	141
VYQ 215-4,8	141
VYQ 220-8	141
VZC 215-PT-B	141
VZC 215-P-B	141
VZC 215-PT-D	141
VZC 215-P-D	141
VZC 220-P-F	141
VZC 220-PT-F	141
VZC 225-PT-G	141
W	
code	page
WEBGARAGE	164
WTD 911	63
WTW 900	63

X	
code	page
XCC 602	28
XCC 618	30
XCC 638	31
XCO 428	38
XCS 633	34
XDG 310	120
XDG 310/A	120
XDG 315	120
XDG 315/A	120
XDG 320	120
XDG 320/A	120
XDG 325	120
XDG 325/A	120
XDG 332	120
XDG 332/A	120
XDG 340	120
XDG 340/A	120
XDG 350	120
XDG 350/A	120
XGG 618	83
XLG 315	119
XLG 315/A	119
XLG 320	119
XLG 320/A	119
XLG 325	119
XLG 325/A	119
XLG 332	119
XLG 332/A	119
XLG 341	119
XLG 341/A	119
XLG 351	119
XLG 351/A	119
XPG 658	39
XPT 678	39
XSE 600	35
XSE 602	35
XSS 633	34
XTA 624	48
XTC 638	30
XTE 600	32
XTE 602	32
XTE 611	33
XTE 643	31
XTP 600	33
XTR 628	44
XTT 608	37

XTT 618	36
XTT 618/S1	36
XTU 614	49
XTU 614+XTU 644	51
XTU 618	47
XTU 644	50
XTU 664	52

Y	
code	page
YDG 2100	117
YDG 215	117
YDG 215A	117
YDG 220	117
YDG 220/A	117
YDG 225	117
YDG 225/A	117
YDG 232	117
YDG 232/A	117
YDG 240	117
YDG 240/A	117
YDG 250	117
YDG 250/A	117
YDG 265	117
YDG 280	117
YDG 215/INOX	118
YDG 215A/INOX	118
YDG 220/INOX	118
YDG 220A/INOX	118
YDG 225/INOX	118
YDG 225A/INOX	118
YDG 232/INOX	118
YDG 232A/INOX	118
YDG 240/INOX	118
YDG 240A/INOX	118
YDG 250/INOX	118
YDG 250A/INOX	118
YHC 700	16
YLC 880	16

Z	
code	page
ZBC 862	14
ZG-AFB	147
ZG-GMA	147
ZG-LF1	147
ZG-NMA	147
ZG-SMA	147
ZG-TF1	147
ZHC 602	14
ZR 2315	131, 132
ZR 2320	131, 132, 141
ZR 2325	141
ZRC 658	56

NOTES



PROGRAMMABLE CONTROLLERS



COMMUNICATION PROTOCOL



ENERGY EFFICIENCY FOR BUILDINGS



COMMUNICATION
PROTOCOLS



EHC 602

EDGE DEVICE MULTIPROTOCOL BACNET AND MODBUS

For prices contact
the sales network

Optimises communication with YLC / ZBC controllers and can manage and monitor field devices.

It manages three types of system :

- Adjustment with YLC 880 / ZBC 862 + corresponding expanders
- Energy monitoring
- Hybrid or Mixed (control and monitoring)


It is equipped with a web interface that can be reached via an Ethernet port or Wi-Fi. Possibility of installing a webgarage licence on the device up to a maximum of 2000 points.

It can work as stand-alone unit or in a network. Communication ports:

- 2 RS 485
- 1 M-Bus
- 1 C-Bus
- 2 Ethernet

12Vdc and 24Vac power supply.
6 module DIN enclosure.

Multi-protocol architecture with EHC 602

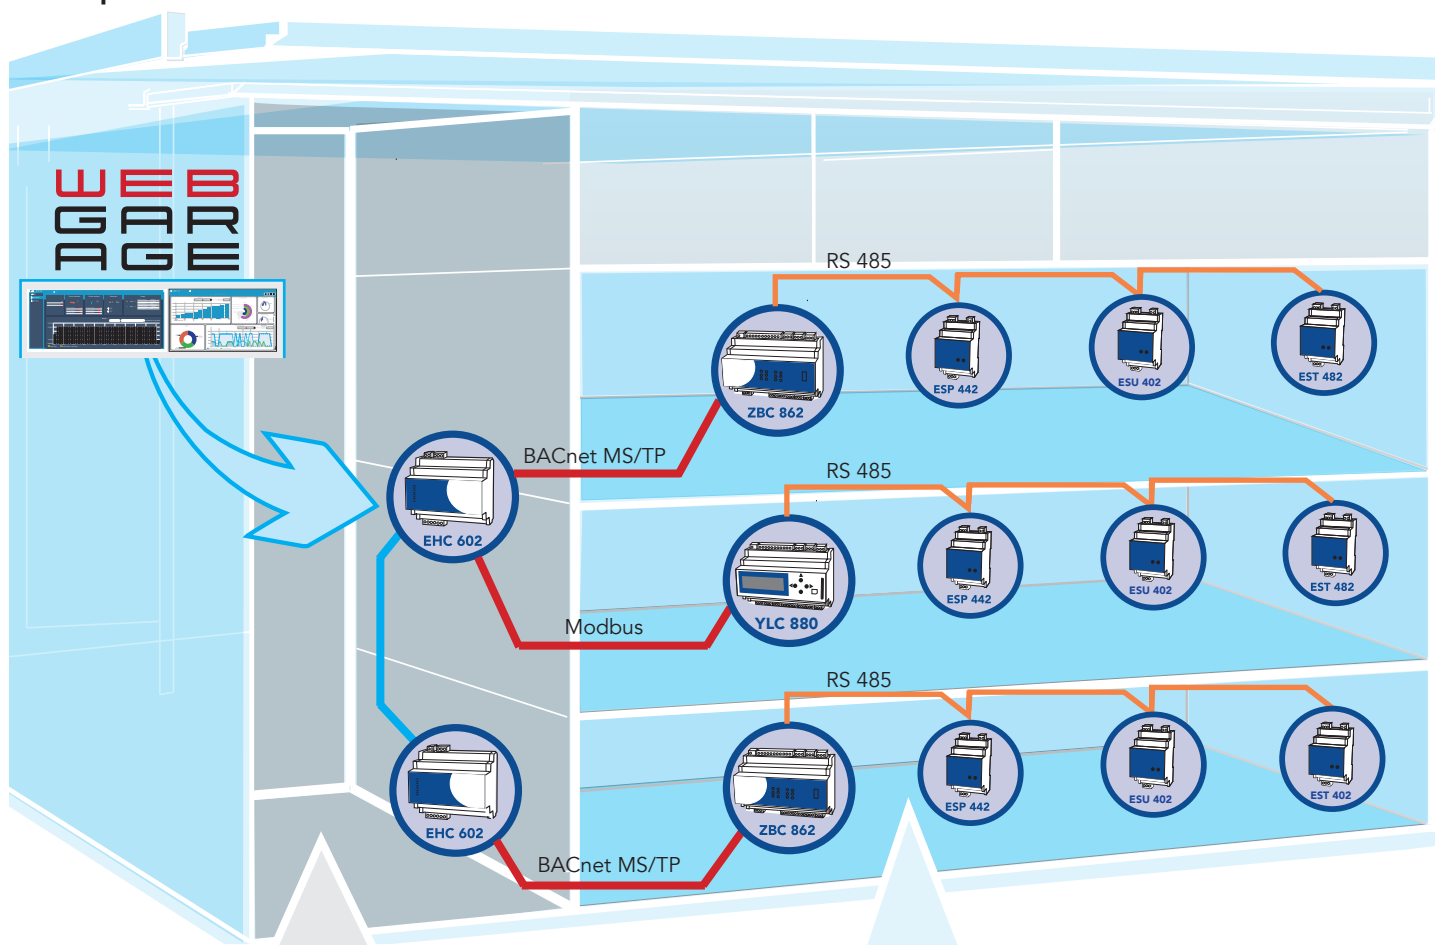

Edge Device to facilitate the communication of controllers and manage the transit of variables between them. Each Edge Device can hold up to 2000 licence points of the Webgarage supervision platform. The system architecture provides the Ethernet connection.



Controllers and expansion modules connected to each other via RS 485 bus or wireless bus. Each controller contains the logic for controlling the system (distributed intelligence). For each controller, it is recommended not to exceed 150 physical points.

In the systems where it is used, EHC 602 also allows the system to be managed remotely via Ethernet connectivity or 4G routers.

The EHC 602 supports embedded Webgarage licences of up to 2000 points*, providing the end user with a user-friendly, simple and effective interface.

EHC 602 maximises system performance with Y-series and Z-series controllers and enables the management of complex buildings with distributed intelligence solutions.



(*) Points licence not included to be dimensioned according to the needs of the system.



COMMUNICATION
PROTOCOLS



ZHC 602

GATEWAY FROM BACNET MS/TP TO GATEWAY BACNET IP

Remote accessibility to the supervision system via Ethernet cable using the BACNET/IP protocol.

Communication ports::

- 2 for RS 485 for BACnet MS/TP communication

12Vdc power supply.

6 module DIN enclosure.



COMMUNICATION
PROTOCOLS



ZBC 862

BACNET MS/TP CONTROLLER

Controller for HVAC systems programmable via CosterCAD applications. Download the application and firmware locally via USB port and remotely via BACnet protocol. Possible configuration through DSP 120 external display.

Communication ports:

- 1 RS 485 for BACnet MS/TP communication
- 1 RS 485 for expanders
- 1 RS 485 for integration of third-party devices.

12Vdc and 24Vac power supply.

8 module DIN enclosure.

INPUT/OUTPUT

UI ⁽¹⁾	AO	DO
8	2	6

RELATED PRODUCTS


DSP 120	Display for configuration ZBC 862
SUP 120	Front panel support for display
USB 011	USB/RJ11 cable for debug ZBC 862

The ZBC 862 is a freely programmable logic controller capable of controlling HVAC-R systems; the number of inputs and outputs referring to the individual controller can be increased by means of expansion modules.

Main features:

- Execution and control application generated with CosterCAD and/or CosterDiagram.
- Communication with the monitoring system and other devices using the BACnet protocol.
- Optimised application execution time.
- Interoperability with any BACnet system.


Coster Diagram example: Programming with logical function blocks

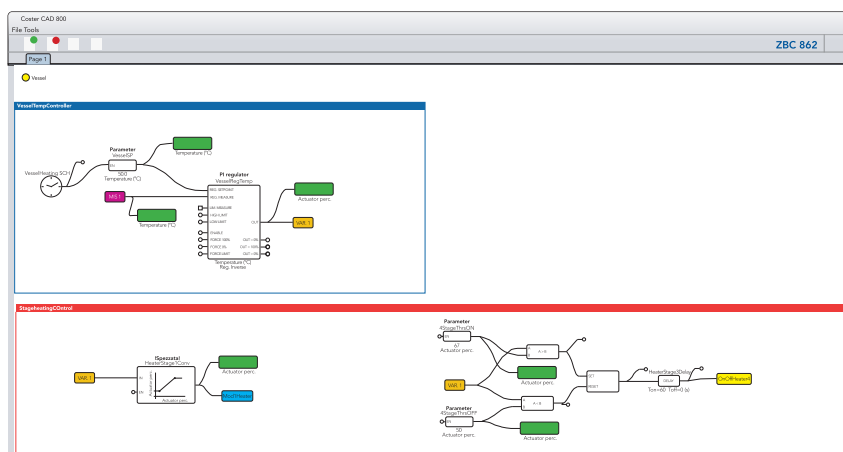

⁽¹⁾ The universal inputs are: analogue, digital and resistive sensors

The first two are also 4...20 mA

Bacnet IP architecture with Z series controllers

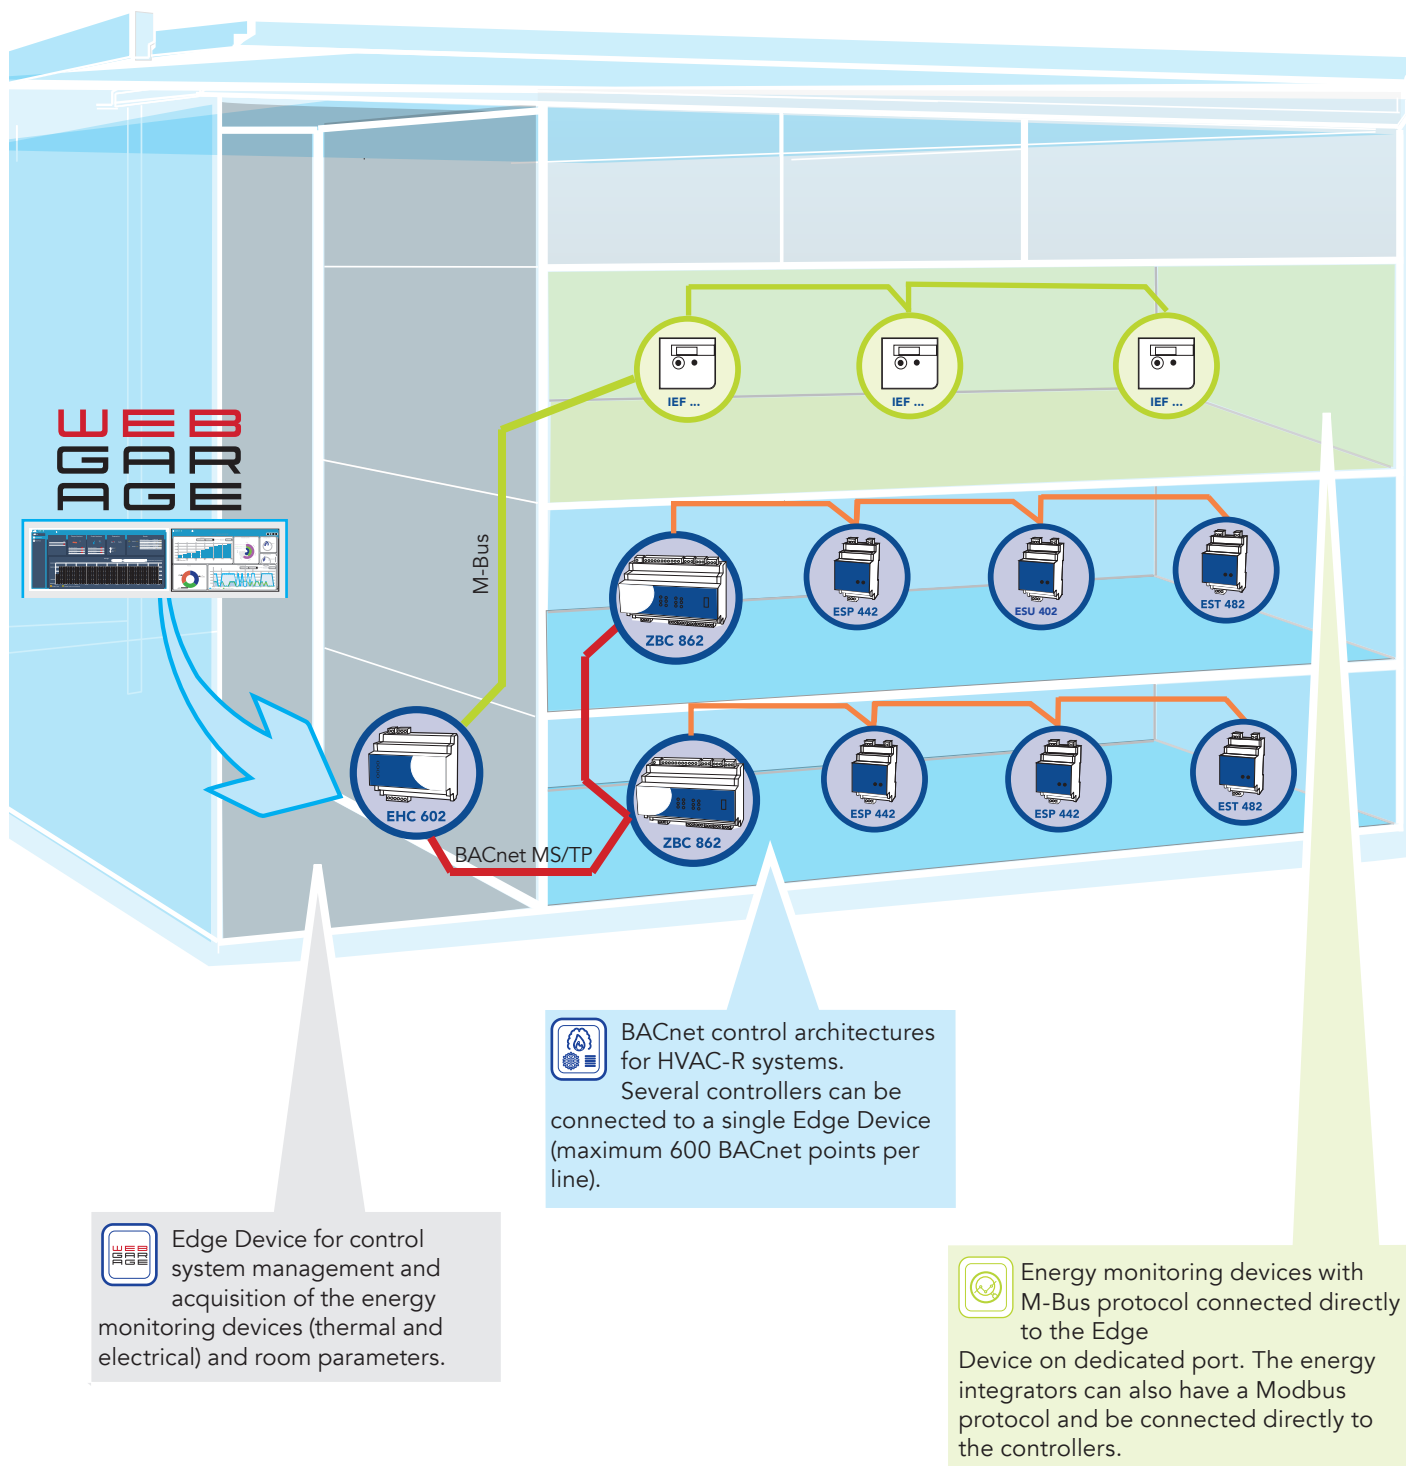



COMMUNICATION
PROTOCOLS



YHC 700

MODBUS/TCP NETWORK-MANAGER

Optimises the exchange of data and commands between YLC controllers and the alarm relay, allowing remote access to the supervision system via the Ethernet port using MODBUS/TCP protocol.

It manages three types of system:


- Control with YLC 880
- Energy monitoring
- Hybrid or Mixed (control and monitoring)

Applied to control systems, the YHC allows remote management of the system and remote configuration via webserver through its Ethernet port or via SIM connectivity. It can work as stand-alone unit or in a network:

- 1 RS 485 for Modbus (YLC 880)
- 1 RS 485 for monitoring Modbus
- 1 RS232
- 1 Ethernet

12V dc power supply.

6 module DIN enclosure.



COMMUNICATION
PROTOCOLS



YLC 880

PROGRAMMABLE CONTROLLER

Multi-configurable controller for heating, cooling and domestic hot water systems, with the possibility of extending the application logic via CosterDiagram.

The controller allows optimisation of consumption by automatically adapting to climatic variations, implementing management algorithms aimed at maximum attainable performance. The expansion modules allow the number of inputs and outputs referred to the single controller to be increased. The controller also records the behaviour of the system, storing operating parameters and settings, allowing for the analysis and detection of any faults.

Programming is carried out using COSTER CAD software and can be imported into the control unit via SD card.

Communication ports:

- 1 RS 485 for Modbus communication
- 1 RS 485 for expanders
- 1 RS 485 for integration of third-party devices.

12Vdc power supply.

8 module DIN enclosure.

INPUT/OUTPUT

1-wire ⁽¹⁾ sensors	UI (digital/ analogue)	DO	AO
16	8	8	2

RELATED PRODUCTS

SDC 020

SD card

USB 485

Cable required for connection to device

⁽¹⁾ Bus sensor input


Y-series system architecture

Management and control of the heating and cooling plant via YLC.

The example shows an architecture with JOY-type room control devices integrated directly into Webgarage.



The exchange of variables is facilitated by EHC 602 on which the supervision system can be allocated.

The network includes an Ethernet backbone and a horizontal distribution performed in Modbus.

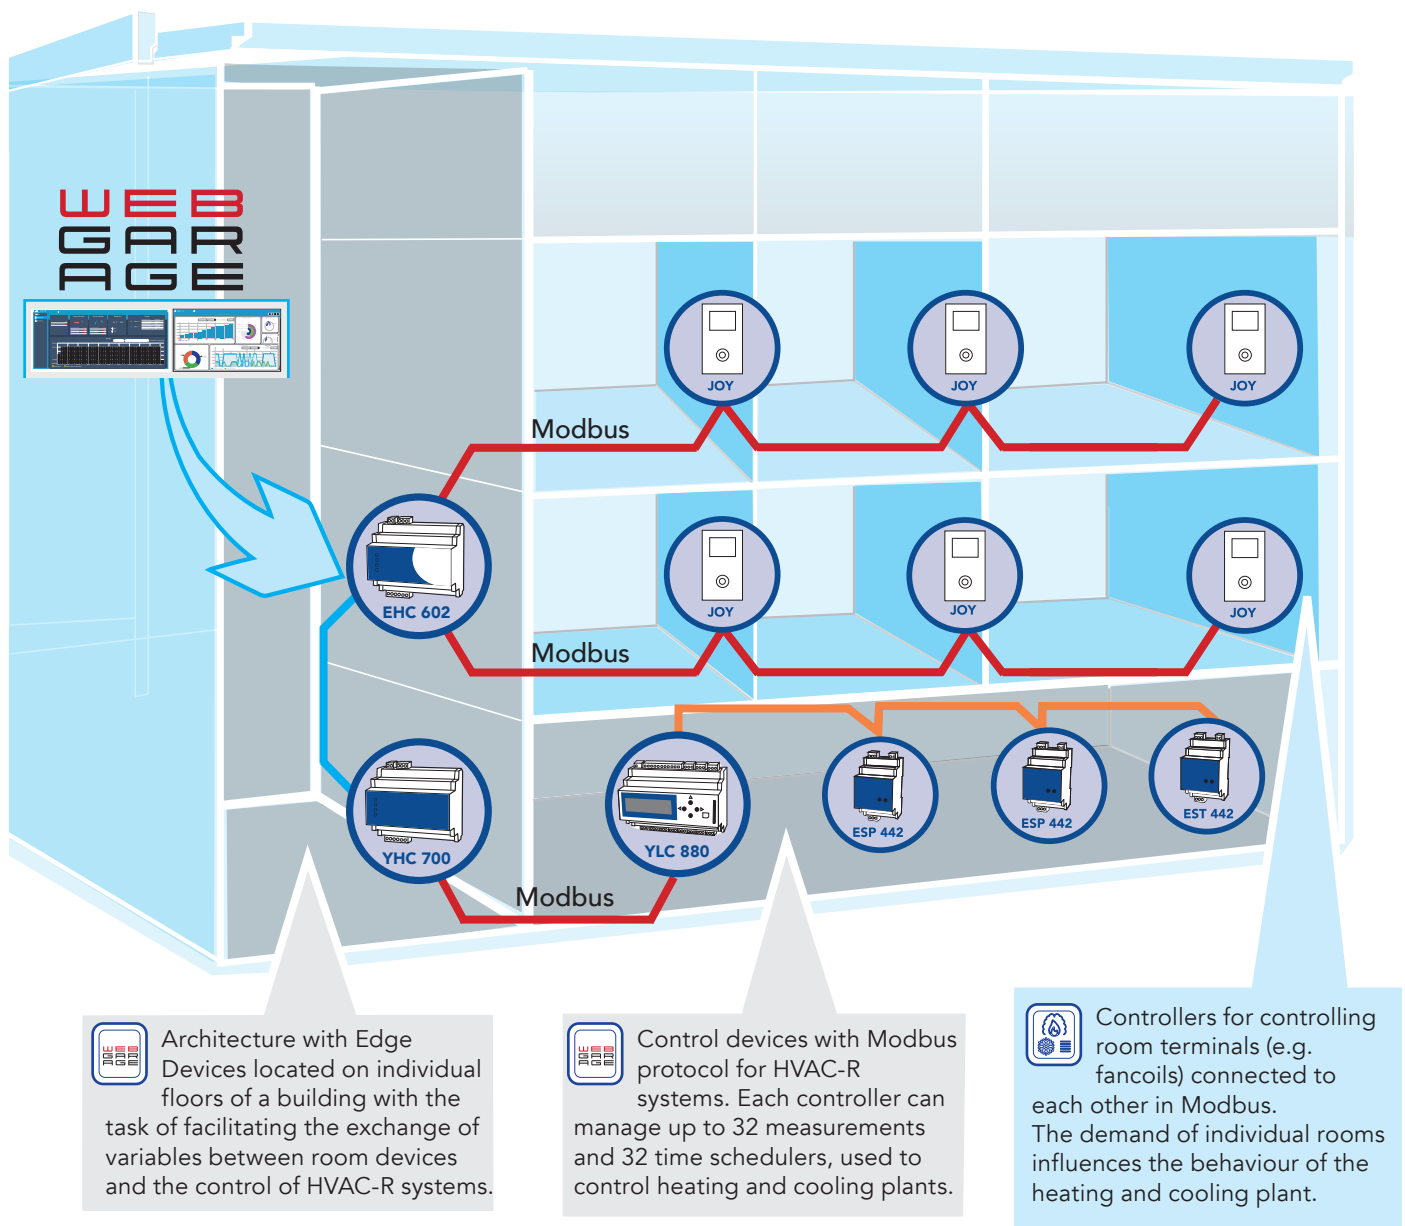

Synoptics performed with Coster Tool

For programming and remote control systems for HVAC-R systems

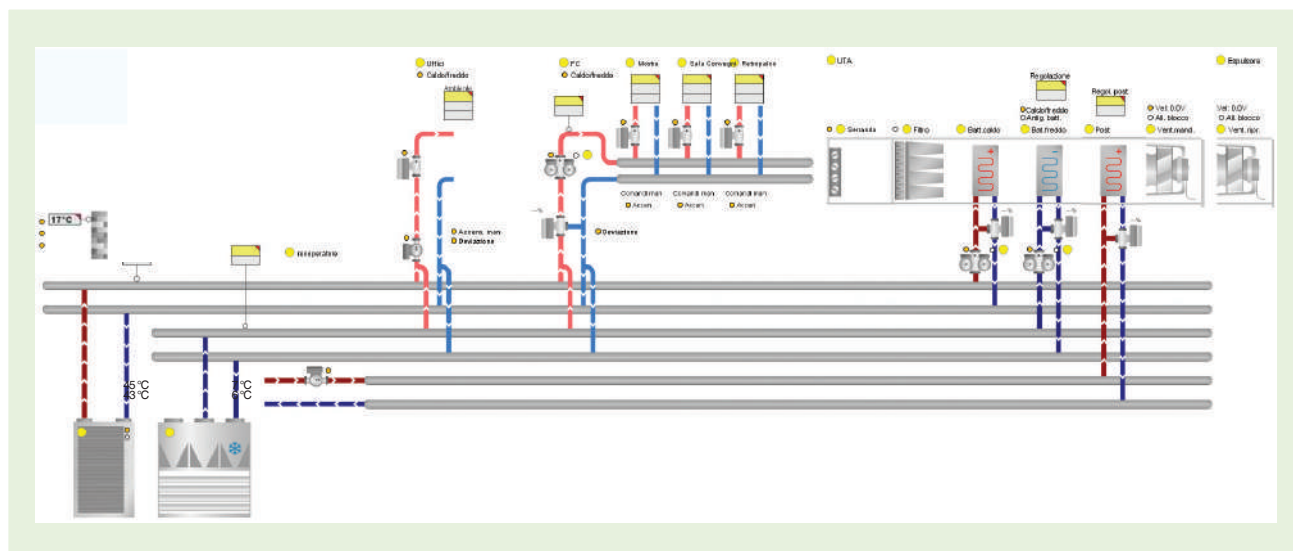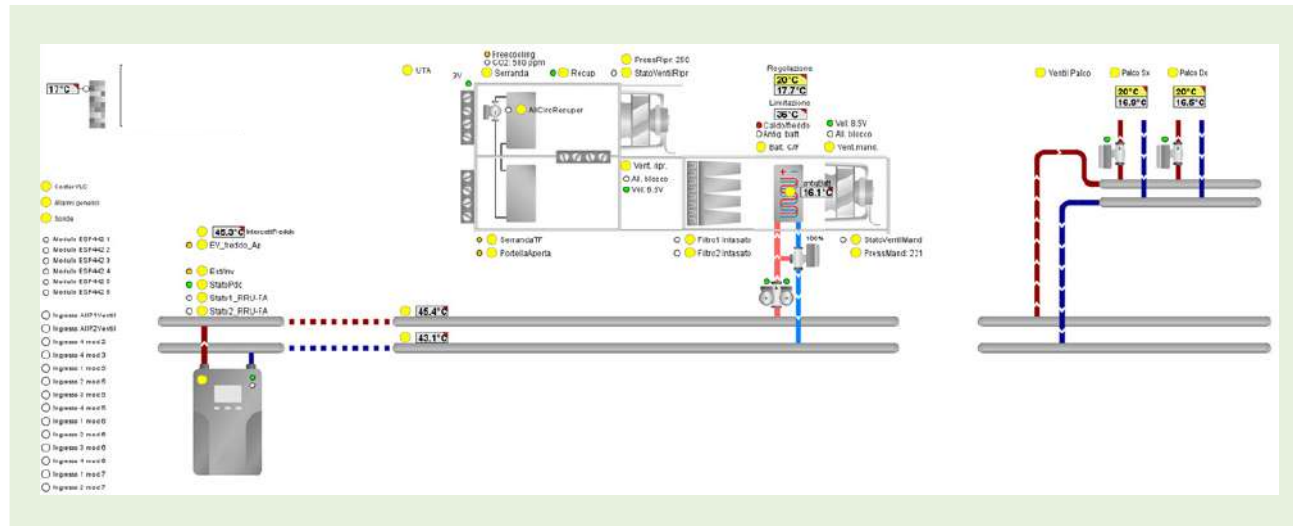

The main functionalities of the YLC 880 are:

- Execution of adjustment and control application generated with CosterCAD and/or CosterDiagram.
- Communication with the monitoring system and other devices using the standard Modbus protocol.
- Possibility of system parameterisation via on-board display.



COMMUNICATION
PROTOCOLS



EST 482

EXPANTION MODULE

Expansion module with 8 universal inputs (digital, analogue and sensors⁽¹⁾) capable of communicating with YLC and ZBC controllers.
The expansion module is provided with RS 485 port that makes communication possible with the main controller through Modbus/RTU protocol.
12Vdc and 24Vac power supply.
4 module DIN enclosure.



COMMUNICATION
PROTOCOLS



ESU 402

EXPANSION MODULE

Expansion module with 4 analogue 0-10V dc outputs which can communicate with the YLC 880 control unit and with ZBC 862.
The expansion module is provided with RS 485 port that makes communication possible with the main controller through Modbus/RTU protocol.
12Vdc e 24Vac power supply.
4 module DIN enclosure.



COMMUNICATION
PROTOCOLS



ESP 442

MODULO DI ESPANSIONE

Expansion module I/O able to communicate with the YLC 880 and ZBC 862 control units. The expansion module is provided with RS 485 port that makes communication possible with the main controller through Modbus/RTU protocol.
12 Vdc and 24 Vac power supply.
4 module DIN enclosure.

INPUT/OUTPUT

Sensors ⁽³⁾	DI / AI ⁽²⁾	DO
2	4	4

(1) PT1000, NTC 10K, NTC 1K, T5, PT 1000 extended , Ni 1000, Potentiometer
(2) AI: 0-10V
(3) PT1000, NTC 10K, NTC 1K, T5, PT 1000 extended



COMMUNICATION
PROTOCOLS



BRG 868

WIRELESS BRIDGE MODULE

BRG 868 Bridge Module is a tool that allows a wireless connection⁽¹⁾ to be created between the BRG 868C Bridge Concentrator and one or more field devices.

ANTENNA INCLUDED

1 module DIN enclosure.

BRG 868 Wireless bridge module

RELATED PRODUCTS

APA 500 Prolunga antenna SMA lunghezza 5 metri



COMMUNICATION
PROTOCOLS



BRG 868C

WIRELESS BRIDGE CONCENTRATOR

The BRG 868 C Concentrator is a device for creating a wireless connection⁽¹⁾ between a Master and one or more BRG 868s (up to 7) in turn connected to field devices via RS485 port.

ANTENNA INCLUDED

1 module DIN enclosure.

BRG 868 Concentratore bridge wireless

RELATED PRODUCTS

APA 500 Prolunga antenna SMA lunghezza 5 metri

ANT 868 Antenna potenziata per concentratori 868

USB 485 Necessario per collegamento diretto con regolatori YLC 880, CSW 868



COMMUNICATION
PROTOCOLS



CSW 868

WIRELESS SENSOR CONCENTRATOR

System module enabling wireless connection with one or more radio devices (up to 40):

- THP 868
- PCP 868
- COP 868
- STT 868H
- STU 868H
- ATR 868

It provides two-way communication with wireless field devices. Can be combined with Y... and Z... series controllers, or with EHC 602 or YHC 700.

12V dc power supply.

ANTENNA INCLUDED.

1 module DIN enclosure.

CSW 868 Wireless sensor concentrator

RELATED PRODUCTS

APA 500 SMA antenna extension, length 5 meters

ANT 868 Upgraded antenna for 868 concentrators

⁽¹⁾ As an alternative to cable type connection.



ALM 1210

DIN RAIL POWER SUPPLY 12V - 10W

Ultra-slim 10 W power supply on DIN mounting. Suitable for installation on DIN mounting TS 35-/7 5. or 15.

1 module DIN enclosure.

ALM 1210 DIN rail power supply 12V - 10W



ALM 1225

DIN RAIL POWER SUPPLY 12V - 25W

Ultra-slim 25 W power supply on DIN mounting. Suitable for installation on DIN mounting TS 35-/7 5. or 15.

2 module DIN enclosure.

ALM 1225 DIN rail power supply DIN 12V - 25W

Q 88.**SERIES ELECTRICAL PANELS WITH 2G CONNECTIVITY**

Electrical panels created specifically for Building Automation systems complete with control equipment.

Main component YLC 880 multi-configurable controller.

For other compositions contact your local retailer.

PANEL with YLC 880 + MDM 232

	Switch 230V	ALM 1225	MDM 232	YLC 880	EST 482	ESP 442	ESU 402	PANEL
Q880	1	1	1	1	1			2 X 18
Q881	1	1	1	1	1		1	3 X 18
Q882	1	1	1	1	1	1	1	3 X 18
Q883	1	1	1	1	1	1	2	3 X 18
Q884	1	1	1	1	1	2	2	3 X 18

Q 38.**SERIES ELECTRICAL PANELS WITH 4G CONNECTIVITY**

Electrical panels created specifically for Building Automation systems complete with control equipment.

Main components of YLC 880 multi-configuration controller and the RUT 302 router.

For other compositions contact your local retailer.

PANEL with YLC 880 + RUT 302

	Switch 230V	ALM 1225	RUT 302	YLC 880	EST 482	ESP 442	ESU 402	PANEL
Q380	1	1	1	1	1			2 X 18
Q381	1	1	1	1	1		1	3 X 18
Q382	1	1	1	1	1	1	1	3 X 18
Q383	1	1	1	1	1	1	2	3 X 18
Q384	1	1	1	1	1	2	2	3 X 18

Electrical panels cannot be supplied without devices.



GPC 642 CONFIGURABLE CONTROLLER

COMMUNICATION PROTOCOLS





COMMUNICATION
PROTOCOLS



GPC 642

COMPACT CONTROLLER WITH INCORPORATED 4G MODEM

Compact controller with pre-loaded applications.
6-module DIN device, with built-in 4G communication engine.
Control and remote management with Climaoffice and Webgarage.

Communication ports:

- 1 RS 485 for Modbus communication
- 1 M-bus up to 5 device

12Vdc and 24Vac power supply.
6 DIN module enclosure.

INPUT/OUTPUT

UI	DO	AO
6	4	1

The GPC 642 is a compact controller with preconfigured logic and integrated 4G connectivity; it provides a predefined set of applications, suitable for the simplest and most common cases of control and metering systems.

For some applications, it is possible to expand the system via expansion modules. GPC 642 acquires the wireless sensors via CSW 868.

The main functionalities of the GPC 642 are:

- Execution of adjustment and control application
- Configuration and parameterisation of the device remotely via engine 4G or locally via USB micro port.
- Acquisition of metering data from connected M-BUS devices
- Communication with the supervision system via the Modbus protocol

The use of GPC 642 allows a flexible and intelligent management of resources, aimed at exploiting the potential offered by each resource in the field.

QGP.


ELECTRICAL PANELS WITH GPC 642

For other compositions contact your local retailer

PANELS with GPC 642

	Switch 230V	ALM 1225	GPC 642	ESP 442	ESU 402	CSW 868	PANEL
QGP0	1	1	1				1 X 18
QGP1	1	1	1	1			2 X 18
QGP2	1	1	1		1		2 X 18
QGP3	1	1	1	1	1		2 X 18
QGP0-1	1	1	1			1	1 X 18
QGP1-1	1	1	1	1		1	2 X 18
QGP2-1	1	1	1		1	1	2 X 18
QGP3-1	1	1	1	1	1	1	2 X 18

Synoptics for thermal power plant control

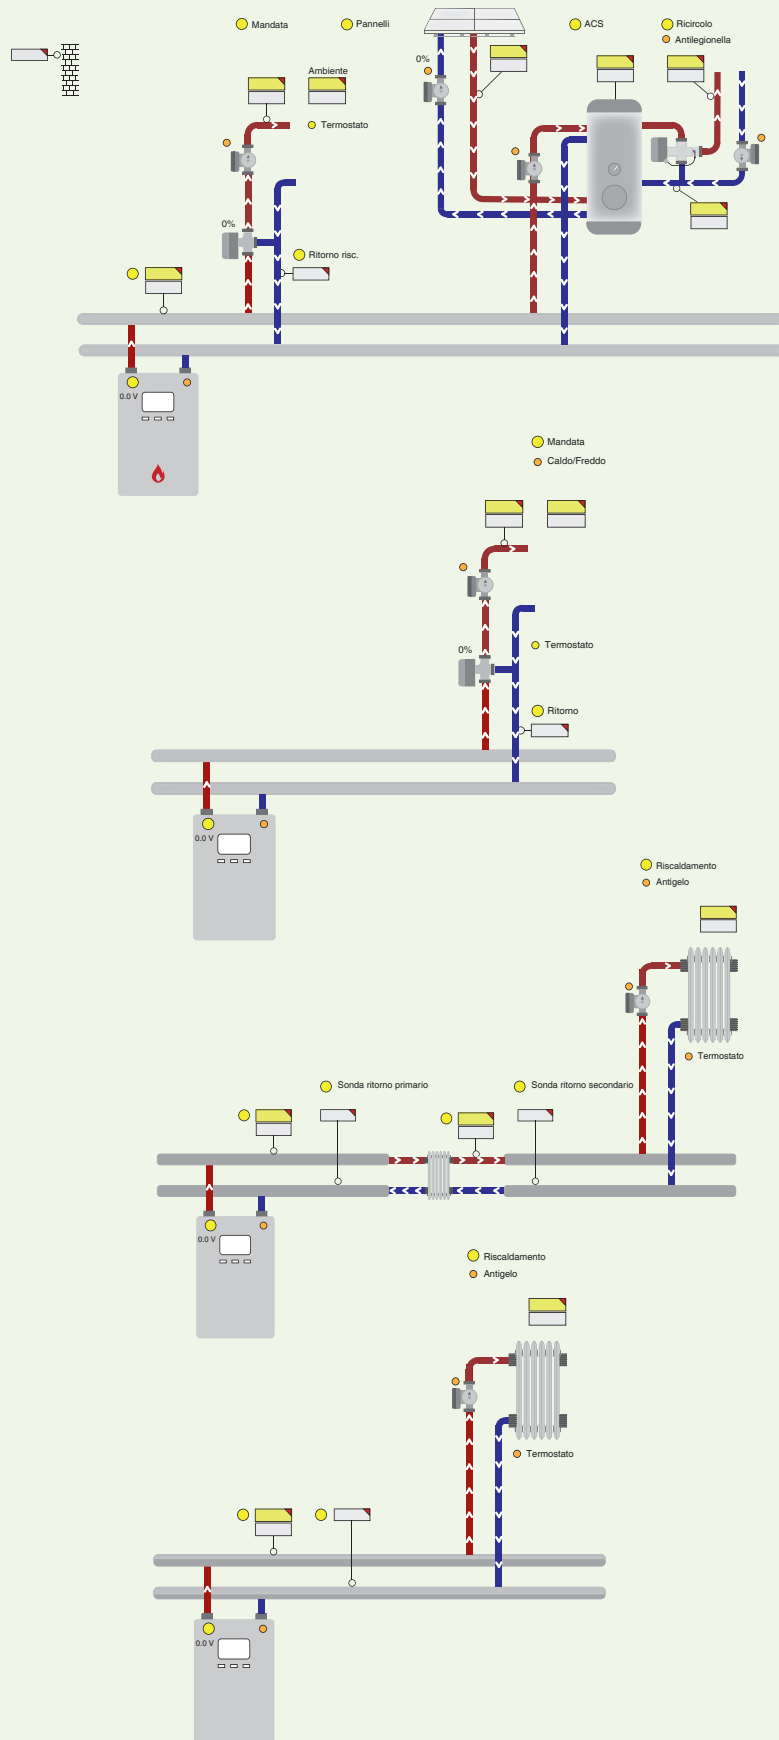

Climate control of the system in heating mode with DHW.

This application allows climate control, intervening directly on the flow temperature of the system, according to the external climate conditions and the room temperature. It allows you to manage the domestic hot water circuit with or without the aid of renewable energy sources.

Requires an additional ESP 442 expansion module.

Mixed climate

This application allows climate control, intervening directly on the flow temperature of the system, according to the external climate conditions and the room temperature.

The On/Off control of a hot/cold boiler and a mixing valve with 0-10 V or 3 points control are managed.

ZDV boiler in temperature with exchanger


This application manages a climate heating circuit and a boiler with 0-10V temperature command.

ZDV Boiler in Temperature

This application manages a climate heating circuit and a boiler with 0-10V temperature control.


ZDV boiler in Power

This application manages a climate heating circuit and a boiler with 0-10V power control.

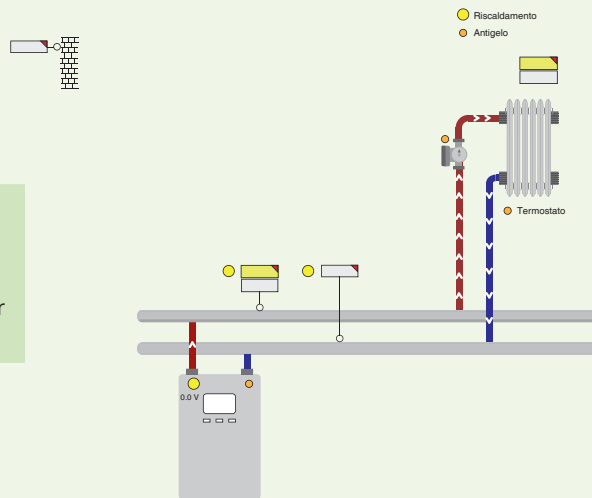

Power Boiler ZDV with exchanger

This application manages a climate heating circuit and a boiler with 0-10V power control.

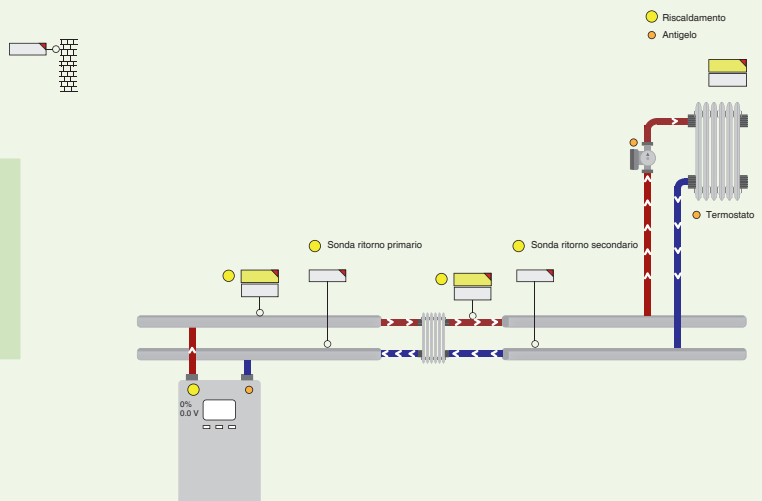



District heating application

Suitable for secondary circuit temperature control of the exchangers supplying the district heating substations..

Orario supplementare

Utenza

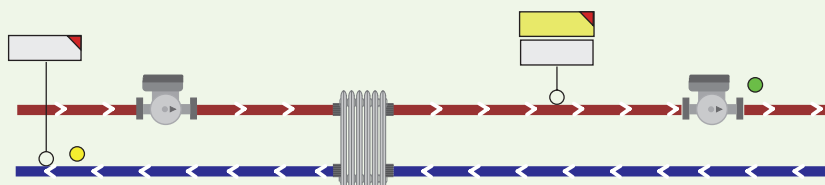

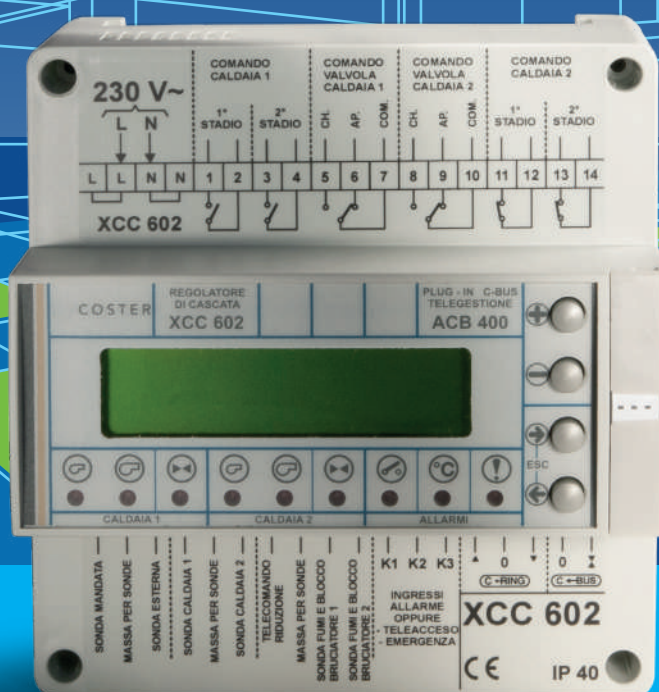

PRECONFIGURED CONTROLLERS



COMMUNICATION PROTOCOLS

C←BUS **C←RING** **P←LOC** RS 232



COMMUNICATION
PROTOCOLS


OPTIONAL
C-BUS **C-RING**

XCC 602

CONTROLLER FOR SEQUENCE OF 2 BOILERS

Controller for sequence of 2 boilers
Cascade command of 2 single-stage or two-stage
boilers with or without shut-off valves

ESSENTIAL SENSOR: 1 collector temperature sensor
2 boiler sensors
OPTIONAL SENSORS: 1 outside sensor,
1 flue gas temperature sensor

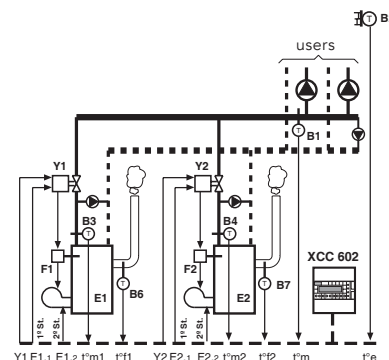

XCC 602 Sequence controller of 2 boilers

RELATED PRODUCTS

ACB 400	Card for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99°C)
SAF 010	Cable type temperature sensor (0...100 °C)
STF 001	Flue gas temperature sensor (0...500 °C)
SCH 010	Surface temperature sensor (0...100 °C)
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS **C-RING**

DTC 648

CLIMATE CONTROLLER FOR BOILERS IN SEQUENCE (UP TO 24 BOILERS)

ISC 648


RELAY COMMAND MODULE

Cascade command of multiple single-stage or two-
stage boilers with or without shut-off valves composed of:

- 1 climate controller for boiler cascade command;
- 1...3 relay command modules for single/two stage burners and shut-off valves.

ESSENTIAL SENSOR: 1 collector or system flow sensor

OPTIONAL SENSORS: 1 outside sensor, 1 sonda sensor

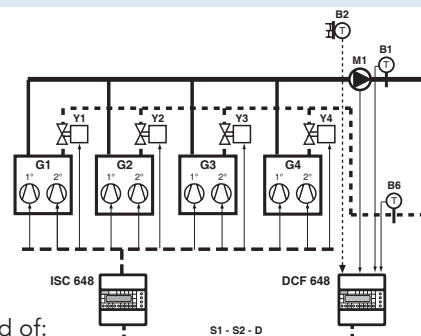

DTC 648 Climate controller for sequence of boilers

ISC 648 Relay control modules

RELATED PRODUCTS

SIH 010	Immersion temperature sensor (0...99°C)
STH 001	High-temperature immersion sensor (0...300 °C)
SAE 001	Outside temperature sensor (-40...40 °C)
ASA 420	Accessory for connecting 4...20 mA DC active sensors. Converts the 4...20mA signal to an analogue signal
ACD 655	Front panel mounting accessory



DEVICES	Boilers with burners valves 1 stage	Boilers with burners valves 1 stage	Boilers with burners valves 2 stages	Boilers without burners valves 2 stages
1 DTC 648 + 1 ISC 648	up to 4	up to 8	up to 4	up to 4
1 DTC 648 + 2 ISC 648	up to 8	up to 16	up to 8	up to 8
1 DTC 648 + 3 ISC 648	up to 12	up to 24	up to 12	up to 12



DCF 648

CLIMATE CONTROLLER
REFRIGERATION OR HEAT PUMP
UNIT SEQUENCE



ISC 648


RELAY COMMAND MODULE

Cascade command of refrigeration units and heat pumps with or without shut-off valves consisting of:

- 1 climate controller for cascade command;
- 1...3 relay command modules for single/two stage units and shut-off valves.

ESSENTIAL SENSOR: 1 collector or system flow sensor

OPTIONAL SENSOR: 1 outside sensor; 1 generic sensor

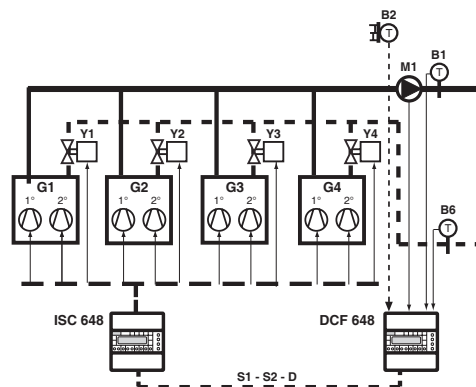

COMMUNICATION
PROTOCOLS

OPTIONAL
C←BUS C←RING

DCF 648 Climate controller refrigeration or heat pump units sequence

ISC 648 Relay control modules

RELATED PRODUCTS

SAE 001 Outside temperature sensor (−40...40 °C)

SIH 010 Immersion temperature sensor (0...99 °C)

SIH 010 Immersion temperature sensor
(0...99 °C display only)

SAF 010 Outside temperature sensor (−40...40 °C)

ASA 420 Accessory for connecting 4...20 mA DC active sensors.
Converts the 4...20mA signal to an analogue signal

ACD 655 Front panel mounting accessory

DEVICES	Boilers with burner valves 1 stage	Boilers with burner valves 1 stage	Boilers with burner valves 2 stages	Boilers without burner valves 2 stages
1 DCF 648 + 1 ISC 648	up to 4	up to 8	up to 4	up to 4
1 DCF 648 + 2 ISC 648	up to 8	up to 16	up to 8	up to 8
1 DCF 648 + 3 ISC 648	up to 12	up to 24	up to 12	up to 12



COMMUNICATION
PROTOCOLS


OPTIONAL
C-BUS **C-RING**

XTC 638

OPTIMISING COMPENSATOR FOR
CENTRAL HEATING SYSTEM PLANT
BURNERS OF ANY KIND, COMPLETE
WITH SEQUENCE FOR SEVERAL BOILERS

Suitable for temperature control of any type of boiler.
Controls the sequence of up to 7 boilers,
all equipped with XCC 638 or XCC 618 controller.

ESSENTIAL AND OPTIONAL SENSORS:
See the data sheet, for the system type

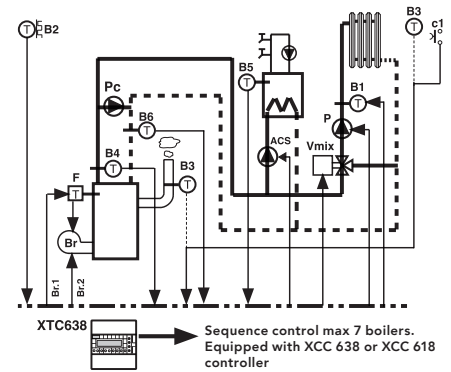

XTC 638 Optimising compensator for central heating system with
sequence control

RELATED PRODUCTS

ACB 460	Card for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
SAF 010	Cable type temperature sensor (0...100 °C)
STF 001	Flue gas temperature sensor (0...500 °C)
SCH 010	Surface temperature sensor (0...100 °C)
SAB 010	Flue gas temperature sensor (0...40 °C)
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS


OPTIONAL
C-BUS **C-RING**

XCC 618

CONTROLLERS FOR BOILERS
1, 2 STAGES, MODULATING 3 POINTS
OR 0...10 V DC INPUT

Suitable for total boiler control for condensation
and non-condensation boilers.
Under the control of XTC 638, it can put the boiler
in sequence with others (up to 7).

ESSENTIAL SENSOR: 1 boiler sensor
OPTIONAL SENSORS: 1 anticondensing sensor,
1 flue gas, 1 outside

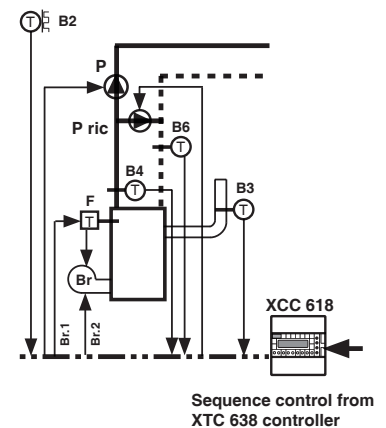

XCC 618 Climate optimiser for burners

RELATED PRODUCTS

ACB 400	Card for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
SAF 010	Cable type temperature sensor (0...100 °C)
STF 001	Flue gas temperature sensor (0...500 °C)
SCH 010	Surface temperature sensor (0...100 °C)
ACD 655	Front panel mounting accessory

COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS C←RING


XCC 638

OPTIMISING COMPENSATOR FOR
BOILERS 1, 2 STAGE MODULATING
BURNERS 3 POINTS OR WITH 0...10 V DC
INPUT

Suitable for total boiler control for condensation
and non-condensation boilers.

Under the control of XTC 638, it can put
the boiler in sequence with others (up to 7).

ESSENTIAL SENSOR: 1 boiler sensor
1 outside sensor
OPTIONAL SENSORS: 1 anticondensing sensor
1 room or flue gas
1 boiler sensor

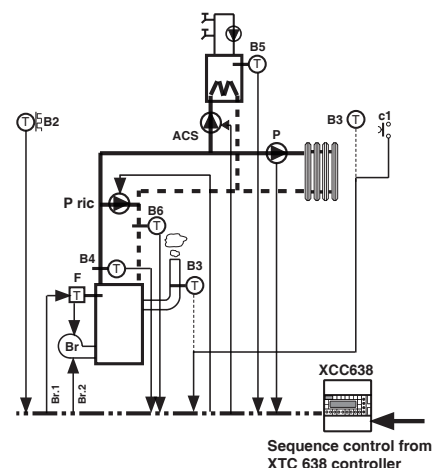

XCC 638 Climate optimiser for boilers

RELATED PRODUCTS

ACB 400	Card for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
STF 001	Flue gas temperature sensor (0...500 °C)
SCH 010	Surface temperature sensor (0...100 °C)
SAB 010	Room temperature sensor (0...40 °C)
ACD 655	Front panel mounting accessory

COMMUNICATION
PROTOCOLS

NO REMOTE MANAGEMENT


C←RING

XTE 643

DIGITAL CLIMATE CONTROLLER
FOR CENTRAL HEATING PLANT

Suitable for the climate control of a
central heating and domestic hot water control system.

ESSENTIAL SENSOR: 1 outside sensor,
1 system flow sensor
OPTIONAL SENSORS AND ACCESSORIES:
1 boiler sensor,
1 anticondensing sensor,
1 remote control

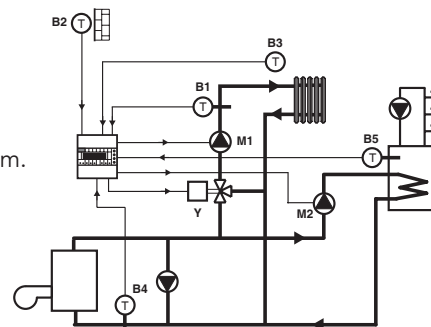

XTE 643 Climate controller and controller for domestic hot water
(DHW) production

RELATED PRODUCTS

SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
STF 001	Flue gas temperature sensor (0...500 °C)
SCH 010	Surface temperature sensor (0...100 °C)
SAB 010	Room temperature sensor (0...40 °C)
CDB 300	Remote control to change the program in use
ACD 655	Front panel mounting accessory to replace RTE 98.



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS **C-RING**

XTE 600

OPTIMISING COMPENSATOR

FOR CENTRAL HEATING SYSTEM


OPTIONAL REMOTE MANAGEMENT

Suitable for the climate optimisation of a central heating system and control of domestic hot water.

ESSENTIAL SENSORS: 1 outside sensor, 1 plant flow sensor

SENSORS AND ACCESSORIES: 1 room sensor, 1 flue gas sensor or 1 remote control,

OPTIONAL: 1 sensor 4...20mA DC, 1 anti-condensation sensor

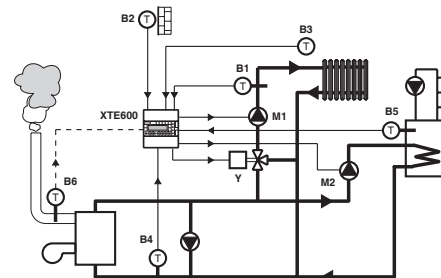

XTE 600 Optimiser compensator

RELATED PRODUCTS

ACB 468	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
STF 001	Flue gas temperature sensor (0...500 °C)
SCH 010	Surface temperature sensor (0...100 °C)
SAB 010	Room temperature sensor (0...40 °C)
CDB 300	Remote control to change the program in use
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS **C-RING**

XTE 602

OPTIMISER COMPENSATOR OF


TEMPERATURE & FLOW

OPTIONAL REMOTE MONITORING

Suitable for climatic optimisation of two central heating circuits.

ESSENTIAL SENSORS : 1 outside sensor
2 plant flow sensor

SENSORS AND ACCESSORIES: 1 or 2 room sensors,
1 anticondensing sensor,
1 remote control

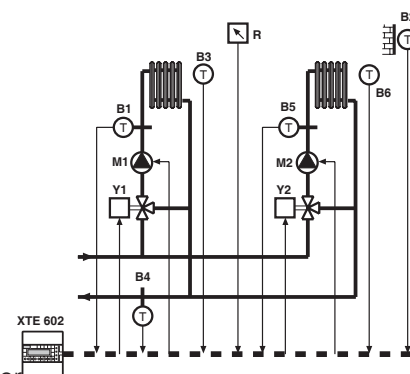

XTE 602 Optimiser compensator

RELATED PRODUCTS

ACB 468	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
SCH 010	Surface temperature sensor (0...100 °C)
SAB 010	Room temperature sensor (0...40 °C)
CDB 300	Remote control to change the program in use
ACD 655	Front panel mounting accessory

COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS

C←RING

XTE 611


OPTIMISER COMPENSATOR
FOR HEATING PLANT ROOM
OPTIONAL REMOTE MONITORING

Suitable for climate optimisation of a heating system with:

- climate optimisation of a heating plant with:
- control of a central heating system
- control of domestic hot water
- control of two single-stage burners or one two-stage burner

ESSENTIAL SENSORS: 1 outside sensor, 1 boiler sensor, 1 plant flow sensor

OPTIONAL SENSORS AND ACCESSORIES: 1 room sensor, 1 boiler sensor
1 or 2 flue gas sensors, 1 remote control.

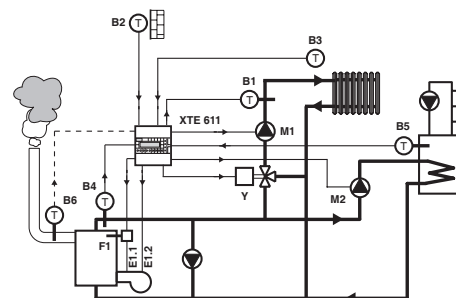

XTE 611 Optimiser compensator

RELATED PRODUCTS

ACB 468 Plug-in for communication via C-Bus

SAE 001 Outside temperature sensor (−40...40 °C)

SIH 010 Immersion temperature sensor (0...99 °C)

STF 001 Flue gas temperature sensor (0...500 °C)

SCH 010 Surface temperature sensor (0...100 °C)

SAB 010 Room temperature sensor (0...40 °C)

CDB 300 Remote control to change the program in use

ACD 655 Front panel mounting accessory

COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS

C←RING


XTP 600

OPTIMISER COMPENSATOR OF
TEMPERATURE & FLOW
OPTIONAL REMOTE MONITORING
SUITABLE FOR CONDENSATION BOILERS

Suitable for the climate optimisation of a central heating system, optimising the flow rate through the control of a variable speed circulation pump. It optimises the efficiency of condensing boilers.

ESSENTIAL SENSORS: 1 outside sensor, 1 return site sensor,

SENSORS AND ACCESSORIES OPTIONAL: 1 heating flow sensor
1 room sensor, 1 boiler sensor
1 flue gas sensor, 1 remote control

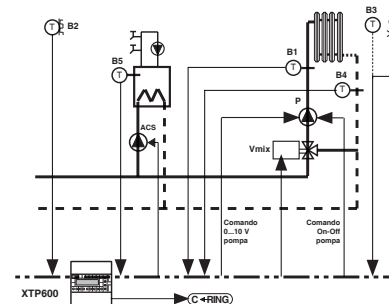

XTP 600 Optimiser compensator

RELATED PRODUCTS

ACB 468 Plug-in for communication via C-Bus

SAE 001 Outside temperature sensor (−40...40 °C)

SIH 010 Immersion temperature sensor (0...99 °C)

STF 001 Flue gas temperature sensor (0...500 °C)

SCH 010 Surface temperature sensor (0...100 °C)

SAB 010 Room temperature sensor (0...40 °C)

CDB 300 Remote control to change the program in use

ACD 655 Front panel mounting accessory



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS **C-RING**

XCS 633


COMPENSATING CONTROLLER WITH
SEASON SWITCHING

OPTIONAL REMOTE MONITORING

Winter and summer climate control of fan coil or radiant panel plant flow temperature.

ESSENTIAL SENSORS: 1 outside sensor
1 plant flow sensor

OPTIONAL SENSORS AND ACCESSORIES: 1 room sensor,
1 temperature/humidity room sensor,
1 remote control,

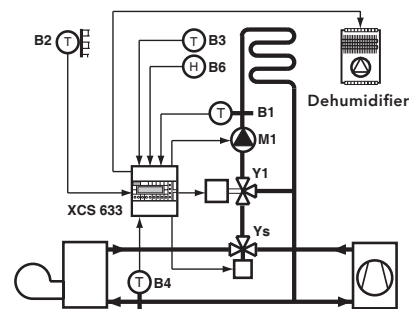

XCS 633 Summer/winter climate optimiser

RELATED PRODUCTS

ACB 468	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
SCH 010	Surface temperature sensor (0...100 °C)
SAB 010	Room temperature sensor (0...40 °C)
SAU 914	Relative humidity and temperature sensor
CDB 333	Remote control to change the program in use
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS **C-RING**

XSS 633

COMPENSATING CONTROLLER WITH
SEASON SWITCHING


OPTIONAL REMOTE MONITORING

SLAVE UNIT FOR MULTICOSTER SYSTEM

Winter and summer control of fan coil or radiant panel plant flow temperature.

ESSENTIAL SENSORS: 1 outside sensor,
1 flow sensor

OPTIONAL SENSORS AND ACCESSORIES: 1 room sensor,
1 room temperature/humidity sensor,
1 remote control

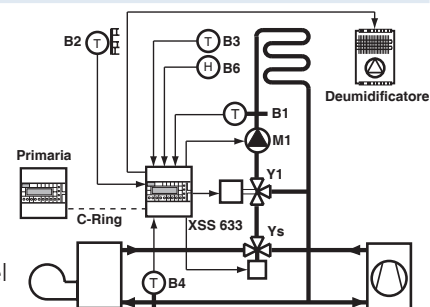

XSS 633 Summer/winter climate optimiser

RELATED PRODUCTS

ACB 400	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
SCH 010	Surface temperature sensor (0...100 °C)
SAB 010	Room temperature sensor (0...40 °C)
SAU 914	Relative humidity and temperature sensor
CDB 333	Remote control to change the program in use
ACD 655	Front panel mounting accessory

COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS C←RING


XSE 600*

OPTIMISER COMPENSATOR "SLAVE"
FOR HEATING PLANT ROOM

OPTIONAL REMOTE MONITORING

SLAVE UNIT FOR MULTICOSTER SYSTEM

Suitable for climatic optimisation of a central heating system and to control domestic hot water.

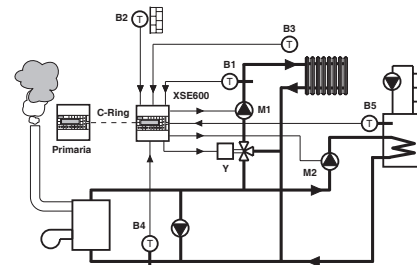

ESSENTIAL SENSORS: 1 outside temperature sensor
(as an alternative to outside temperature value on C-Ring),
1 flow sensor

OPTIONAL SENSORS AND ACCESSORIES: 1 room sensor, 1 sensor 1 remote

XSE 600 Optimiser compensator

RELATED PRODUCTS

ACB 400 Plug-in for communication via C-Bus

SAE 001 Outside temperature sensor (-40...40 °C)

SIH 010 Immersion temperature sensor (0...99 °C)

SCH 010 Surface temperature sensor (0...100 °C)

STF 001 Flue gas temperature sensor (0...500 °C)

SAB 010 Room temperature sensor (0...40 °C)

CDB 300 Remote control to change the program in use

ACD 655 Front panel mounting accessory

COMMUNICATION
PROTOCOLOPTIONAL
C←BUS C←RING

XSE 602*

OPTIMISER COMPENSATOR SLAVE FOR TWO CIRCUITS


OPTIONAL REMOTE MONITORING SYSTEM

Suitable for climatic optimisation of two central heating circuits.

ESSENTIAL SENSORS: 1 outside sensor (as an alternative
to the outside temperature value on C-Ring)

OPTIONAL SENSORS

AND ACCESSORIES: 1 or 2 room sensors,
1 anti-condensation sensor,
1 remote control

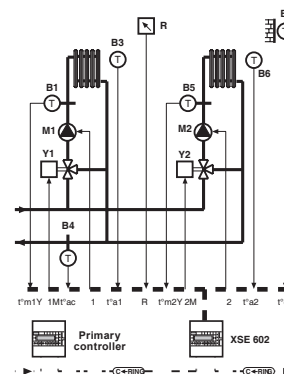

XSE 602 Optimiser compensator

RELATED PRODUCTS

ACB 400 Plug-in for communication via C-Bus

SAE 001 Outside temperature sensor (-40...40 °C)

SIH 010 Immersion temperature sensor (0...99 °C)

SCH 010 Surface temperature sensor (0...100 °C)

SAB 010 Room temperature sensor (0...40 °C)

CDB 300 Remote control to change the program in use

ACD 655 Front panel mounting accessory.

(*) In order to function, this unit needs to be connected to at least one C-RING master unit




COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS **C-RING**

XTT 618

CONTROLLER FOR DISTRICT HEATING SUBSTATION
WITH A SINGLE EXCHANGER
OPTIONAL REMOTE MONITORING

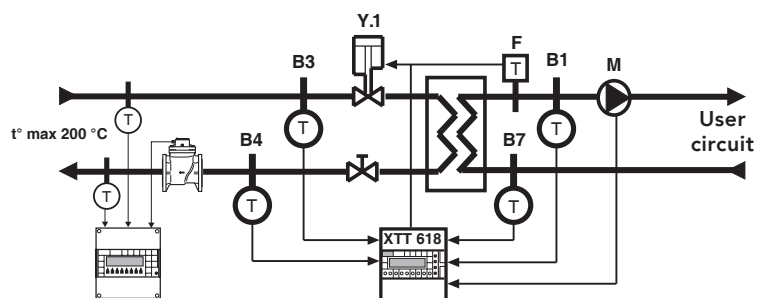

Regulation of district heating substations, consisting of an exchanger with a valve and a secondary circuit pump.

ESSENTIAL SENSORS: 1 secondary flow sensor

SENSORS AND ACCESSORIES 1 outside sensor

OPTIONAL: 1 primary flow sensor,
1 primary return sensor,
1 secondary return sensor

XTT 618	Controller for district heating sub-stations
XTT 618/S1	Controller for district heating sub-stations high temperature

RELATED PRODUCTS

ACB 400	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
SAF 010	Cable type temperature sensor (0...99 °C)
SHF 001	Cable type temperature sensor (0...180 °C)
STH 001	Immersion temperature sensor (0...300°C) primary flow and return (XTT 608), secondary flow (XTT 618/S1)
ACD 655	Front panel mounting accessory


COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS C←RING

XTT 608

CONTROLLER FOR DISTRICT HEATING SUBSTATION

WITH TWO EXCHANGERS FOR THE SYSTEM AND HOT WATER

OPTIONAL REMOTE MONITORING

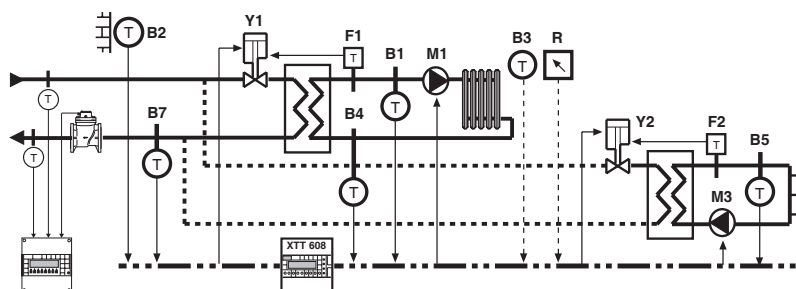

Regulation of district heating substations, consisting of two exchangers with valves and a secondary circuit pump.

ESSENTIAL SENSORS: 1 heating flow sensor,

1 DHW distribution sensor

SENSORS AND ACCESSORIES: 1 outside sensor, 1 room sensor, 1 primary return sensor,

OPTIONAL:

1 heating return sensor,

1 DHW distribution sensor, 1 remote control

XTT 608 Controller for district heating substations

RELATED PRODUCTS

ACB 460 Plug-in for communication via C-Bus

SAE 001 Outside temperature sensor (−40...40 °C)

SIH 010 Immersion temperature sensor (0...99 °C)
heating flow and return, hot water storage and distribution

SAB 010 Room temperature sensor (0...40 °C)

SHF 001 Cable type temperature sensor (0...180 °C)

CDB 300 Remote control to change the program in use

ACD 655 Front panel mounting accessory



COMMUNICATION
PROTOCOLS

C-BUS

DAM 675

UNIT OF 5 CONTROLS, WITH COMPLETE TIME PROGRAMMING AND
DISPLAY OF MEASUREMENTS, ALARMS AND STATUSES

5 On-Off controls with independent time programs and annual periods
7 measurement inputs or On-Off alarms
3 On-Off alarms

DAM 675 Programming unit for controls, measurements, alarms and statuses

RELATED PRODUCTS

STF 001	Flue gas temperature sensor (0...500 °C)
STH 001	Immersion temperature sensor (0...300 °C)
SIH 010	Immersion temperature sensor (0...99 °C)
SAE 001	Outside temperature sensor (-40...+40 °C)
SAB 010	Room temperature sensor (0...40 °C)
ASA 420	Accessory for connecting 4...20 mA active sensors
ASA 010	Accessory for connecting 0...10 V DC active sensors. It converts the 0...10 V signal of the sensors into an analogue signal
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS

PLE 608

UNIT FOR CONTROLS
WITH PROGRAMMABLE LOGIC
FUNCTIONS

6 On-Off controls with time schedule and logic functions (PLC).

PLE 608 6 On-Off controls with time schedule and logic functions

RELATED PRODUCTS

ACD 655 Front panel mounting accessory



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS

RS 232

XCO 428

PIME PROGRAMMER WITH TWO OUTPUTS
AND TWO ALARMS PRESET FOR SMS

XCO 428 is a universal time programmer with 2 outputs, complete with alarms, already preset to be controlled via SMS.

A kit with a GSM modem is also provided, to obtain a complete mini remote control.

XCO 428 Time programmer with two outputs and two alarms

RELATED PRODUCTS


ACB 400 Plug-in for communication via C-Bus

COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS

C←RING

XPT 678

ROOM TEMPERATURE CONTROLLER
AND OPTIMISER FOR 5 USER
CIRCUITS USER AND BOILER

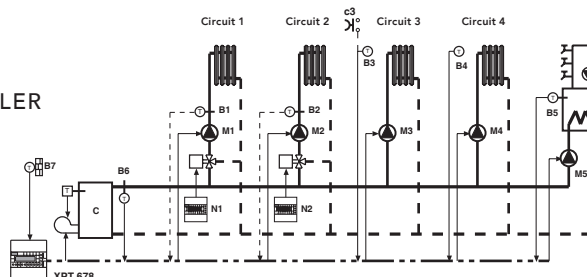

On-Off control for thermal system with time programming and/or room temperature control. Boiler control according to system request.

XPT 678 Temperature controller for user circuits and boiler

RELATED PRODUCTS

ACB 460	Plug-in for communication via C-Bus
SIH 010	Immersion temperature sensor (0...99 °C)
SAE 001	Outside temperature sensor (-40...+40 °C)
SAB 010	Room temperature sensor (0...+40 °C)
ACD 655	Front panel mounting accessory

COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS

IPG 318

TWIN PUMP STEP CONTROLLER

Adapts the pump control On-Off signal of a controller to the control of twin pumps.

IPG 318 Twin pump step controller


COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS

XPG 658

SEQUENCE CONTROLLER
OF 5 PUMP OR
OF 5 ELECTRICAL LOADS

It controls up to 5 pumps in sequence according to an On-Off control signal, or a 0...10 V DC signal.

It can also be used as a sequence controller of 5 electrical loads.



XPG 658 Sequence controller of up to 5 pumps or electrical loads

RELATED PRODUCTS

ACB 460	Plug-in for communication via C-Bus
ACD 655	Front panel mounting accessory



IPS 328

DOUBLE UNIVERSAL

RELAY CONTROL CONVERTER

Transforms any 2 On-Off controls into 2 relay controls.
It controls the recirculation pump for condensing boilers to optimise efficiency.
It controls the circulation pump with variable speed in systems with boxes.

IPS 328 Double universal relay control converter



CSA 344

TRIPLE SIGNAL SELECTOR

0...10 V DC

Selects the minimum, arithmetic mean and maximum value between 2...6 signals 0...10 V DC.

CSA 344 Triple signal selector 0...10 V DC



COMMUNICATION
PROTOCOLS

C-BUS

DRP 414

CONTROLLER FOR CIRCULATION PUMPS

WITH VARIABLE SPEED OR FIXED SPEED

Controls the flow rate of the circulation pump in a system to optimise efficiency of the condensing boilers.

- one or two variable speed pumps
 - one fixed-speed pump plus one variable-speed pump
 - two fixed speed pumps
- 24 V AC controller power supply, such as pump head sensors to be used.

DRP 414 Circulation pump controller

RELATED PRODUCTS

		Measurement Range
SDW 201	Liquid differential pressure sensor	0 ... 1 bar
SDW 202	Liquid differential pressure sensor	0 ... 25 bar
SDW 206	Liquid differential pressure sensor	0 ... 6 bar



COMMUNICATION
PROTOCOLS

C-RING

OCR 348

INSERTS VARIOUS COMMANDS

INTO THE C-RING BUS

Inserts some external inputs into the C-Ring line to be able to control the temperature of a boiler or similar.

- 1 temperature measured by a standard sensor
- 1 input 0...10 V DC adjustable
- 1 general use switch

OCR 348 Inserter for C-Ring of various controls: 230 V DC power supply

COMMUNICATION
PROTOCOLS

C←RING

LCR 348

CONVERTER FOR C-RING: CONVERSION OF C-RING
DATA TO RELAYS AND 0...10 V DC

Reader and converter of signals in the C-Ring

- reads the maximum temperature requested by the equipment connected in C-Ring
- converts this temperature into a 0...10 V DC signal to be sent to boilers with this input
- relay output when this temperature exceeds a certain value
- relay output for C-ring failure alarm

LCR 348

Auxiliary unit for C-Ring

COMMUNICATION
PROTOCOLS

C←BUS

CSV 328

CONVERTER FROM 0..10 V DC, 4...20mA
OR TEMPERATURE SIGNALS TO 2 MODULATING RELAY CONTROLS
2 STAGES ON-OFF, MINIMUM AND MAXIMUM LIMITS

Converts a 0...10 Volt DC, or 4...20 mA signal into 2 relays controls to have:

- 3-point modulating control, to convert a 3-point actuator into a 0...10 V DC input
- 2-stage On-Off control to control e.g. 2 boilers in sequence
- 2 minimum and maximum limits On-Off controls

CSV 328

Converter of 0...10 V DC, 4...20 mA, or temperature signature

RELATED PRODUCTS

SAE 001 Outside temperature sensor (-40...40 °C)

SIH 010 Immersion temperature sensor (0...99 °C)

SAF 010 Cable type temperature sensor (0...99 °C)

SHF 001 Cable type temperature sensor (0...180 °C)

STH 001 Immersion temperature sensor (0...300°C)
primary flow and return (XTT 608),
secondary flow (XTT 618/S1)

COMMUNICATION
PROTOCOLS

C←BUS

CSC 328

CONVERTER FROM 3 POINTS 0...10 V DC,
OR 4...20 mA TO TWO FREELY CONFIGURABLE
0...10 V DC SIGNALS

Converts a 3-point signal (e.g.: the 2 open and close relays of a controller), a 0...10 Volt or 4...20 mA output, into 2 0...10 Volt outputs, which can be freely programmed to control the sequence of 2 units (e.g.: boilers) which have 0...10 V DC as input

CSC 328

Auxiliary unit for C-Ring



CAP 328

CONVERTER AND AMPLIFIER OF ACTIVE AND PASSIVE TEMPERATURE SENSORS

Converts the temperature measurement of a standard NTC passive sensor, or a 0...10 Volt DC or 4...20mA active temperature sensor into 2 outputs compatible with the temperature sensor inputs of the various COSTER GROUP devices. It amplifies the 2 compatible outputs to be able to power up to a maximum of 35 devices, all with the same input characteristics.

TYPE OF TEMPERATURE SENSOR

GROUPS OF EQUIPMENT WITH IDENTICAL MEASUREMENT CHARACTERISTICS

NTC 1	Outside Kohm (−30...40 °C)	check the CAP 328 data sheet
NTC 10	Room Kohm (0...40 °C)	
NTC 10	Kohm flow air (0...60 °C)	
NTC 10	Kohm water (0...100 °C)	

CAP 328 Converter/amplifier for temperature sensors



RTP 318

ON-OFF OR DIFFERENTIAL TEMPERATURE CONTROLLER

Suitable for temperature control at a fixed point or to control the difference between 2 temperatures: Output = 1-stage On-Off control
ESSENTIAL SENSORS: 1 sensor for fixed point or 2 sensors per temperature difference.

RTP 318 On/Off or differential temperature controller

RELATED PRODUCTS

SIH 010	Immersion temperature sensor (0...+99 °C)
SAE 001	Outside temperature sensor (−40...+40 °C)
SAB 010	Room temperature sensor (0...+40 °C)
SCH 010	Surface temperature sensor (0...+99 °C)
STA 010	Air duct temperature sensor (0...+99 °C)
SAF 010	Cable type temperature sensor (0...+99 °C)
SAF 001	Cable type temperature sensor (−40...+40 °C)

COMMUNICATION
PROTOCOLS

C-BUS

DDM 328

DIFFERENTIAL CONTROLLER
OF 2 TEMPERATURES
OR 2 SIGNALS 0...10 V DC

Control with 2 relay output and 0...10 V DC, of the difference of two temperatures or 2 values 0...10 V DC, with the following function:

- modulating
- 2-stage
- minimum and maximum limit

DDM 328 On-Off temperature controller

RELATED PRODUCTS

SIH 010	Immersion temperature sensor (0...+99 °C)
SAB 010	Room temperature sensor (0...+40 °C)
STA 010	Air duct temperature sensor (0...+99 °C)
SUR 704	Air duct relative humidity sensor (10...90%)
SUT 734	Air duct humidity sensor for swimming pools (10...90%)
SAU 914	Relative humidity (10...90%) and temperature sensor (0...40 °C)

COMMUNICATION
PROTOCOLS

C-BUS

DTF 31.

TEMPERATURE CONTROLLER
FOR VARIOUS USES

WITH C-BUS REMOTE MONITORING

It can be used for any temperature control needs, with following outputs:

- 3-point modulating with 2 relays
- On-Off with 1 or 2 stages
- On-Off proportional with 1-stage

ESSENTIAL SENSORS: 1 temperature sensor

OPTIONAL SENSORS

AND ACCESSORIES: 1 limit temperature sensor, 1 Temperature set point adjuster

DTF 314	Controller with C-Bus remote control, 24 V AC power supply
DTF 318	Controller with C-Bus remote control, 230 V AC power supply

RELATED PRODUCTS

SIH 010	Immersion temperature sensor (0...+99 °C)
SIR 010	Immersion (quick) water temperature sensor (0...+99 °C)
SAB 010	Room temperature sensor (0...+40 °C)
STA 010	Air duct temperature sensor (0...+99 °C)
CDB 100	Temperature Set point adjuster with incorporated sensor (-5...+5 °C)



RTF 31.

TEMPERATURE CONTROLLER FOR VARIOUS USES
WITHOUT C-BUS REMOTE MONITORING

It can be used for any temperature adjustment requirement with following outputs:

- 3-point modulating with 2 relays
- On-Off with 1 or 2 stages
- On-Off proportional with 1-stage

ESSENTIAL SENSORS: 1 temperature sensor

OPTIONAL SENSORS

AND ACCESSORIES: 1 limit temperature sensor, 1 temperature set point adjuster

RTF 314	Controller with C-Bus remote control, 24 V AC power supply
RTF 318	Controller with C-Bus remote control, 230 V AC power supply

RELATED PRODUCTS

SIH 010	Immersion temperature sensor (0...+99 °C)
SIR 010	Immersion (quick) water temperature sensor (0...+99 °C)
SAB 010	Room temperature sensor (0...+40 °C)
STA 010	Air duct temperature sensor (0...+99 °C)
CDB 100	Temperature Set point adjuster with incorporated sensor (-5...+5 °C)



COMMUNICATION
PROTOCOLS



XTR 628

TEMPERATURE CONTROLLER

WITH TIME SCHEDULE

There are 3 controllers in the same unit with these functions:

- 1 modulating 3-point or 1- or 2-stage On-Off temperature controller with own time schedule
- 2 On-Off temperature controllers with own time schedules

ESSENTIAL SENSORS: 1, 2 or 3 temperature sensors

OPTIONAL SENSORS AND ACCESSORIES: 1 flow temperature sensor, 1 temperature set point adjuster

XTR 628	Temperature controller with time schedule
----------------	---

RELATED PRODUCTS

ACB 460	Plug-in for communication via C-Bus
SIH 010	Immersion temperature sensor (0...+99 °C)
SIR 010	Immersion (quick) water temperature sensor (0...+99 °C)
SAB 010	Room temperature sensor (0...+40 °C)
STA 010	Air duct temperature sensor (0...+99 °C)
CDB 100	Temperature Set point adjuster with incorporated sensor (-5...+5 °C)
ACD 655	Front panel mounting accessory

COMMUNICATION
PROTOCOLS

C←BUS

DRU 61.

UNIVERSAL CONTROLLER WITH RELAY OUTPUT

It controls temperature or other physical variables such as pressure, level, etc.

- passive temperature sensor input or 0...10 V DC or 4...20 mA, from other active sensors.
- outputs: 3-point modulating control or 2...4 step sequencing.

ESSENTIAL SENSORS: 1 passive or active sensor

OPTIONAL SENSORS AND ACCESSORIES: 1 temperature set point adjuster

DRU 614	Universal controller, 24 V AC power supply
DRU 618	Universal controller, 230 V AC power supply

RELATED PRODUCTS

SIH 010	Immersion temperature sensor (Normal) (0...99 °C)
SAF 001	Cable type temperature sensor (-40...40 °C)
STH 001	Immersion temperature sensor (0...300 °C)
SAB 010	Room temperature sensor (0...40 °C)
SUR 704	Relative humidity sensor (10...90 %)
SUT 734	Air duct humidity sensor for swimming pools (10...90%)
SAU 914	Relative humidity (10...90%) and temperature sensor (0...40 °C)
SPW 204	Pressure sensor for liquids (0...4 bar)
SPW 210	Pressure sensor for liquids (0...10 bar)
SPW 216	Pressure sensor for liquids (0...16 bar)
SDW 201	Differential pressure sensor for liquids (0...1 bar)
SDW 202	Differential pressure sensor for liquids (0...2,5 bar)
SDW 206	Differential pressure sensor for liquids (0...6 bar)
SDA 700	Differential pressure sensor for air (0...26 mbar settable)
CDB 100	Temperature Set point adjuster with incorporated sensor (-5...5 °C)
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS

C-BUS

DRU 41.

UNIVERSAL CONTROLLER WITH

WITH RELAY OUTPUT 0...10 V DC

It controls temperature or other physical properties such as pressure, level, etc.

- passive temperature sensor input or 0...10 Volt DC, from other active sensors
- outputs: 3-point modulating command, 2-stage On-Off or 0...10 Volt dc.

ESSENTIAL SENSORS: 1 passive or active sensor

OPTIONAL SENSORS AND ACCESSORIES: 1 temperature set point adjuster

DRU 414	Universal controller, 24 V AC power supply
DRU 418	Universal controller, 230 V AC power supply

RELATED PRODUCTS

SIH 010	Immersion temperature sensor (Normal) (0...99 °C)
SAB 010	Room temperature sensor (0...40 °C)
SUR 704	Relative humidity sensor (10...90 %)
SUT 734	Air duct humidity sensor for swimming pools (10...90%)
SAU 914	Relative humidity (10...90%) and temperature sensor (0...40 °C)
SPW 204	Pressure sensor for liquids (0...4 bar)
SPW 210	Pressure sensor for liquids (0...10 bar)
SPW 216	Pressure sensor for liquids (0...10 bar)
SDW 201	Differential pressure sensor for liquids (0...1 bar)
SDW 202	Differential pressure sensor for liquids (0...2,5 bar)
SDW 206	Differential pressure sensor for liquids (0...6 bar)
SDA 700	Differential pressure sensor for air (0...26 mbar adjustable)
CDB 100	Temperature Set point adjuster with incorporated sensor (-5...5 °C)



COMMUNICATION
PROTOCOLS

C-BUS

C-RING

DPS 638

CONTROLLER FOR SOLAR PANELS INSTALLATIONS WITH

C-BUS REMOTE MONITORING

Automation of solar panel systems with up to 3 storage tanks

- On-Off setting of the thermal integration circuit
- Modulating control of the domestic hot water distribution temperature

ESSENTIAL SENSORS: 1 passive or active sensor

OPTIONAL SENSORS AND ACCESSORIES: 1 temperature set point adjuster

DPS 638	Controller for solar panels with remote monitoring
----------------	--

RELATED PRODUCTS

SIH 010	Immersion temperature sensor with brass thermowell (0...99 °C)
SAF 010	Cable type temperature sensor (0...99 °C)
SHF 001	Cable type temperature sensor with 3 metre cable (0...180 °C)
GIS 090	Cable type sensor pocket (1/2" x 80 mm)
GIS 160	Cable type sensor pocket (1/2" x 160 mm)
GIS 500	Cable type sensor pocket (1/2" x 500 mm)
ACD 655	Front panel mounting accessory

COMMUNICATION
PROTOCOLSOPTIONAL
C←BUS

XTU 618

TEMPERATURE AND HUMIDITY CONTROLLER
FOR FAN COILS

OPTIONAL REMOTE MONITORING


Suitable for winter and summer control of room temperature and humidity and/or delivery air in thermoventilation (fan coils) systems consisting of:

- 1 heating/cooling battery
- 1 humidifier

ESSENTIAL SENSOR: 1 room or Air duct temperature sensor

OPTIONAL SENSORS AND ACCESSORIES:

- 1 flow temperature sensor
- 1 outside sensor
- 1 room/Air duct relative humidity sensor
- 1 battery frost protection sensor
- 1 temperature Set point adjuster
- 1 remote control

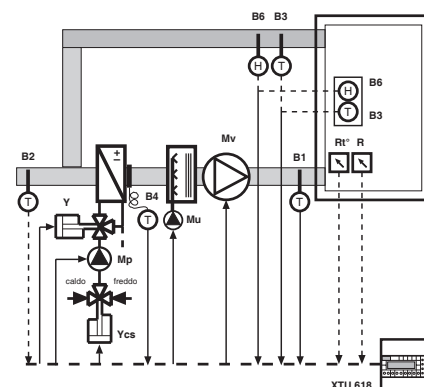

XTU 618 Temperature and relative humidity controller

RELATED PRODUCTS

ACB 460	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (−40...40)
STA 010	Air duct temperature sensor (intake, flow, condensation) (0...60 °C)
SAB 010	Room temperature sensor (0..40 °C)
STA 001	Air duct temperature sensor (external (−40...40 °C)
SAF 010	Cable type temperature sensor (antifreeze) (0...40 °C)
SUR 704	Air duct relative humidity sensor
SAU 914	Relative humidity (10...90%) and temperature sensor (0...50 °C)
CDB 100	Temperature Set point adjuster with incorporated sensor (−5...5 °C)
CDB 333	Remote control for modifying the current program
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS

PREDISPOSTO


C-BUS

XTA 624

TEMPERATURE CONTROLLER FOR
AIR HANDLING UNIT WITH 2 BATTERIES
OPTIONAL REMOTE CONTROL

Suitable for ambient and/or air flow temperature control in Air Handling Units consisting of:

- 1 or 2 heating and/or cooling batteries
- 1 air mixing unit (dampers) or 1 heat recovery unit

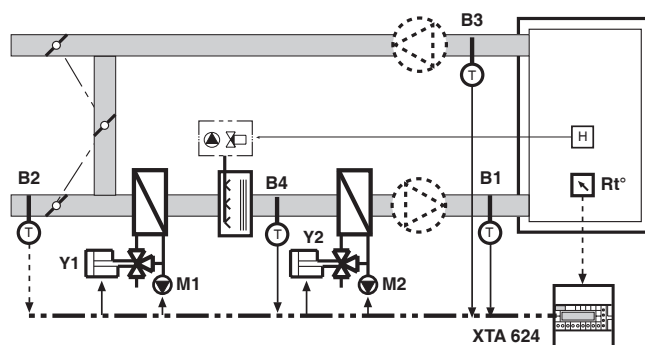

ESSENTIAL SENSOR: 1 room or air duct temperature sensor
OPTIONAL SENSORS: 1 flow sensor,
AND ACCESSORIES 1 outside sensor,
1 preheating sensor
1 temperature set point adjuster

XTA 624	Programming unit for commands, measurements, alarms and statuses
----------------	--

RELATED PRODUCTS

ACB 400	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40)
STA 001	Air duct temperature sensor (external)(-40...40 °C)
STA 010	Air duct temperature sensor (intake, flow, condensation (0...60 °C)
SAB 010	Room temperature sensor (0..40 °C)
CDB 100	Temperature Set point adjuster with incorporated sensor (-5...5 °C)
ACD 655	Front panel mounting accessory

COMMUNICATION
PROTOCOLSOPTIONAL
C-BUS

XTU 614


TEMPERATURE AND HUMIDITY CONTROLLER

FOR AIR HANDLING UNIT WITH 1 BATTERY

OPTIONAL REMOTE MONITORING

Suitable for winter and summer control of room temperature and humidity and/or flow air in air handling systems consisting of :

- 1 heating and/or cooling or preheating battery
- 1 On-Off humidification unit
- 1 air mixing unit (dampers) or 1 heat recovery unit
- 1 heat recuperator

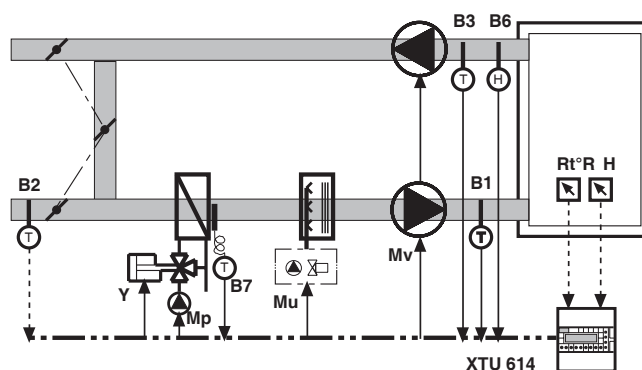

ESSENTIAL SENSOR:	1 room or air duct temperature sensor
OPTIONAL SENSORS	1 flow or pre-heating sensor
AND ACCESSORIES:	1 outside sensor
	1 room/Air duct relative humidity sensor
	1 battery frost protection sensor
	1 temperature set point adjuster
	1 humidity set point adjuster

XTU 614 Temperature and relative humidity controller

RELATED PRODUCTS

ACB 460	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (-40...40)
STA 010	Air duct temperature sensor (intake, flow, condensation) (0...60 °C)
SAB 010	Room temperature sensor (0...40 °C)
STA 001	Air duct temperature sensor (external) (-40...40 °C)
SAF 010	Cable type temperature sensor (antifreeze) (0...40 °C)
SUR 704	Air duct relative humidity sensor
SUT 734	Air duct humidity and temperature sensor (for swimming pools) (10...90%)
SAU 914	Relative humidity (10...90%) and temperature sensor (0...50 °C)
CDB 100	Temperature Set point adjuster with incorporated sensor (-5... 5 °C)
CDB 200	Relative humidity set point adjuster
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS

XTU 644

TEMPERATURE AND HUMIDITY CONTROLLER

FOR AIR HANDLING UNIT

WITH 2 BATTERIES


OPTIONAL REMOTE MONITORING

Suitable for winter and summer control of room temperature and humidity and/or flow air in air handling systems consisting of:

- 2 heating and/or cooling or preheating batteries
- 1 On-Off humidification unit
- 1 air mixing unit (dampers) or 1 heat recuperator

ESSENTIAL SENSOR: 1 room or air duct temperature sensor


OPTIONAL SENSORS AND ACCESSORIES: 1 flow temperature sensor
1 outside sensor
1 air duct ambient relative humidity sensor
1 outside relative humidity sensor
1 window sensor, 1 temperature set point adjuster
1 relative humidity set point adjuster

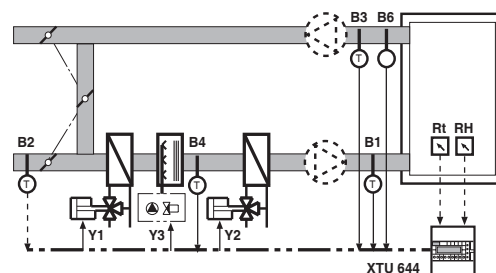

XTU 644 Temperature and relative humidity controller

RELATED PRODUCTS

ACB 460	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (−40...40)
STA 010	Air duct temperature sensor (intake, flow, condensation) (0...60 °C)
SAB 010	Room temperature sensor (0...40 °C)
STA 001	Air duct temperature sensor (external) (−40...40 °C)
SUR 704	Air duct relative humidity sensor
SUT 734	Air duct humidity and temperature sensor (for swimming pools) (10...90%)
SAU 914	Relative humidity (10...90%) and temperature sensor (0...50 °C) (0...50 °C)
CDB 100	Temperature Set point adjuster with incorporated sensor (−5...5 °C)
CDB 200	Relative humidity set point adjuster
ACD 655	Front panel mounting accessory

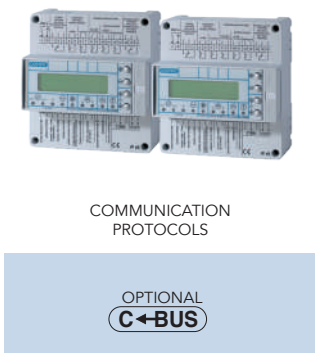

XTU 614/644


TEMPERATURE AND HUMIDITY CONTROLLER

FOR AIR HANDLING UNIT WITH 3 BATTERIES

OPTIONAL REMOTE MONITORING

These are 2 coupled standard 3-battery controllers for Air Handling Unit, consisting of:

- 3 heating/pre-heating, cooling and post-heating batteries
- 1 On-Off humidification unit or 1 heat recovery unit in a single package

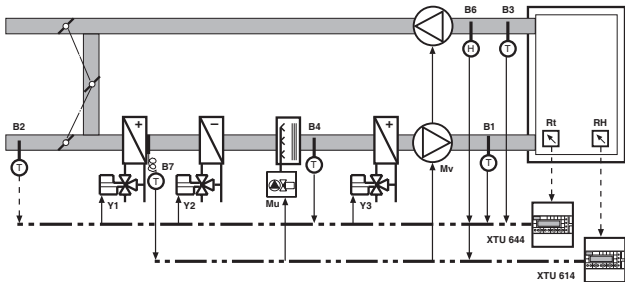

ESSENTIAL SENSORS: see
 XTU 614 and XTU 644 controllers

SENSORS AND ACCESSORIES: see
 XTU 614 and XTU 644 controllers

XTU 614/644 Pair of controllers for Air Handling Unit (single package)

RELATED PRODUCTS

ACB 460	Plug-in for communication via C-Bus
ACD 655	Front panel mounting accessory



COMMUNICATION
PROTOCOLS

OPTIONAL
C-BUS

XTU 664

TEMPERATURE AND HUMIDITY CONTROLLER

FOR AIR HANDLING UNIT


WITH 2 BATTERIES WITH TIME PROGRAMMING

OPTIONAL REMOTE MONITORING

Suitable for adjustment the ambient and/or air flow temperature in Air Handling Units consisting of:

- 1 or 2 heating and/or cooling batteries
- 1 modulating or On-Off humidification unit
- 1 air mixing unit (dampers) or 1 heat recovery unit
- 1 ventilation unit

IT IS A UNIT SIMILAR TO XTU 644, BUT WITH FULL TIME PROGRAMMING.

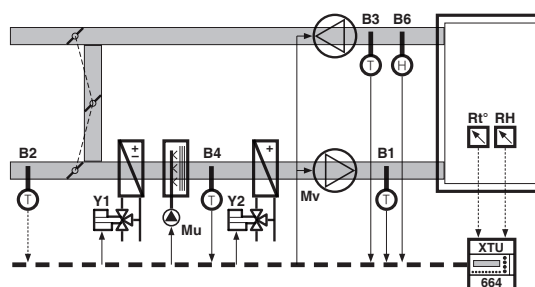

ESSENTIAL SENSORS: 1 room or Air duct temperature sensor

OPTIONAL SENSORS AND ACCESSORIES:

- 1 temperature sensor
- 1 pre-heating sensor, 1 outside sensor
- 1 room/Air duct relative humidity sensor
- 1 outside relative humidity sensor
- 1 window sensor, 1 temperature variator
- 1 relative humidity variator

XTU 664 Temperature and relative humidity controller

RELATED PRODUCTS

ACB 460	Plug-in for communication via C-Bus
SAE 001	Outside temperature sensor (−40...40)
STA 010	Air duct temperature sensor (intake, flow, condensation) (0...60 °C)
SAB 010	Room temperature sensor (0..40 °C)
STA 001	Air duct temperature sensor (external) (−40...40 °C)
SUR 704	Air duct relative humidity sensor
SUT 734	Air duct humidity and temperature sensor (for swimming pools) (10...90%)
SAU 914	Relative humidity (10...90%) and temperature sensor (0...50 °C) (0...50 °C)
CDB 100	Temperature Set point adjuster with incorporated sensor (−5...5 °C)
CDB 200	Relative humidity set point adjuster




RQA 410

AIR QUALITY CONTROLLER

Adjusts the percentage of outside air introduced into the room according to the air quality measured by 1 or more sensors.

CANNOT BE USED FOR FIRE PROTECTION SYSTEMS, GAS LEAK DETECTION OR SIMILAR

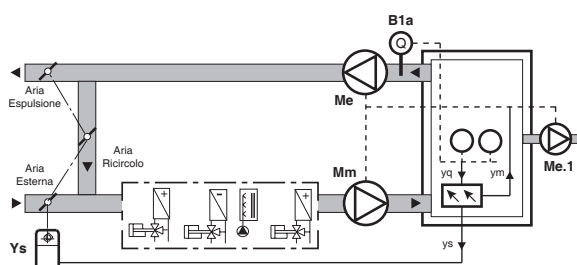

ESSENTIAL SENSOR: 1 or more sensors
room or air duct quality sensor

RQA 410 Room air quality controller

RELATED PRODUCTS

SQC 954 Room air quality sensor

SQS 954 Air quality for air duct

NOTES



ROOM CONTROL

COMMUNICATION PROTOCOLS



BACnet



Modbus

Room control system



COMMUNICATION
PROTOCOLS



ZRC 658

BACNET MS/TP ROOM CONTROL AUTOMATION CONTROLLER

Programmable using CosterCAD application.
Download the application and firmware locally via USB port and
remotely via BACnet protocol. Communication ports:

- 1 RS 485 for BACnet MS/TP communication
- 1 RS 485 for user interface and/or expander communication.

230 V AC power supply.
6 module DIN enclosure.

AVAILABLE FROM JUNE 2025.

INPUT/OUTPUT

UI ⁽¹⁾	AO	DO
3	3	5

RELATED PRODUCTS

USB 011 USB/RJ11 cable for debug ZBC 862 € 160,00



COMMUNICATION
PROTOCOLS



PRU 002

USER INTERFACE FOR ROOM CONTROL


Colour display with temperature, relative humidity and CO₂ measurement.
Intuitive operation with navigation system for thermo-hygrometric control, blinds and light
management.

24 V AC power supply.
AVAILABLE FROM JUNE 2025.

⁽¹⁾ The universal inputs may be: analogue,
digital or resistive sensors

System architecture for room control

Building Management System (BMS) that provides for the control of all components of HVAC-R systems (air handling unit, fan coil, heating and cooling unit). Interaction between the various devices helps to reduce consumption and the comprehensive management of the building/system.

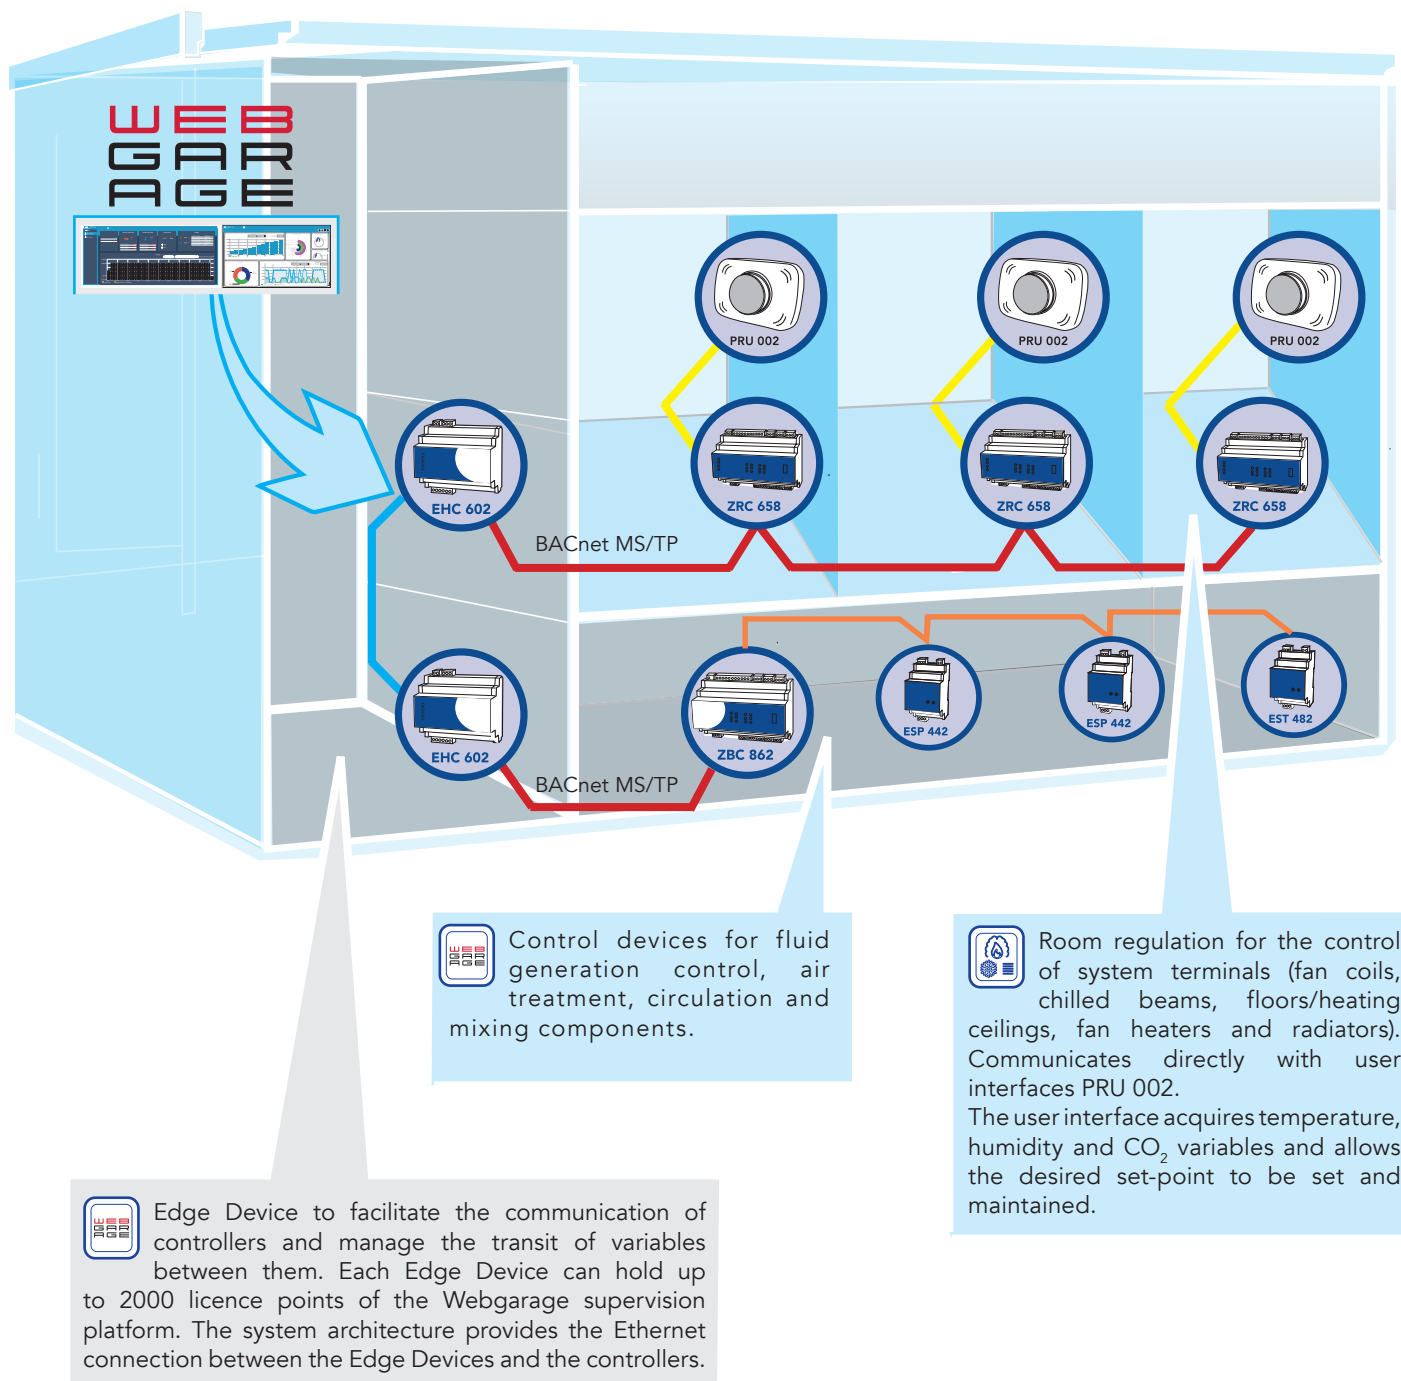

"MULTIZONE" room temperature control and distribution system



COMMUNICATION
PROTOCOLS



MRL 608

CENTRAL CONTROL UNIT

DISPLAY AND MANAGEMENT

Communication master with peripheral units.

MRL 608 System central control unit

RELATED PRODUCTS


ACB 400 Plug-in for communication via C-Bus

ACD 655 Front panel mounting accessory

ALD 018 Auxiliary power supply for 50 zones
(25 with RTL 120 - 520 room controller)



COMMUNICATION
PROTOCOLS



RTL 110


LOCAL (SLAVE) UNIT WITH RELAY OUTPUT,
FLUSH MOUNTING

Room temperature controller via an On-Off switch.

RTL 110 Flush-mounting room controller with relay output



COMMUNICATION
PROTOCOLS



RTL 510

LOCAL (SLAVE) UNIT WITH RELAY OUTPUT,
WALL MOUNTING

Wall-mounting room controller with relay output, colour white.

RTL 510 Wall-mounting room controller with relay output

COMMUNICATION
PROTOCOLS**P←LOC**

RTL 120

LOCAL (SLAVE) UNIT WITH RELAY OUTPUT,
AND 0...10V DC,
FLUSH MOUNTING

Flush-mounting room controller with relay output or 0...10 V DC..

RTL 120 Flush-mounting room controller with relay output or 0...10 V DC

COMMUNICATION
PROTOCOLS**P←LOC**

RTL 520

LOCAL (SLAVE) UNIT WITH RELAY OUTPUT,
AND 0...10V DC,
WALL MOUNTING

Wall-mounting room controller with relay output or 0...10 V DC.
White colour.

RTL 520 Wall-mounting room controller with relay output or 0...10 V DC

COMMUNICATION
PROTOCOLS**P←LOC**

RTL 111

FLUSH-MOUNTED ROOM CONTROLLER FOR 2 PIPE FAN COILS
WITH EXPANSION UNIT DEP 658

Room temperature controller via:

- fan coil with On-Off valve and fan with up to 3 speeds
- fan coil with modulating valve and fan up to 3 speeds
- single battery air handling unit and fan.

RTL 111 Flush-mounting room controller for expansion units

EXPANDER

DEP 658 Output expander for RTL 111 - 511 room controllers

COMMUNICATION
PROTOCOLS**P←LOC**

RTL 511

FLUSH-MOUNTED ROOM CONTROLLER FOR 2 PIPE FAN COILS
WITH EXPANSION UNIT DEP 658

Room temperature controller via:

- fan coil with On-Off valve and fan with up to 3 speeds
- fan coil with modulating valve and fan up to 3 speeds
- single battery air handling unit and fan.

RTL 511 Flush-mounting room controller for expansion units

EXPANDER

DEP 658 Output expander for RTL 111 - 511 room controllers



COMMUNICATION
PROTOCOLS

P←LOC

DEP 658

OUTPUT EXPANSION UNIT FOR RTL 111-511

Output expander for RTL 111 - 511 room controllers RTL 111 - 511

DEP 658 Output expansion unit for RTL 111 - 511

RELATED PRODUCTS

ALD 110 Accessory to control up to 10 DEP 658 with a single RTL 111-511

ACD 655 Front panel mounting accessory



COMMUNICATION
PROTOCOLS

PREDISPOSTO

C←BUS

P←LOC

UPM 678

CONTROL UNIT FOR PUMPS, BURNERS, CHILLERS OR OTHER EQUIPMENT

Control unit for pumps, burners, chillers or other equipment according to the thermal and/or cooling load of the zones

UPM 678 Control units for pumps or other equipment, MULTIZONE system

RELATED PRODUCTS

ACB 400 Plug-in for communication via C-Bus

ACD 655 Front panel mounting accessory



COMMUNICATION
PROTOCOLS

P←LOC

RTL 141

FLUSH-MOUNTED ROOM CONTROLLER FOR 4-PIPE FAN COIL WITH EXPANSION UNIT

Room temperature controller via:


- fan coil with On-Off valve and fan with up to 3 speeds
- fan coil with modulating valve and fan up to 3 speeds
- air handling unit with 2 batteries and fan

RTL 141 Flush-mounting room controller for expansion units

EXPANDERS

DEP 648 Output expander for RTL 141 - 541 room controllers

DEP 678 Output expander for RTL 141 - 541 room controllers

COMMUNICATION
PROTOCOLS


RTL 541

WALL-MOUNTED ROOM CONTROLLER
FOR 4-PIPE FAN COIL
WITH EXPANSION UNIT

Wall-mounting room controller for expansion units.

Colour white

Room temperature controller via:


- fan coil with On-Off valve and fan with up to 3 speeds
- fan coil with modulating valve and fan up to 3 speeds
- air handling unit with 2 batteries and fan

RTL 541 Wall-mounting room controller for expansion units

EXPANDERS

DEP 648 Output expander for RTL 141 - 541 room controllers

DEP 678 Output expander for RTL 141 - 541 room controllers

COMMUNICATION
PROTOCOLS


DEP 648

EXPANSION UNIT WITH:

- 1 ANALOGUE INPUT
- 4 TRIAC OUTPUTS,
- 3 INTELOCKED RELAY OUTPUTS

Output expander for RTL 141 - 541

With triac outputs for heating and cooling actuators and relay outputs for On-Off fan with 1 to 3 speeds

DEP 648 Output expander for RTL 141 - 541 room controllers

ACD 655 Front panel mounting accessory

COMMUNICATION
PROTOCOLS


DEP 678

EXPANSION UNIT WITH:

- 1 ANALOGUE INPUT
- 4 TRIAC OUTPUTS
- 3 INTELOCKED RELAY OUTPUTS

Output expander for RTL 141 - 541

With relay outputs for heating, cooling and On-Off fan with 1 to 3 speeds

DEP 678 Output expander for RTL 141 - 541 room controllers

ACD 655 Front panel mounting accessory



COMMUNICATION
PROTOCOLS



JOY ...

ROOM CONTROL

Multi-purpose room with power supply 230 V AC.
The module is provided with an RS 485 port that makes communication possible through the Modbus protocol.

MODELS

JOY 879W	Hot/cold unit for 6-way valves with two relay outputs, one 0-10Vdc EC output ModBus RS485 port, white
JOY 771W	Hot/cold units for fan coils with 5 relay outputs (2 for on/off valve control, 3 for 3-speed fan control), ModBus port, white
JOY 363W	Hot/cold room unit for 2-pipe or 4-pipe fan coils with two relay outputs for on/off valve control, one 0-10 V DC EC output for modulating fan control, ModBus port, white

Note: Black version available upon request



COMMUNICATION
PROTOCOLS



LCF ...

ROOM CONTROL

Multi-purpose room with power supply 24 V AC.
The module is provided with an RS 485 port that makes communication possible through the Modbus protocol.

MODELS

LCF 363W	Hot/cold unit for 2- or 4-pipe fan coils with 3 analogue outputs 0...10 V DC (EC fan, heating valve and cooling valve), 2 digital outputs for E/I switching, ModBus port, white
LCF 364W	Hot/cold unit for 2- or 4-pipe fan coils with 2 analogue outputs 0...10 V DC (heating and cooling) and 3 relay outputs for controlling a 3-stage fan, ModBus port, white
LCF 771W	Hot/cold unit for fan coils with 5 relay outputs (2 for On-Off valve control, 3 for 3-speed fan control), ModBus port, white



WTD 911

WEEKLY DIGITAL CHRONOTHERMOSTAT

Weekly digital chronothermostat for controlling the room temperature on three levels (Comfort - Reduced - Off/Frost protection).
On-Off control, for activating loads (e.g. boilers, heat pumps, valves, circulators, etc.) in heating/cooling systems for homes or offices.

WTD 911 Weekly digital chronothermostat



WTW 900

WIRELESS DIGITAL WEEKLY CHRONOTHERMOSTAT

It consists of:


WTB 900 Battery-powered wireless-controlled weekly chronothermostat for room temperature control on three levels: Comfort, Reduced or Off/Frost protection.

WTR 900 One-channel wireless concentrator with On-Off control, for activating loads (e.g. boilers, heat pumps, valves, circulators, etc.) in heating/cooling systems for homes or offices.

WTW 900 Weekly digital wireless chronothermostat

System architecture

Mixed system architecture with proprietary C-Bus protocol devices and Modbus protocol controllers interacting with each other via Edge Device and Webgarage supervision. EHC 602 also captures variables to and from room terminal controllers.

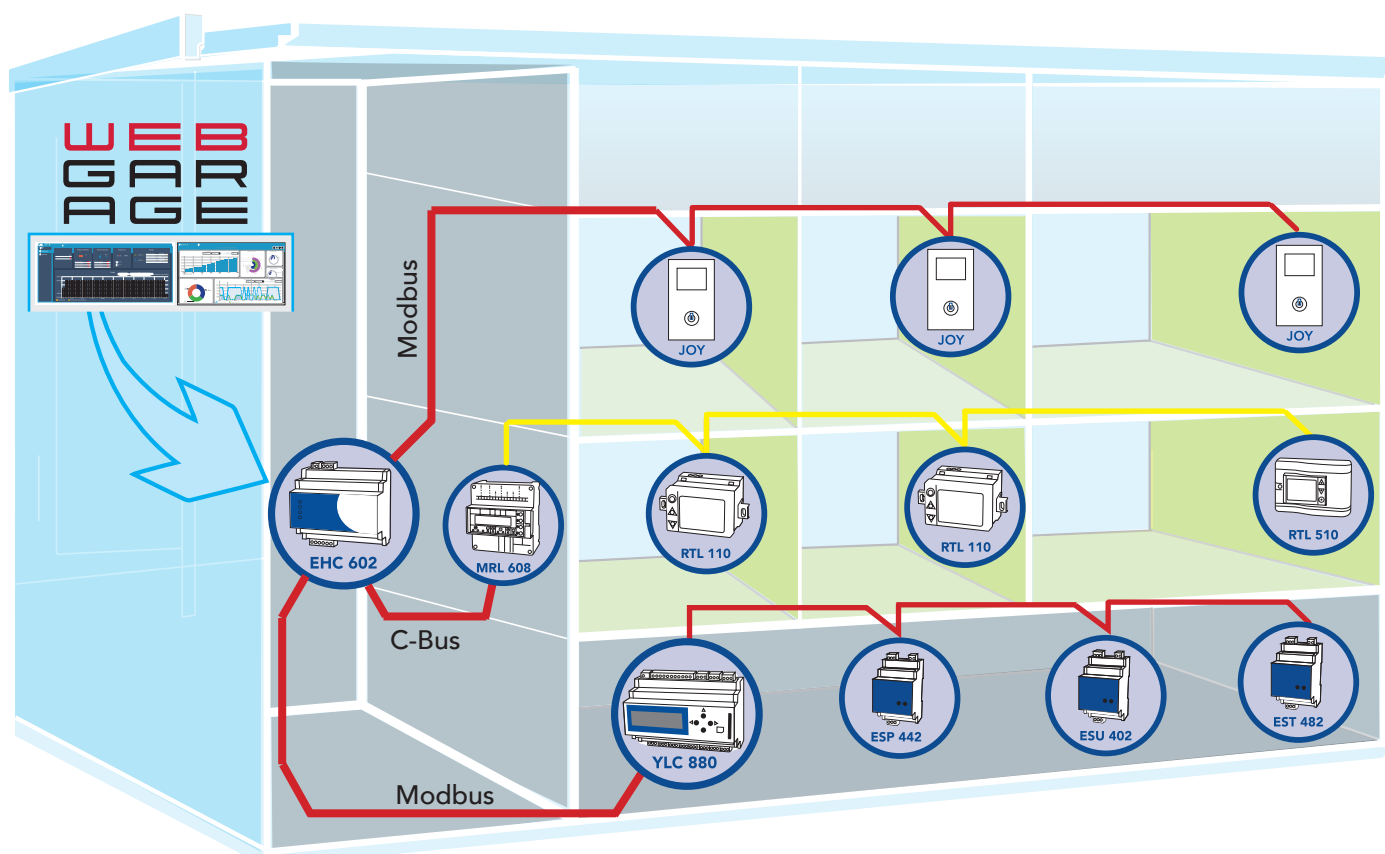

Light control

Inside the building, centralised and efficient lighting control will be increasingly essential.

The reasons are straightforward:

- Reduction of energy consumption, considerable reduction of energy consumption: adaptive control algorithms identify available daylight to ensure ideal lighting conditions and increase occupant well-being. Room presence control allows for the implementation of scenarios to reduce and/or switch off lighting fixtures when not needed by the occupants.
- Reduced maintenance effort, operating parameters such as fault conditions, operating hours and energy consumption of each individual device can be accessed centrally.
- Synergies through integration with other building automation and management systems. Integration with HVAC control systems completes the COSTER building automation solution.



COMMUNICATION
PROTOCOLS



BDL 0..

DALI GATEWAY TO BACNET IP AND BACNET MS/TP

DALI gateway to BACnet IP or BACnet MS/TP with configuration via integrated webserver. All BDL models ... are equipped with an integrated DALI bus power supply. BDL 001 and BDL 002 can supply the DALI channel with a guaranteed supply current of 230 mA, while BDL 004 can supply 116 mA per DALI channel.

BDL 001	DALI Gateway to BACNET IP 1-channel/DALI port
BDL 002	DALI gateway to BACNET IP 1 to 2 channels/DALI ports
BDL 004	DALI gateway to BACNET IP 1 to 4 channels/DALI ports



COMMUNICATION
PROTOCOLS



PDA 004

DALI CHANNEL AUXILIARY POWER SUPPLY

Power supplies are used to amplify the power supply to up to four DALI channels/ports. For each channel, the power supplies provide a guaranteed supply current of 116 mA to power the devices connected to the DALI channel.

If the DALI devices connected to the channel consume more than 116 mA, two DALI outputs of the power supplies can be used in parallel, resulting in a guaranteed supply current of 232 mA (maximum supply current of 250 mA).

COMMUNICATION
PROTOCOLS

PDD 001

LIGHT AND PRESENCE SENSOR FOR FALSE CEILING INSTALLATION

Presence detection via passive IR element. Operating range of the light sensor: 5...2000 lx. Detection height up to 4 metres.

Operating indicator LED:

Suitable for indoor applications: Classrooms, Conference Rooms, Corridors, Open space.

Can be integrated into lighting and building management systems supporting DALI-2 sensors.

COMMUNICATION
PROTOCOLS

PDD 002

LIGHT AND PRESENCE SENSOR FOR FALSE CEILING INSTALLATION

Presence detection via passive IR element.

Suitable for indoor applications: Individual Offices, Open Space Offices, Classrooms, Conference Rooms and Corridors.

Mounting height: 2...5 metres.

Adapter for ceiling installation. Quick and easy installation via wire springs.

Power supply via DALI bus (no mains connection required). Presence detection angle adjustable from 40° to 90° thanks to integrated shutters. Can be integrated into lighting and building management systems supporting DALI-2 sensors.

COMMUNICATION
PROTOCOLS

PDD 003

LIGHT AND MOTION SENSOR FOR CEILING INSTALLATION

Motion detection via passive IR element. Operating range of the light sensor: 5...2000 lx. Detection height up to 4 metres.

Area of application: Underground parking, multi-storey car park, storage and parking areas, stairs.

Protection class IP 54.

Power supply via DALI bus (no mains connection required). Several sensors can be connected to the same DALI line.

Can be integrated into lighting and building management systems supporting DALI-2 sensors.

COMMUNICATION
PROTOCOLS

PDD 004

LIGHT AND MOTION SENSOR FOR CEILING INSTALLATION

Motion detection via passive IR element

Operating range of the light sensor: 5...2000 lx (measured at the sensor).

Detection height up to 14 metres (detection range optimised for great heights).

Area of application: Industry, high bay warehouses, suitable for high installation heights, production halls, entrance halls.

Protection class IP 54.

Power supply via DALI bus (no mains connection required). Several sensors can be connected to the same DALI line.

Can be integrated into lighting and building management systems supporting DALI-2 sensors.



COMMUNICATION
PROTOCOLS



PDD 005

LIGHT AND MOTION SENSOR FOR FALSE CEILING INSTALLATION

Motion detection via passive IR element

Operating range of the light sensor: 5...2000 lx (measured on the sensor)

Detection height up to 17 metres.

Area of application: Industry, high bay warehouses, suitable for high installation heights, production halls, entrance halls

Protection class IP 65 (under installation conditions)

Power supply via DALI bus (no mains connection required) Multiple sensors can be connected to the same DALI line.

Can be integrated into lighting and building management systems supporting DALI-2 sensors.



PDS 001

PRESENCE AND BRIGHTNESS SENSOR WITH PHYSICAL CONTACT

Suitable for high installation heights: Industry, production departments, halls. 3 to 10 m: detection of people's movement.

3 to 13 m: detection of vehicle movement (e.g. forklift truck). Adjustable switch-off delay: From 30 seconds to 20 minutes.

Can be integrated into lighting and building management systems supporting DALI-2 sensors.



COMMUNICATION
PROTOCOLS



PBD 400

DALI PUSH-BUTTON COUPLE

4 floating inputs

Standard pushbuttons/switches can be used.

Suitable for installation in flush-mounted boxes in individual offices, classrooms and conference rooms.

Power supply via DALI bus (no mains connection required)

Can be integrated into lighting and building management systems supporting DALI-2 sensors.



MONITORING SYSTEM



COMMUNICATION PROTOCOLS



The importance of analysis, from monitoring to supervision

There is an increasing need for dedicated systems for measuring consumption and environmental parameters, in the industrial, services, managerial and public sectors. We build systems that meet legal standards with rigorous energy measurements, direct metering and distribution. Can be used in any private or public building. Our offer includes monitoring of electricity, heat, water and all the main environmental parameters necessary for the evolved management of buildings and production processes: temperature, humidity, pressure, CO2 and air quality. The use of an open communication protocol that can be easily integrated in third party systems makes our Monitoring solution flexible, scalable and easy to consult.



COMMUNICATION
PROTOCOLS



EHC 602

EDGE DEVICE MULTIPROTOCOL BACNET AND MODBUS

Optimises communication with YLC / ZBC controllers and can manage and monitor field devices.

It manages three types of system:

- Adjustment with YLC 880 / ZBC 862 + corresponding expanders
- Energy monitoring
- Hybrid or Mixed (control and monitoring)


It is equipped with a web interface that can be reached via an Ethernet port or Wi-Fi. Allows the acquisition of Modbus, BACnet and M-bus devices, with the possibility of exploiting a flexible and cost-effective architecture with wireless devices such as CSW 868, BRG 868C and BRG 868.

Possibility of installing a webgarage licence on the device up to a maximum of 2000 points.

It can work as stand-alone unit or in a network. Communication ports:

- 2 for RS 485
- 1 M-Bus
- 1 C-Bus
- 2 Ethernet ports, Power supply 12V DC and 24V AC. 6 module DIN enclosure.

Dashboard: Thermal consumption

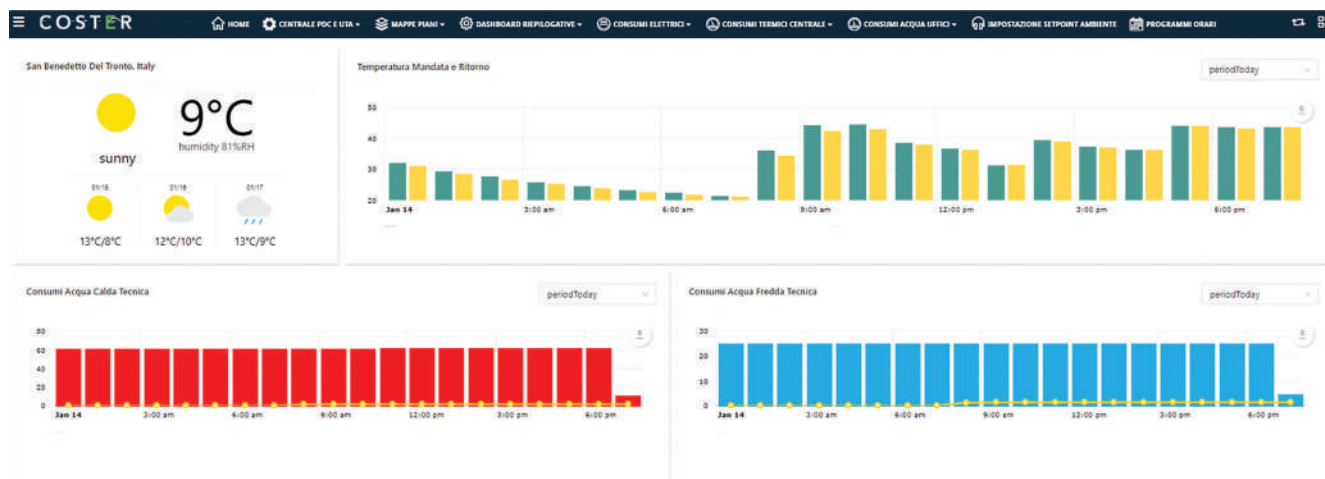




Monitoring system architecture

For acquisition of environmental parameters (temperature, humidity, CO₂) and consumption (thermal energy, electricity, fuels).

EHC 602 with embedded Webgarage acquires, captures, historicises data and displays them on customisable graphic pages.

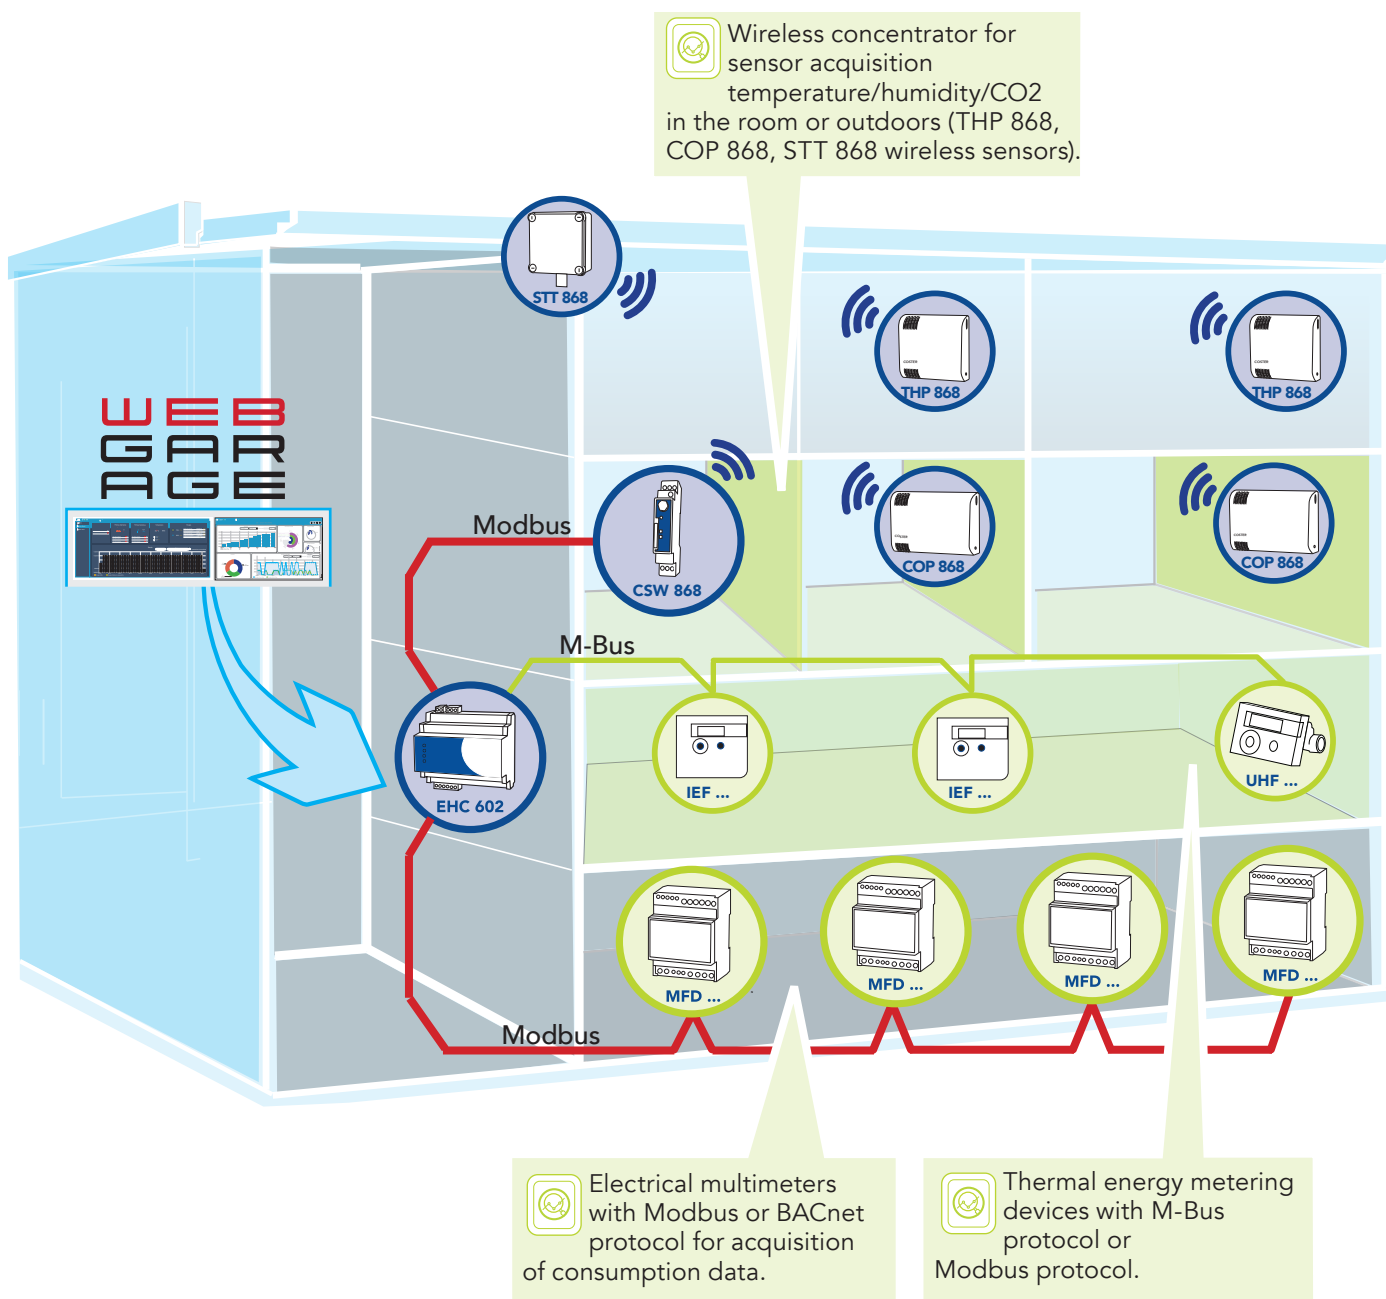



COMMUNICATION
PROTOCOLS



EST 482

EXPANSION MODULE

Expansion module with 8 universal inputs (digital, analogue and resistive sensors). The module is provided with RS485 port that makes communication possible through the Modbus RTU protocol.
12V DC and 24V AC power supply. 4 module DIN enclosure.



COMMUNICATION
PROTOCOLS



BRG 868

WIRELESS BRIDGE MODULE

BRG 868 Bridge Module is a tool that allows a wireless connection(*) to be created between the BRG 868C Bridge Concentrator and one or more field devices.
ANTENNA INCLUDED.
1 module DIN enclosure.

BRG 868	Wireless bridge module
----------------	------------------------

RELATED PRODUCT

APA 500	SMA antenna extension, length 5 meters
----------------	--



COMMUNICATION
PROTOCOLS



BRG 868C

WIRELESS BRIDGE CONCENTRATOR

The BRG 868 C Concentrator is a device for creating a wireless connection(*) between a Master and one or more BRG 868s (up to 16) in turn connected to field devices via bus RS-485.
ANTENNA INCLUDED.
1 module DIN enclosure.

BRG 868C	Wireless bridge concentrator
-----------------	------------------------------

RELATED PRODUCT

APA 500	SMA antenna extension, length 5 meters
----------------	--

ANT 868	Upgraded antenna for 868 concentrators
----------------	--

(*) As an alternative to wired connection

COMMUNICATION
PROTOCOL

CSW 868

WIRELESS SENSOR CONCENTRATOR

System module enabling wireless connection with one or more wireless devices (up to 40):

- THP 868
- PCP 868
- COP 868
- STT 868H
- STU 868H
- ATR 868

It provides two-way communication with wireless field devices. Can be combined with Y... and Z... series controllers, or with EHC 602 or YHC 700. 12V DC power supply
1 module DIN enclosure. ANTENNA INCLUDED.

CSW 868	Wireless sensor concentrator
----------------	------------------------------

RELATED PRODUCTI

APA 500	SMA antenna extension, length 5 meters
----------------	--

ANT 868	Upgraded antenna for 868 concentrators
----------------	--



PCP 868

WIRELESS PULSE METER

PCP 868 can acquire and transmit to the CSW 868 concentrator the values of two pulse inputs acquired from the environment in which they are installed

PCP 868	Wireless pulse meter
----------------	----------------------



GSP 485

MODBUS PULSE METER

Device for reading meters with pulse output.

The device, with three DIN modules, allows the user to query the tools connected to it, using the RS 485 interface.

12 V DC power supply.

3 module DIN enclosure.

GSP 485	Converter with RS 485 interface
----------------	---------------------------------

RELATED PRODUCT

EHC 602	Edge Device multiprotocollo BACnet e Modbus
----------------	---

YHC 700	Network Manager Modbus/TCP
----------------	----------------------------



COMMUNICATION
PROTOCOLS



CMC 422 - 428

M-BUS/MODBUS - M-BUS/C-BUS PROTOCOL CONVERTER

M-Bus/ModBus or M-Bus/C-Bus protocol converter for acquiring thermal energy meter data (up to 5 interrogable devices).
4 module DIN enclosure.

		Power supply
CMC 422	MBus / ModBus converter up to 5 devices	12...24 V AC/DC
CMC 428	MBus / ModBus converter up to 5 devices	230 V AC

RELATED PRODUCT

MWM 000 M-Bus/Wireless M-Bus converter



MWM 000

CONVERTER M-BUS/WIRELESS M-BUS

Wireless M-Bus to M-Bus gateway for 5 devices. It can only be used with CMC 422 and CMC 428.

MWM 000 Non-transparent converter from M-Bus to C-Bus



CMC 328

CONVERTER OF M-BUS TO C-BUS

Connection of devices equipped with M-Bus (e.g.: heat meter) to the C-Bus line.

CMC 328 Converter for a device from M-Bus to C-Bus



MFD ...

ELECTRICAL NETWORK ANALYSER

4 module DIN enclosure.

MFD 438	Multifunctional network analyser. Power supply 80...265V AC 100...300V DC Communi- cation protocol Bacnet MS/TP
MFD 448	Single-phase / three-phase multifunctional network analyser. Possibility of direct TA connection with se- condary 1-5A Power supply 80...265V AC 100...300V DC Communi- cation protocol Modbus RS 485
MFD 548	Single-phase / three-phase multifunctional network analyser. Possibility of direct TA connection with se- condary 1-5A Power supply 80...265V AC 100...300V DC Communi- cation protocol Modbus RS 485 MID Certified version MID.
MFD 418	Three-phase electrical network analyser with Ro- gowsky coils

PRODUCTS RELATED TO MFD 418

BRK 001	Rogowsky 1660A coils 1660A (32,5A - 1950A)
BRK 003	Extension for Rogowsky 3-meter Coils

OPENABLE OR PASS-THROUGH CURRENT TRANSFORMERS ON REQUEST



MHN ...

COMPACT MECHANICAL THERMAL ENERGY METERS (3...90 °C)

Suitable for measuring thermal energy in heating and air conditioning systems. They can be installed indifferently on the supply or on the return.

Energy meters with:

- hot/cold

CERTIFICATION: MID DE-07-MI004-PTB 025

ACCURACY CLASS: EN 1434-1:2007, class 3

	DN inches	Connections inches	T max. °C	Qp m³/h	Qs m³/h	Qstart lt/h	Qi lt/h Horiz. Vert	Kvs m³/h	Δp Qp kPa
MHN 15-1,5	1/2"	3/4"	90	1,5	3	7	7 7	3,5	19,6
MHN 20-2,5	3/4"	1"	90	2,5	5	10	10 10	6,3	16,5



COMMUNICATION
PROTOCOLS

M-Bus

MHF ...

COMPACT MECHANICAL THERMAL ENERGY METERS (3...90 °C)

Suitable for measuring thermal energy in heating and air conditioning systems. They can be installed indifferently on the supply or on the return.

Energy meters with:

- Data transmission via M-Bus cable

- hot/cold

CERTIFICATION: MID DE-07-MI004-PTB 025; ACCURACY CLASS : EN 1434-1:2007, class 3.

The unit is equipped with M-Bus, which can be converted to C-Bus with CMC 328, CMC 422 and CMC 428 converters.

	DN inches	Connections inches	T max. °C	Qp m³/h	Qs m³/h	Qstart lt/h	Qi lt/h Horiz. Vert	Kvs m³/h	Δp Qp kPa
MHF 15-1,5	1/2"	3/4"	90	1,5	3	7	7 7	3,5	19,6
MHF 20-2,5	3/4"	1"	90	2,5	5	10	10 10	6,3	16,5

RELATED PRODUCTS

CMC 328 M-Bus - C-Bus Converter

3 IMP Addition of 3 pulse inputs

KEY

(1): Flange to flange length

2): MI-001.certified

Qp: Nominal flow rate:
Maximum continuous flow
rate measurable by counter

Qs: Maximum temporary
flow rate supported by the
counter

Qt: Transition flow rate:
minimum limit with error
less than +2%

Qi: Minimum limit flow rate:
minimum limit with error
less than +5%

Kvs: Flow rate coefficient:
Flow rate in m³/h at 1 bar
pressure drop

Δp Qp: Pressure drop at
nominal flow rate Qp

COMMUNICATION
PROTOCOLSWIRELESS **M-Bus**

MHR ...

WIRELESS THERMAL ENERGY METERS

This is a tool for metering the thermal energy supplied to utilities using water as the energy transport element. It can be used in a wide range of systems: heating, air conditioning and typical domestic systems. Can be installed indifferently on the supply or on the return, after the

appropriate configuration by means of an infrared optical head. MID MI004 CERTIFICATION

Energy meters with:

- Data transmission via wireless M-Bus
- Hot/Cold

	DN inches	Connections inches	T max. °C	Qp m³/h	Qs m³/h	Qi lt/h Horiz. Vert	Kvs m³/h	Δp Qp kPa
MHR 15-1,5	1/2"	3/4"	90	1,5	3	7 7	3,5	19,6
MHR 20-2,5	3/4"	1"	90	2,5	5	10 10	6,3	16,5

RELATED PRODUCT

3 IMP Addition of 3 pulse inputs



UHN ...

COMPACT ULTRASONIC THERMAL ENERGY METER (3...90 °C)

Suitable for measuring thermal energy in heating and air conditioning systems. They can be installed indifferently on the supply or on the return.

Energy meters with:

- hot/cold

CERTIFICATION: MID DE-07-MI004-PTB 025; ACCURACY CLASS : EN 1434-1:2007, class 3

	DN mm	Connections inches	T max °C	Qp m³/h	Qs m³/h	Qi lt/h	Δp Qp kPa
UHN 15-1,5	15	G3/4"	90	1,5	3	12	21,0
UHN 20-2,5	20	G1"	90	2,5	5	25	12,0
UHN 20-3,5	20	G1"	90	3,5	7	28	21,0
UHN 25-3,5	25	G1" 1/4	90	3,5	7	28	21,0
UHN 25-6	25	G1" 1/4	90	6	12	60	20,0
UHN 40-10	40	G2"	90	10	20	100	11,0

KEY

(1): Flange to flange length
2): MI-001.certified

Qp: Nominal flow rate:
Maximum continuous flow
rate measurable by counter

Qs: Maximum temporary
flow rate supported by the
counter

Qt: Transition flow rate:
minimum limit with error
less than +2%

Qi: Minimum limit flow rate:
minimum limit with error
less than +5%

Kvs: Flow rate coefficient:
Flow rate in m³/h at 1 bar
pressure drop

Δp Qp: Pressure drop at
nominal flow rate Qp



COMMUNICATION
PROTOCOLS

M-Bus

UHF ...

ULTRASONIC COMPACT M-BUS THERMAL ENERGY METERS (3...90 °C)

Suitable for measuring thermal energy in heating and air conditioning systems. They can be installed indifferently on the supply or on the return.

Energy meters with: Hot/cold; Data transmission via M-Bus via cable. CERTIFICATION: MID DE-07-MI004-PTB 025;

ACCURACY CLASS : EN 1434-1:2007, class 3.

The unit is equipped with M-Bus, which can be converted to C-Bus with CMC 328 converter.

	DN mm	Connections inches	T max °C	Qp m³/h	Qs m³/h	Qi lt/h	Δp Qp kPa
UHF 15-1,5	15	G3/4"	90	1,5	3	12	21,0
UHF 20-2,5	20	G1"	90	2,5	5	25	12,0
UHF 20-3,5	20	G1"	90	3,5	7	28	21,0
UHF 25-3,5	25	G1" 1/4	90	3,5	7	28	21,0
UHF 25-6	25	G1" 1/4	90	6	7	60	20,0
UHF 40-10	40	G2"	90	10	20	100	11,0

RELATED PRODUCTS

CMC 328 M-Bus - C-Bus Converter

3 IMP Addition of 3 pulse inputs



COMMUNICATION
PROTOCOLS

Modbus

UHM ...

ULTRASONIC COMPACT MODBUS THERMAL ENERGY METERS (3...90 °C)

Suitable for measuring thermal energy in heating and air conditioning systems. Can be installed indifferently on the supply or on the return, after appropriate configuration by means of an infrared optical head.

Energy meters with Modbus protocol communication via cable.

CERTIFICATION: MID DE-074-MI0054-PTB 025

ACCURACY CLASS: EN 1434-1:2007, Class 3.

	DN mm	Connections inches	T max °C	Qp m³/h	Qs m³/h	Qi lt/h	Δp Qp kPa
UHM 15-1,5	15	G3/4"	90	1,5	3	12	21,0
UHM 20-2,5	20	G1"	90	2,5	5	25	12,0
UHM 20-3,5	20	G1"	90	3,5	7	28	21,0
UHM 25-3,5	25	G1" 1/4	90	3,5	7	28	21,0
UHM 25-6	25	G1" 1/4	90	6	7	60	20,0
UHM 40-10	40	G2"	90	10	20	100	11,0

KEY

Qp: Nominal flow rate: Maximum continuous flow rate measurable by counter

Qs: Maximum temporary flow rate supported by the counter

Qt: Transition flow rate: minimum limit with error less than +2%

Qi: Minimum limit flow rate: minimum limit with error less than +5%

Kvs: Flow rate coefficient: Flow rate in m³/h at 1 bar pressure drop

Δp Qp: Pressure drop at nominal flow rate Qp

COMMUNICATION
PROTOCOLSWIRELESS **M-Bus**

UHR ...

WIRELESS ULTRASONIC COMPACT THERMAL ENERGY METERS (3...90 °C)

Suitable for measuring thermal energy in heating and air conditioning systems. Can be installed on the supply or return, after appropriate configuration by means of an infrared optical head.

Energy meters with: Hot/cold; Data transmission via wireless M-Bus CERTIFICATION: MID DE-07-MI004-PTB 025; ACCURACY CLASS : EN 1434-1:2007, Class 3

	DN mm	Connections inches	T max °C	Qp m³/h	Qs m³/h	Qi l/h	Δp Qp kPa
UHR 15-1,5	15	G3/4"	90	1,5	3	12	21,0
UHR 20-2,5	20	G1"	90	2,5	5	25	12,0
UHR 20-3,5	20	G1"	90	3,5	7	28	21,0
UHR 25-3,5	25	G1" 1/4	90	3,5	7	28	21,0
UHR 25-6	25	G1" 1/4	90	6	12	60	20,0
UHR 40-10	40	G2"	90	10	20	100	11,0

RELATED PRODUCTS

3 IMP

Addition of 3 pulse inputs



LEGENDA

- Q1:** The minimum flow rate at which the counter must operate while respecting the defined errors
- Q2:** The minimum flow rate at which the counter must operate while respecting the defined errors with respect to the upper flow rate range
- Q3:** Permanent flow rate: continuous flow rate measurable by the counter
- Q4:** Overload flow rate: maximum supported by the counter Δp
- Q3:** Permanent flow rate pressure drop
- Kvs:** Flow rate coefficient: Flow rate in m³/h at 1 bar pressure drop

(*) Depending on installation location (further information on data sheet) at costergroup.eu

KUF-KUC

SINGLE-JET TURBINE VOLUMETRIC METERS WITH REED CONTACT PULSE EMITTER FOR DOMESTIC HOT WATER HOT AND COLD

Turbine volumetric meters for measuring domestic hot water consumption cold. Output with "reed" contact pulse emitter.

KUF/KUC 15 -20 Compliance: (B) TCM 142/20 -5700 (D) 0119-SJ-A010-08

KUF 25 Compliance: (B) TCM142/08-4627 (D) 0119-SJ-A010-08

DO NOT USE THESE METERS FOR COLD OR HOT WATER CIRCULATION IN HEATING/ AIR CONDITIONING SYSTEMS THE WATER IN THESE SYSTEMS CONTAINS MANY IMPURITIES THAT DO NOT ENABLE CORRECT COUNTING.

	T max 50 °C	DN inches	length mm	R Q1/Q3	Q3 m³/h	Q4 m³/h	Q2 l/h	Q1 l/h	Δp Q3 bar	Kvs m³/h	Pulse emitters l/imp
KUF 15D		1/2"	110	100	2,5 ^(*)	3,13 ^(*)	40 ^(*)	25 ^(*)	0,63	3	10
KUF 20D		3/4"	130	100	4 ^(*)	5 ^(*)	64 ^(*)	40 ^(*)	0,63	5	10
KUF 25C		1"	160	160	6,3	7,88 ^(*)	63,01 ^(*)	39,38 ^(*)	0,63	8	100
T max 90 °C											
KUC 15D		1/2"	110	100	2,5 ^(*)	3,13 ^(*)	40 ^(*)	25 ^(*)	0,63	3	10
KUC 20D		3/4"	130	100	4 ^(*)	5 ^(*)	64 ^(*)	40 ^(*)	0,63	5	10



COMMUNICATION
PROTOCOLS

WIRELESS **M-Bus**

KUF ..W-N - KUC ..W-N

WIRELESS METER

Single-jet dry dial meter with superdry magnetic transmission
for cold or hot water.

KUF/KUC 15 -20 Compliance: (B) TCM 142/20 -5700 (D) 0119-SJ-A010-08

CERTIFICATION MID MI-001

T max 50 °C	DN inches	length mm	R Q1/Q3	Q3 m³/h	Q4 m³/h	Q2 lt/h	Q1 lt/h	Δp Q3 KPa	Kvs m³/h
KUF 15W-N	1/2"	110	100	2,5 ^(*)	3,13 ^(*)	40 ^(*)	25 ^(*)	0,63	3
KUF 20W-N	3/4"	130	100	4 ^(*)	5 ^(*)	64 ^(*)	40 ^(*)	0,63	5
T max 90 °C									
KUC 15W-N	1/2"	110	100	2,5 ^(*)	3,13 ^(*)	40 ^(*)	25 ^(*)	0,63	3
KUC 20W-N	3/4"	130	100	4 ^(*)	5 ^(*)	64 ^(*)	40 ^(*)	0,63	5



COMMUNICATION
PROTOCOLS

M-Bus

IEF 276

ELECTRONIC HOT/COLD ENERGY INTEGRATOR

Metering of heating and cooling energy.

CERTIFICATION: MID MI 004

With additional inputs

ESSENTIAL SENSORS AND ACCESSORIES: 1 pair of sensors + 1 immersion kit, or 1 pair of sensors + 1 pair of pockets, or

1 pair of sensors + 1 direct immersion kit + 1 pair of "T" fittings

Sensors and accessories comply with MID 2004/22/CE

IEF 276-10	Electronic energy integrator litres/pulse 10 ⁽¹⁾
IEF 276-100	Electronic energy integrator litres/pulse 100 ⁽¹⁾
IEF 276-1000	Electronic energy integrator litres/pulse 1000 ⁽¹⁾

RELATED PRODUCTS

SPT 106	Pair of sensors with 10 metre cable diameter 6 mm
SPT 006	Pair of sensors with 3 metre cable diameter 6 mm
GIS 062	Pair of brass pockets for sensors (1/4") 62 + 18 mm
GIS 112	Pair of brass pockets for sensors (1/4") 112 + 18 mm
CMC 328	M-Bus/C-Bus Converter
3 IMP	Addition of 3 pulse inputs

(1) Different pulse weights on request

COMMUNICATION
PROTOCOLS

ITEM 277

ELECTRONIC MODBUS/RTU HOT/COLD ENERGY INTEGRATOR

Metering of heating and cooling energy.

The device requires an additional 12 V dc power supply.

CERTIFICATION: MID MI 004

ESSENTIAL SENSORS AND ACCESSORIES:

1 pair of sensors + 1 immersion kit, or 1 pair of sensors + 1 pair of pockets, or

1 pair of sensors + 1 direct immersion kit + 1 pair of "T" fittings

Sensors and accessories comply with MID Directive MID 2004/22/CE

ITEM 277-10 Modbus/RTU electronic energy integrator litres/pulse 10 ⁽¹⁾

ITEM 277-100 Modbus/RTU electronic energy integrator litres/pulse 100 ⁽¹⁾

ITEM 277-1000 Modbus/RTU electronic energy integrator litres/pulse 1000 ⁽¹⁾

RELATED PRODUCTS

SPT 106 Pair of sensors with 10 metre cable diameter 6 mm

SPT 006 Pair of sensors with 3 metre cable diameter 6 mm

GIS 062 Pair of brass pockets for sensors (1/4") 62 + 18 mm

GIS 112 Pair of brass pockets for sensors (1/4") 112 + 18 mm

COMMUNICATION
PROTOCOLS

WIRELESS



IEW 278

WIRELESS HOT/COLD ELECTRONIC ENERGY INTEGRATOR

Metering of heating and cooling energy. CERTIFICATION: MID MI 004

With additional inputs

ESSENTIAL SENSORS AND ACCESSORIES:

1 pair of sensors + 1 immersion kit, or 1 pair of sensors + 1 pair of pockets, or

1 pair of sensors + 1 direct immersion kit + 1 pair of "T" fittings

Sensors and accessories comply with MID Directive 2004/22/CE

IEW 278-10 Modbus/RTU electronic energy integrator litres/pulse 10 ⁽¹⁾

IEW 278-100 Modbus/RTU electronic energy integrator litres/pulse 100 ⁽¹⁾

IEW 278-1000 Modbus/RTU electronic energy integrator litres/pulse 1000 ⁽¹⁾

RELATED PRODUCTS

SPT 106 Pair of sensors with 10 metre cable diameter 6 mm

SPT 006 Pair of sensors with 3 metre cable diameter 6 mm

GIS 062 Pair of brass pockets for sensors (1/4") 62 + 18 mm

GIS 112 Pair of brass pockets for sensors (1/4") 112 + 18 mm

CMC 328 M-Bus/C-Bus Converter

3 IMP Addition of 3 pulse inputs

(1) Different pulse weights on request



KMF ...

MULTI-JET TURBINE

VOLUMETRIC METERS

WITH "REED" CONTACT PULSE EMITTER

Multi-jet turbine volumetric meters for domestic cold water metering.
Output with "reed" contact pulse emitter compatible with all meters with pulse input.

CERTIFICATION KMF ...: MID MI-001

T max 50 °C horizontal	DN inches	length mm	Q3 m³/h	Q4 m³/h	Q1 lt/h	Q2 lt/h	Kvs m³/h	Pulses emitters litres/ pulse
KMF 15D ⁽³⁾	1/2"	165	2,5	3,13	15,63	25	3,0	10
KMF 20D ⁽³⁾	3/4"	190	4,0	5,0	25	40	5,0	10
KMF 25C ⁽³⁾	1"	260	6,3	7,9	40	63	6,8	100
KMF 32C ⁽³⁾	1" 1/4	260	10	12,5	62,50	100	9,5	100
KMF 40C ⁽³⁾	1" 1/2	300	16	20,0	100	160	20	100
KMF 50C ⁽³⁾	2"	300	25	31,0	156	250	30	100

^(*) Depending on installation location
(further information on data sheet) at
costergroup.eu

KEY

Q1: The minimum flow rate
at which the meter must
operate while respecting
the defined errors

Q2: The minimum flow rate
at which the meter must
operate while respecting
the defined errors with
respect to the upper flow
rate range

Q3: Permanent flow rate:
continuous flow rate
measurable by the meter
Q4: Overload flow rate:
maximum supported by
the counter

Kvs: Flow rate coefficient:
Flow rate in m³/h at 1 bar
pressure drop

Δp Q3: Pressure drop at
permanent flow



KWP-KWM

WOLTMAN TURBINE VOLUMETRIC METERS WITH REED CONTACT PULSE EMITTER

Woltman turbine volumetric meters for measuring domestic hot and cold water and water circulating in heating/cooling systems. Output with "reed" contact pulse emitter compatible with all meters with pulse input and IEF and IEW integrators.

CERTIFICATION KWP ...: MI-001

CERTIFICAZION KWM ...: MI-004

Although KWM... meters are approved up to 130 °C, for application in heating systems, the use of static-type volumetric meters, such as the ultrasonic KMHG and KMHF models, is recommended.

For length see data sheet at www.costergroup.eu

Cold water	DN mm	T max °C	Q3 m³/h	Q4 m³/h	Q2 m³/h		Pulses emitters litres/pulse
					vert.	horiz.	
KWP 50C	50	50	40	50	0,64	–	100
KWP 65C	65	50	63	78,8	1,01	–	100
KWP 80C	80	50	100	125	1,6	–	100
KWP 100C	100	50	160	200	2,56	–	100
KWP 125C	125	50	160	200	2,56	–	1000
KWP 150M	150	50	250	312,5	4,0	–	1000
KWP 200M	200	50	250	500	6,4	–	1000
Hot water	DN mm	T max °C	Qp m³/h	Qs m³/h	Qi m³/h		
					vert.	horiz.	
KWM 50/C1	50	130	15	30	1,5	0,6	100
KWM 65/C1	65	130	25	50	2,5	1	100
KWM 80/C1	80	130	40	80	4	1,6	100
KWM 100/C1	100	130	60	120	6	2,4	100
KWM 125/C1	125	130	100	200	10	4	100
KWM 150/C1	150	130	150	300	15	6	1000

KEY Certification MI001

Q1: The minimum flow rate at which the counter must operate while respecting the defined errors

Q2: The minimum flow rate at which the counter must operate while respecting the defined errors with respect to the upper flow rate range

Q3: Permanent flow rate: continuous flow rate measurable by the meter

Q4: Overload flow rate: maximum supported by the counter

Kvs: Flow rate coefficient: Flow rate in m³/h at 1 bar pressure drop

Δp Q3: Pressure drop at permanent flow

LEGENDA Certification MI004

Qp: Nominal flow rate: Maximum continuous flow rate measurable by the meter

Qs: Maximum temporary flow rate supported by the meter

Qt: Transition flow rate: minimum limit with error less than ±2%

Qi: Minimum limit flow rate: minimum limit with error less than ±5%

Kvs: Flow rate coefficient: Flow rate in m³/h at 1 bar pressure drop

Δp Qp: Pressure drop at nominal flow rate Qp



KMHG - KMHF - KBHF

ULTRASONIC VOLUMETRIC METERS (5...130 °C)

WITH ELECTRONIC PULSE EMITTER FOR

CIRCULATION IN HEATING SYSTEMS HOT-COLD VERSION

Ultrasonic volumetric meters for measuring circulating water in heating and cooling systems, which can be installed on the return.

Not compatible with glycol. Output with electronic pulse emitter compatible with thermal energy integrators IEF ... and IEW ...

CERTIFICATION MID DE-07-MI004-OJC218 accuracy class EN 1434 class 2. These ultrasonic meters are intended for use with fluid temperatures ranging 10 to 130 °C for heating applications and 5 to 50 °C for air conditioning applications.

For dimensions see data sheet at [su www.costergroup.eu](http://su.www.costergroup.eu)

THREADED	DN mm	Connections inches	PN	Qp m³/h	Qs m³/h	Qi lt/h	Qstart lt/h	Kvs	Δp Qp kPa	litres pulse
KMHG 25-3,5	25	1"1/4	16	3,5	7	35	14	15	5,5	10
KMHG 25-6	25	1"1/4	16	6	12	60	12	16	14	10
KMHG 40-10	40	2"	16	10	20	100	28	30	11	10
FLANGED										
KMHF 25-3,5	25	—	25	3,5	7	35	7	15	5,5	10
KMHF 25-6	25	—	25	6	12	60	7	16	14	10
KMHF 40-10	40	—	25	10	20	100	15	28	13	10
KMHF 50-15	50	—	25	15	30	150	40	45	11	100
KMHF 65-25	65	—	25	25	50	250	50	77	10,5	100
KMHF 80-40	80	—	25	40	80	400	80	100	16	100
KMHF 100-60	100	—	25	60	120	600	120	177	11,5	100

AVAILABLE FROM APRIL 2025 - will replace KMHF

FLANGED	DN mm	Connections inches	PN	Qp m³/h	Qs m³/h	Qi lt/h	Qstart lt/h	Kv	Δp Qp kPa	litres pulse
KBHF 50-15	50	—	16	15	30	150	10	2,30	4,3	10
KBHF 65-25	65	—	16	25	50	250	20	4,46	2,8	10
KBHF 80-40	80	—	16	40	80	400	30	8,31	2,3	10
KBHF 100-60	100	—	16	60	120	600	50	10,30	3,4	10
KBHF 125-100	125	—	25	100	200	1000	80	13,68	5,3	100
KBHF 150-150	150	—	25	150	300	1500	100	18,90	6,3	100
KBHF 200-250	200	—	25	250	500	2500	200	38,16	4,3	100
KBHF 250-400	250	—	25	400	800	4000	300	57,56	4,8	100
KBHF 300-600	300	—	25	600	1200	6000	400	78,52	5,8	100

COMMUNICATION
PROTOCOLS

C-BUS

XGG 618

"DAY DEGREES" COUNTING AND STORAGE UNITS

It counts and records the trend of conventional winter day degrees.

ESSENTIAL SENSORS: 1 outside sensor for day degrees counting; model SGG 001.

XGG 618 Day degrees metering and storage unit

RELATED PRODUCTS

ACB 460 Plug-in for communication via C-Bus

SGG 001 Outside temperature sensor for day degrees measurement

COMMUNICATION
PROTOCOLS

C-BUS

UCI 328

COUNT UNIT OF TWO PULSE INPUTS (CONTACT CLOSURES)

It counts and records the trend of conventional winter day degrees.

ESSENTIAL SENSORS: 1 outside sensor for day degrees counting; model SGG 001.

UCI 328 Pulse count unit



COMMUNICATION
PROTOCOLS

M-Bus

EQX 424

DATA LOGGER WITH M-BUS PROTOCOL

M-Bus/ModBus protocol converter for thermal energy meter data acquisition in 4 DIN module housing.

24V AC/DC power supply.

EQX 424 Data logger with cable and wireless M-Bus protocol

RELATED PRODUCTS

GTW 208 M-Bus/Modbus converter specifically for EQX 424



GTW 208

M-BUS/MODBUS CONVERTER (SPECIFICALLY FOR EQX 424)

Up to 250 variables queried. 2 module DIN enclosure.
12/24V DC power supply.

GTW 208 M-Bus/Modbus Converter



COMMUNICATION
PROTOCOLS

M-Bus

EQL ...

M-BUS LEVEL CONVERTER

To manage 60 or 250 devices. Data reading from M-Bus cable type meters.
4 module DIN enclosure.

EQL 060 M-Bus converter to manage up to 60 devices
on the same M-Bus line.

EQL 250 M-Bus converter to manage up to 250 devices
on the same M-Bus line.



COMMUNICATION
PROTOCOLS

M-Bus

RPT 001

WIRELESS M-BUS REPEATER/RECEIVER

For meters with wireless M-Bus protocol


The repeater makes it possible to extend the network by increasing the wireless range, collecting the data of the relevant distribution units, and then transmitting them to the Concentrator.

230V AC power supply.

RPT 001 Signal repeater for distribution system




KMF ...

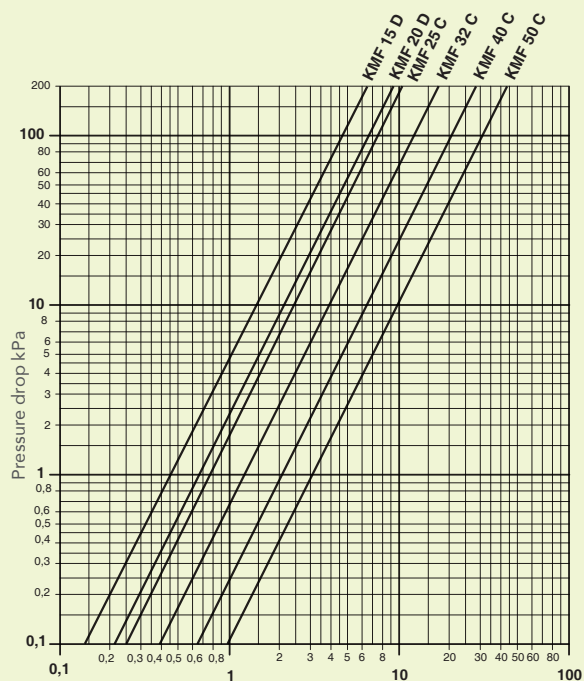


Pressure drop

KU ...

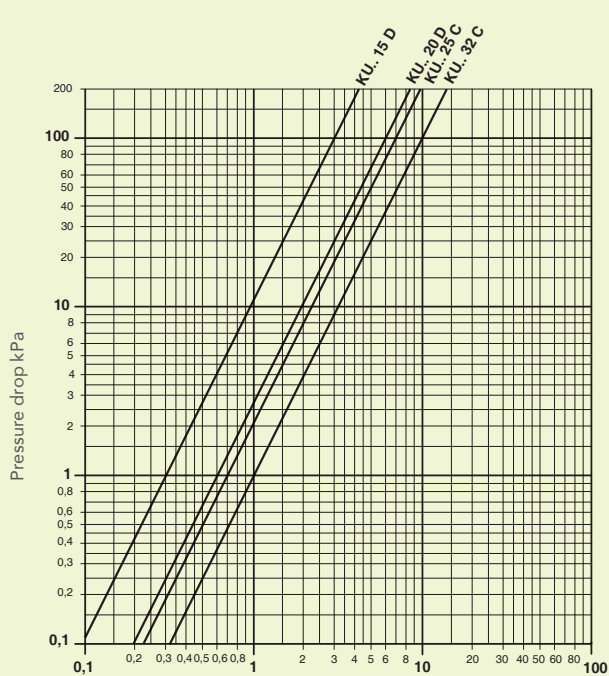


KWP ...

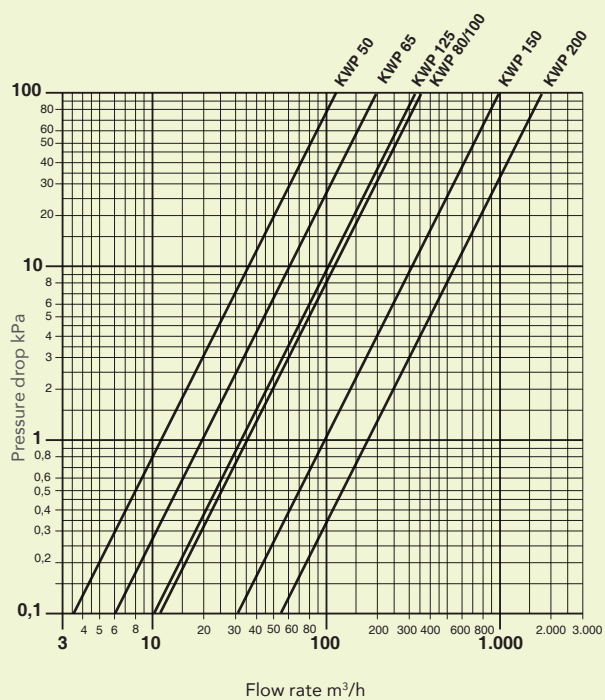


Pressure drop

KWM ...

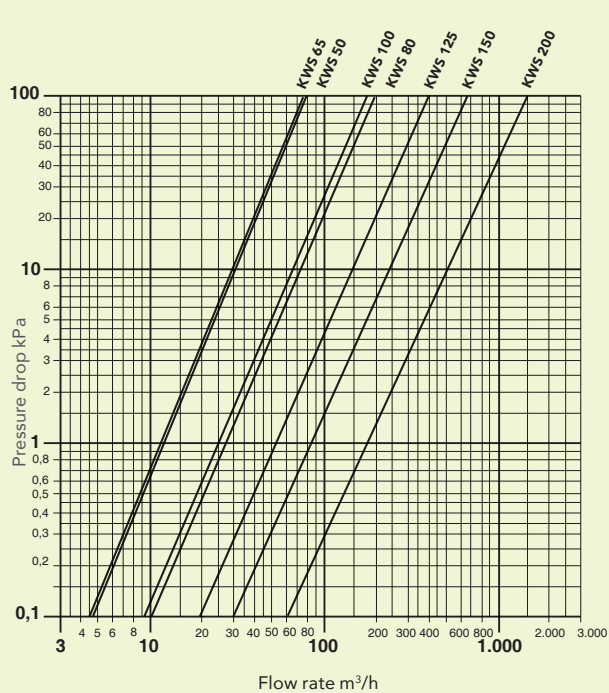


KMHG ... - KNHF ...

Pressure drop


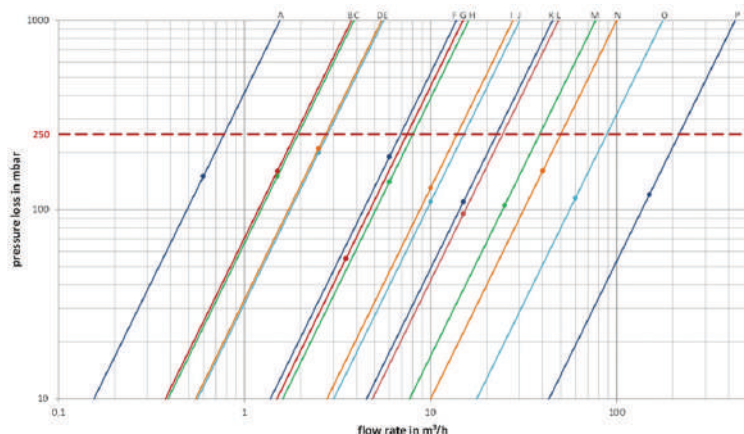


Qp m³/h	DN connection	Reference diagram
0,6	G ¾	A
1,5	G ¾	C
2,5	G 1	E
3,5	G 1 ¼	G
6	G 1 ¼	H
10,0	G 2	J
3,5	DN 25	G
6	DN 25	H
10	DN 40	I
15	DN 50	K
25	DN 65	M
40	DN 80	N
60	DN 100	O



KBHF ...

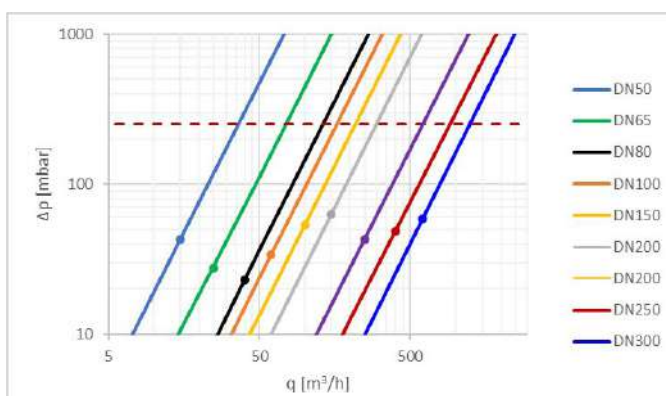





MHR-MHF-MHN ...

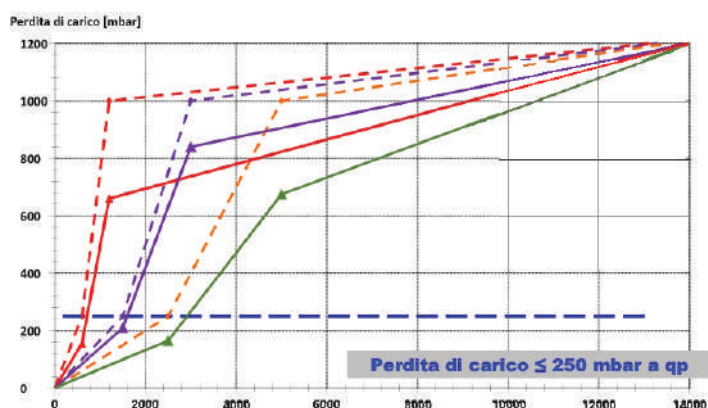

UHR-UHF-UHN-UHM ...

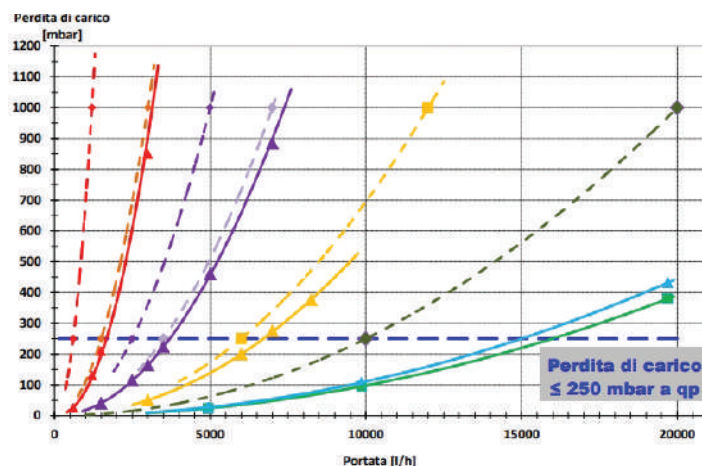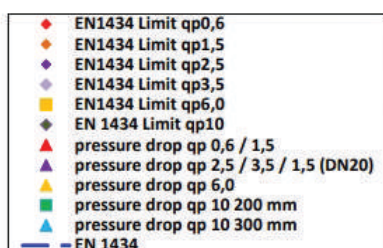

DISTRIBUTION BOXES" system

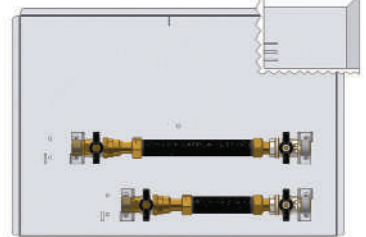

FOR MODEL SELECTION AND QUOTATIONS CONTACT YOUR LOCAL RETAILER

COMMUNICATION PROTOCOLS



BME 350 Pre-installation metal box for MME 350 module

PME 350 Pre-installation metal plate for MME 350 module

MME 350 Single zone distribution and metering module with 2- or 3-way zone valve.

Possibility of heating/cooling line:

- 1/2" routing; and 3/4" connection; (MME 350-5000)
- 3/4" routing; and 1" connection; male (MME 350 6000)

Consumption metering:

- No. 1 cthermal and cooling energy meter

Power supply: 230 Volt~ (MME 500...); 24 Volt~ (MME 500.../24V)

Bus for centralised reading and C-Bus or M-Bus remote control

NOTE: Ensure a head of at least 2.5 metres of water column at the box inlet, generated by the primary circuit pump (boiler/cooler circuit).

NOTE: with a simple gesture, in all models, it is possible to change the side of the fluid inlet (from LH to RH and vice versa).

M	M	E	3	5	0	-	x	0	0	0	/	x	x	x
PME	wall mounting plate	1	m3-way module with 3/4" automatic balancing valve (0.9 m ³)	0	without water	S	left							
MME	module	2	3-way module with 1" automatic balancing valve (1.7 m ³)	0	without domestic cold water	D	right							
BME	flush mounting box	5	2-way module with 3/4" automatic balancing valve (0.9 m ³)	0	without domestic hot water	MU	M-Bus turbine counter M-Bus ultrasonic room counter							
		6	2-way module with 1" automatic balancing valve (1.7 m ³)			W	wireless M-Bus counter							
												R	room thermostat radio status receiver	

Example

mandatory fields *optional fields*

MME 350-5 0 0 0 / D M R — radio receiver

module

right


without grey water

without domestic cold water

without domestic hot water

2-way module"

M-Bus meter

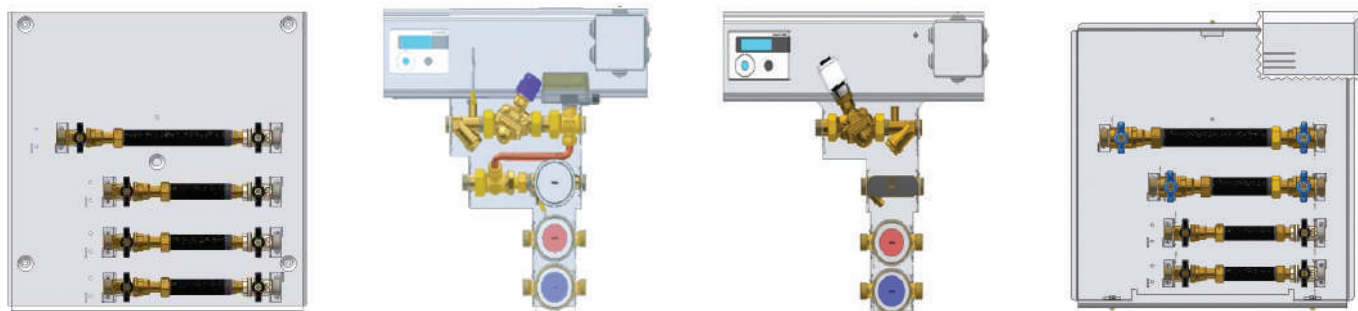

FOR MODEL SELECTION AND QUOTATIONS CONTACT YOUR LOCAL RETAILER

BME 500 Pre-installation metal box for MME 500 module

PME 500 Pre-installation metal plate for MME 500 module

MME 500 Single zone distribution and metering module with 2-way or 3-way zone valve

COMMUNICATION
PROTOCOLS

M-Bus

Heating/cooling line possible:

- 1/2" routing; and 3/4" connection; (MME 500-5xx0)
- 3/4" routing; and 1" connection; male (MME 500 6xx0)

Possibility of domestic hot and/or cold water lines:

- Domestic hot and/or cold water lines 1/2" routing; and 3/4" connection; male, 2.5 m³/h volumetric counters (MME 500-x110)
- Domestic hot and/or cold water lines 3/4" routing; and 1" connection; male, 4 m³/h volumetric counters (MME 500-x220)

Consumption metering:

- No. 1 thermal and cooling energy meter
- No. 2 cm³ domestic water meter

Power supply: 230 Volt~ (MME 500...); 24 Volt~ (MME 500.../24V)

Bus for centralised reading and C-Bus or M-Bus remote control

NOTE: Ensure a head of at least 2.5 metres of water column at the box inlet, generated by the primary circuit pump (boiler/cooler circuit).

NOTE: With a simple gesture, in all models, it is possible to change the side of the fluid inlet (from LH to RH and vice versa).

M	M	E	5	0	0	-	x	x	x	0	/	x	x	x			
BME flush mounting box	MME module	PME wall mounting plate	1 3-way module with 3/4" (0.9 m³) automatic balancing valve	5 2-way module with 3/4" (0.9 m³) automatic balancing valve	6 2-way module with 1" (1.7 m³) automatic balancing valve	0 without domestic hot water	1 with domestic hot water 2.5 m³ 3/4"	2 with domestic hot water 4m³ 1"	0 without domestic cold water	1 with domestic cold water 2.5 m³ 3/4"	2 with domestic cold water 4 m³ 1"	S left	D right	M M-Bus turbine counter	U M-Bus ultrasonic room counter	W wireless M-Bus counter	R room thermostat radio status receiver
Example MME 500-5 0 0 0 / D M R mandatory fields: module, 2-way module, without grey water, without domestic cold water, without domestic hot water optional fields: right, M-Bus meter, radio receiver																	



PRODUCTS

FIELD DEVICES



DOMESTIC HOT WATER MIXING

COMMUNICATION PROTOCOL





COMMUNICATION
PROTOCOLS



MAS 6../T


ELECTRONIC MIXING VALVES FOR DHW WITH
REMOTE MONITORING OPTION

FROM 1/2" TO 1"1/4

MAS 7../T

ELECTRONIC MIXING VALVES FOR DHW WITH REMOTE
METERING OPTION FROM 1"1/2 TO 2"

Compact unit suitable for fixed-point temperature control in domestic hot water
distribution circuits remote control option via ModBus.

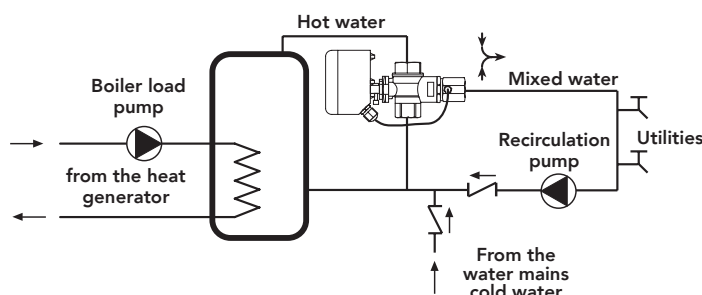

	DN		Flow rate l/min ⁽¹⁾	Kvs m ³ /h ⁽²⁾	Setting range
	Inches	mm			
MAS 615/T	1/2"	15	40	2.5	30 ... 70 °C
MAS 620/T	3/4"	20	70	5	30 ... 70 °C
MAS 625/T	1"	25	130	9	30 ... 70 °C
MAS 632/T	1"1/4	32	180	13.5	30 ... 70 °C
MAS 740/T	1"1/2	40	270	19.2	30 ... 70 °C
MAS 750/T	2"	50	390	28.9	30 ... 70 °C

ACCESSORIES FOR ALL MODELS

TMT 500

Additional sealing component for MAS 615/T, which
can be installed without removing the valve from the
hydraulic system.

This sealing component is treated as a spare part

TMT 600

Additional sealing component for MAS 620/T...632/T,
which can be installed without removing the valve from
the hydraulic system. This sealing component is treated
as a spare part

TMT 700

Additional sealing component for MAS 7../T, which
can be installed without removing the valve from the
hydraulic system.

This sealing component is treated as a spare part

(1) Flow rate at an average pressure of
4 bar and a pressure drop of approx.
20%.

(2) Flow coefficient in m³ with valve open
with a pressure drop of 100 KPa.

COMMUNICATION
PROTOCOLS


MAS 6../T/AL

ELECTRONIC MIXING VALVES FOR DHW WITH
ANTILEGIONELLA FUNCTION
AND REMOTE MONITORING OPTION
FROM 1/2" TO 1"1/4

MAS 7../T/AL

ELECTRONIC MIXING VALVES FOR DHW WITH
ANTILEGIONELLA FUNCTION AND
REMOTE MONITORING OPTION
FROM 1"1/2 TO 2"

Compact unit suitable for adjusting the fixed-point temperature in domestic hot water distribution circuits with antilegionella function and remote control option via ModBus. It can be integrated into the system

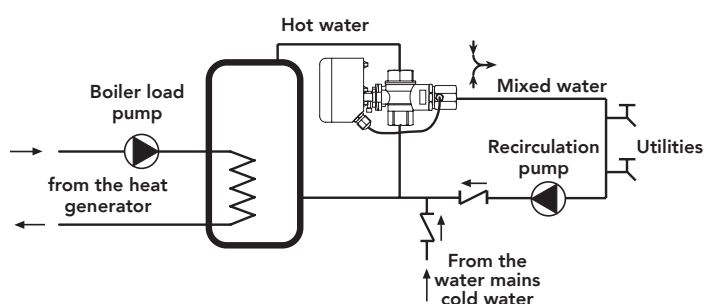

	DN		Flow rate	Kvs	Setting range
	Inches	mm	l/min ⁽¹⁾	m ³ /h ⁽²⁾	
MAS 615/T/AL	1/2"	15	40	2.5	30 ... 70 °C
MAS 620/T/AL	3/4"	20	70	5	30 ... 70 °C
MAS 625/T/AL	1"	25	130	9	30 ... 70 °C
MAS 632/T/AL	1"1/4	32	180	13.5	30 ... 70 °C
MAS 740/T/AL	1"1/2	40	270	19.2	30 ... 70 °C
MAS 750/T/AL	2"	50	390	28.9	30 ... 70 °C

ACCESSORIES FOR ALL MODELS

TMT 500 Additional sealing component for MAS 615/T, which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part

TMT 600 Additional sealing component for MAS 620/T...632/T, which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part

TMT 700 Additional sealing component for MAS 7../T, which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part

(1) Flow rate at an average pressure of 4 bar and a pressure drop of approx. 20%.

(2) Flow coefficient in m³ with valve open with a pressure drop of 100 KPa.




MAS 6..

ELECTRONIC MIXING VALVES FOR DHW
FROM 1/2" TO 1"1/4

MAS 7..

ELECTRONIC MIXING VALVES FOR DHW
FROM 1"1/2 TO 2"

Compact unit suitable for fixed-point temperature control in domestic hot water distribution circuits.

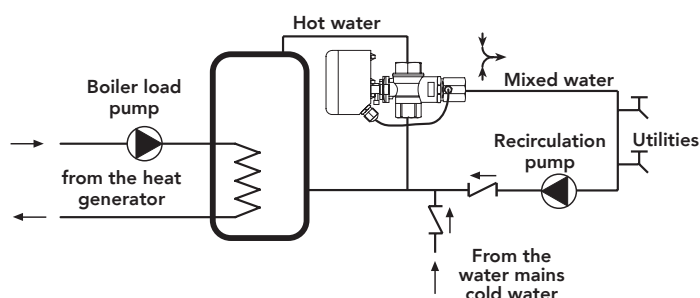

	DN		Flow rate	Kvs	Setting range
	inches	mm	l/min ⁽¹⁾	m ³ /h ⁽²⁾	
MAS 615	1/2"	15	40	2.5	30 ... 70 °C
MAS 620	3/4"	20	70	5	30 ... 70 °C
MAS 625	1"	25	130	9	30 ... 70 °C
MAS 632	1"1/4	32	180	13.5	30 ... 70 °C
MAS 740	1"1/2	40	270	19.2	30 ... 70 °C
MAS 750	2"	50	390	28.9	30 ... 70 °C

ACCESSORIES FOR ALL MODELS

- TMS 500** Additional sealing component for MAS 615, which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part
- TMS 600** Additional sealing component for MAS 620...632, which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part
- TMS 700** Additional sealing component for MAS 7.., which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part

(1) Flow rate with an average pressure of 4 bar and a pressure drop of approx. 20%

(2) Flow coefficient in m³ with open valve with pressure drop of 100 KPa




MAS 6..AL

ELECTRONIC MIXING VALVES FOR DHW
WITH ANTILEGIONELLA FUNCTION
FROM 1/2" TO 1"1/4

MAS 7..AL

ELECTRONIC MIXING VALVES FOR DHW
WITH ANTILEGIONELLA FUNCTION
FROM 1"1/2 TO 2"

Compact unit suitable for fixed-point temperature control in domestic hot water distribution circuits, with anti-legionella function and open manifold output.

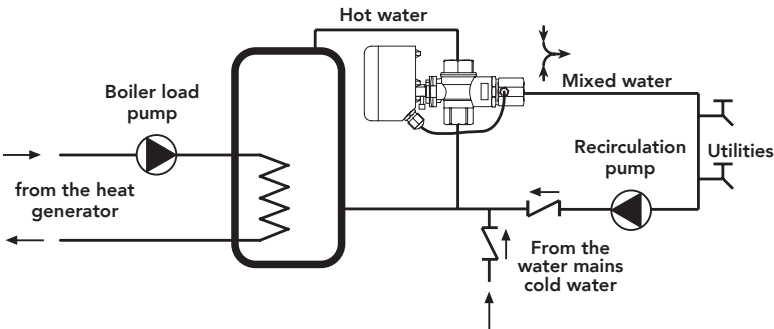

	DN		Flow	Kvs	Setting
	inches	mm	rate	m ³ /h ⁽²⁾	range
			l/min ⁽¹⁾		
MAS 615/AL	1/2"	15	40	2.5	30 ... 70 °C
MAS 620/AL	3/4"	20	70	5	30 ... 70 °C
MAS 625/AL	1"	25	130	9	30 ... 70 °C
MAS 632/AL	1"1/4	32	180	13.5	30 ... 70 °C
MAS 740/AL	1"1/2	40	270	19.2	30 ... 70 °C
MAS 750/AL	2"	50	390	28.9	30 ... 70 °C

ACCESSORIES FOR ALL MODELS

IPS 328	Device for generating 2 alarms through open manifold contact
TMS 500	Additional sealing component for MAS 615, which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part
TMS 600	Additional sealing component for MAS 620...632, which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part
TMS 700	Additional sealing component for MAS 7.., which can be installed without removing the valve from the hydraulic system. This sealing component is treated as a spare part

(1) Flow rate with an average pressure of 4 bar and a pressure drop of approx. 20%

(2) Flow coefficient in m3 with open valve with pressure drop of 100 KPa



GAS SAFETY

COMMUNICATION PROTOCOL





PROTOCOLLI
DI COMUNICAZIONE



RFG 442 - 448

GAS LEAK DETECTOR WITH UP TO 3 REMOTE SENSORS FOR CENTRAL HEATING PLANT OR SIMILAR

Suitable for detecting methane, LPG or CO leaks.

Capable of serving up to 3 external methane, LPG or CO sensors.

4 relay outputs for controlling gas shut-off valves and/or alarms.

In 4 DIN rail module case

ESSENTIAL SENSORS: 1 sensor for methane, LPG or carbon monoxide CO.

RFG 442 Gas leak detector for up to 3 remote sensors 12V...24V AC

RFG 448 Gas leak detector for up to 3 remote sensors 230V AC

RELATED PRODUCTS

SRD 150 Civil wall-mounting methane gas sensor

SRD 250 Civil wall-mounting LPG gas sensor


SRS 150 Wall-mounting methane gas sensor for Central heating plant

SRS 250 Wall-mounting LPG gas sensor for Central heating plant

SRS 350 Wall-mounting CO gas sensor for Central heating plant

System architecture

For gas leak detection alarm acquisition.

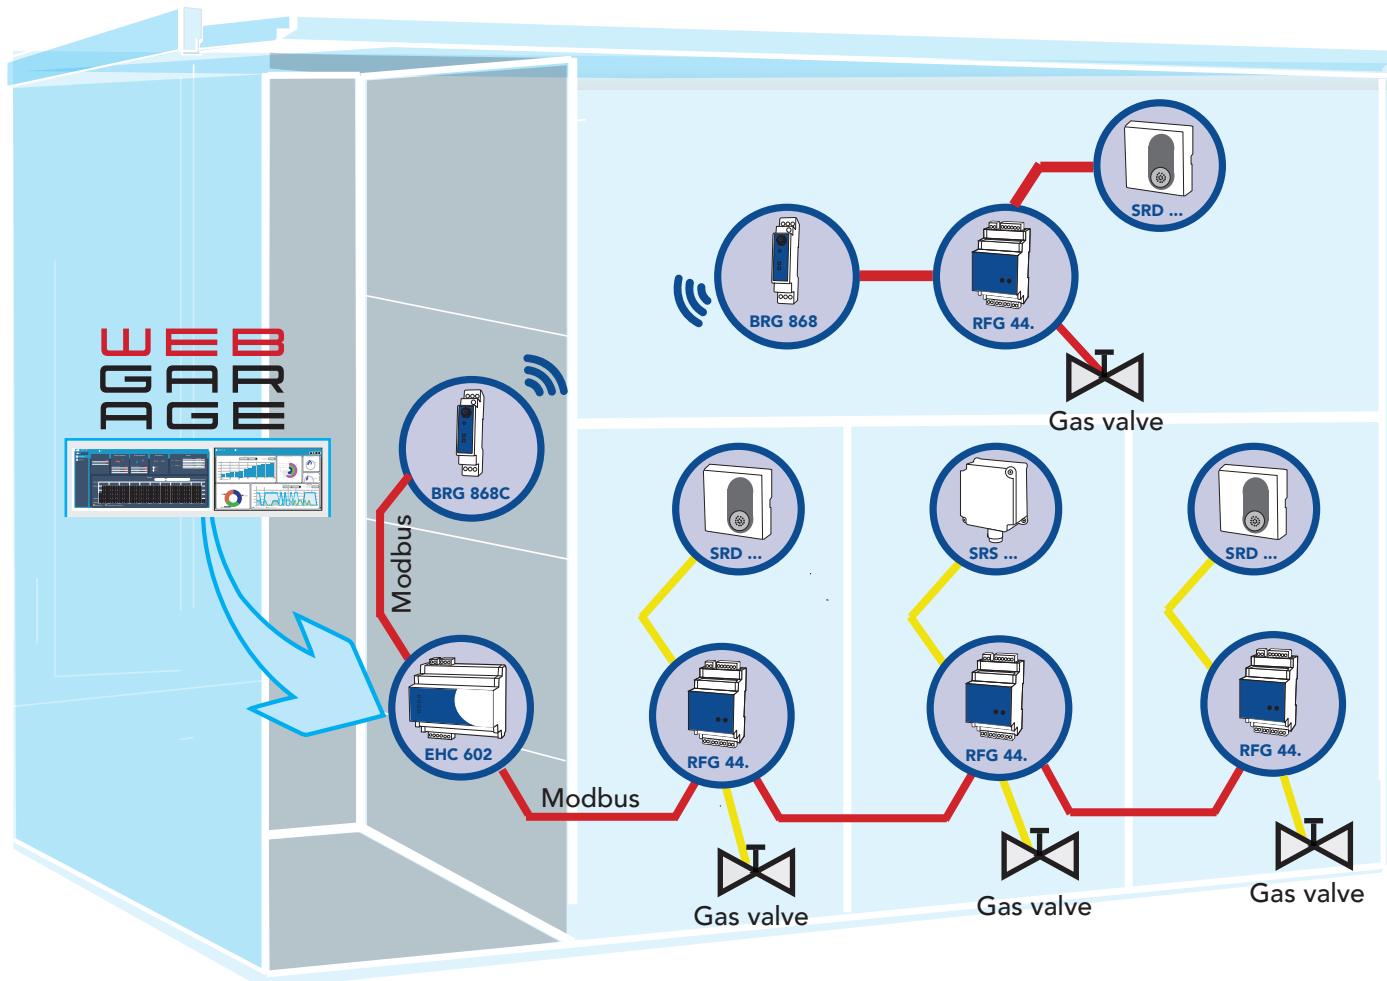



"DOMOGAS" gas leak detectors for domestic use



DGD 1..2..

DOMESTIC GAS LEAK DETECTORS WITH RELAY OUTPUT

Suitable for detecting methane or LPG gas leaks with the possibility of controlling a solenoid valve (N.C. or N.O.).

Interchangeable pre-calibrated sensor..

The detectors comply with CEI EN 50194-1 standards and carry the IMQ quality mark.

DGD 118 Methane gas leak detector

DGD 218 LPG gas leak detector



DGD 14.-24.

DOMESTIC GAS LEAK DETECTORS COMPLETE WITH N.O. (NORMALLY OPEN) VALVE WITH MANUAL RESET

These are gas leak detectors, for methane or LPG, complete with gas valve, NORMALLY OPEN, with manual reset at 230V AC.

Interchangeable pre-calibrated sensor.

The detectors comply with CEI EN 50194-1 standards and carry the IMQ quality mark.

DGD 148.15 Methane gas leak detector with 1/2" valve (GARO 815)

DGD 148.20 Methane gas leak detector with 3/4" valve (GARO 820)

DGD 148.25 Methane gas leak detector with 1" valve
(GARO 825)

DGD 248.15 LPG gas leak sensor with 1/2" valve
(GARO 815)

DGD 248.20 LPG gas leak sensor with 3/4" valve (GARO 820)

DGD 248.25 LPG gas leak sensor with 1" valve (GARO 825)



DGD 318

DOMESTIC CO (CARBON MONOXIDE) WITH STORAGE AND RELAY OUTPUT

Carbon monoxide detector, with the ability to directly control solenoid valves, valves and other 230V AC actuators.

The detector complies with CEI EN 50291-1.

DGD 318 CO (carbon monoxide) detector with relay output



ACC ...

BATTERIES

Long-life sealed rechargeable batteries.

They withstand heavy operating conditions such as overcharging and very low discharge.

They are maintenance-free.

	Power VA	Voltage V DC	Ampere capacity per hour	Dimensions LxPxH	Weight Kg
ACC 019	25	12	2.3	178x34x65	0.9
ACC 060	77	12	7.0	151x64.5x97.5	2.5
ACC 150	180	12	17	181x76x167	6
ACC 240	260	12	24	175x166x125	8.1
ACC 400	480	12	40	197x165x170	14

Method of choosing power supply according to the system to be energised

- Calculate the total power absorbed P_t in VA in the system to be powered by adding up all the consumption values of the individual system components: detectors P_r , sensors P_s (SRS only ...), valves P_v , external alarms P_a .

The absorption values of the SGC, SGR sensors do not have to be taken into account as they are already calculated in the detectors powering them.

$P_t = P_r + P_s + P_v + P_a$. The power supply must be greater than or equal to P_t .

- Multiply the power absorbed P_t by the number of hours h you want to keep the system running without mains supply, and the effective power P_e required is obtained.

$P_e = P_t \times h$. The power of the battery must not be less than P_e .

If a single battery is not sufficient, use two or more batteries in parallel.



AL.

BACK UP POWER UNIT FOR GAS SAFETY SYSTEM

Used to supply 12 V DC power to gas safety systems even in the event of a mains power failure.

Composed of:

- 1 stabilised back-up power supply unit.
- 1 watertight accumulator.

STABILISED POWER BACK UP UNITS

Stabilised back-up units for keeping batteries charged

	Power VA	Input V AC	Output V DC	ampere	Dimensions LxPxH	Weight Kg
ALI 310	30	230	13.8	2.25	130x100x38	0.5
ALP 114	90	230	13.8	6.75	200x260x110	6.7
ALP 120	120	230	13.8	9	185x290x130	8



GENERAL ACCESSORIES FOR GAS DETECTION SYSTEM

SAS 880	Remote audible alarm
SAL 881	Remote visual alarm
CSL 882	Remote visual and audible alarm



GCAO ...

NORMALLY CLOSED GAS SOLENOID VALVE WITH BRASS BODY

Without power supply they are closed, with power supply they are open.
Class A Group 2 approval.

	DN	Power supply		P max ⁽¹⁾	Flow rate m ³ /h ⁽²⁾	
		V	VA	mbar	0.5 m ³ /h	1 mbar
GCAO 210	3/8"	12 V DC	8.5	200	0.92	1.4
GCAO 410	3/8"	24 V AC	7	200	0.92	1.4
GCAO 810	3/8"	230 V AC	9	200	0.92	1.4
GCAO 215	1/2"	12 V DC	8.5	200	0.92	1.4
GCAO 415	1/2"	24 V AC	7	200	0.92	1.4
GCAO 815	1/2"	230 V AC	9	200	0.92	1.4
GCAO 220	3/4"	12 V DC	8.5	200	0.92	1.4
GCAO 820	3/4"	230 V AC	9	200	0.92	1.4
GCAO 420	3/4"	24 V AC	7	200	0.92	1.4

(1) Maximum operating pressure

(2) Natural gas flow rates with 0.5 mbar pressure drop (5 mm CA) and 1 mbar (10 mm WG) 100 mbar=10kPa=1,000 mmWG



GCRO ...

NORMALLY CLOSED GAS SOLENOID VALVES WITH MANUAL RESET AND BRASS BODY

With no power supply they are closed, they are open with manual reset and remain open only when powered.

Class A Group 2 approval.

	DN	Power supply V	VA	P max ⁽¹⁾ mbar	Flow rate m ³ /h ⁽²⁾	
					0.5 m ³ /h	1 mbar
GCRO 215	1/2"	12 V DC	8	500	1.8	2.6
GCRO 415	1/2"	24 V AC	8	500	1.8	2.6
GCRO 815	1/2"	230 V AC	9	500	1.8	2.6
GCRO 220	3/4"	12 V DC	8	500	3	4.5
GCRO 420	3/4"	24 V AC	8	500	3	4.5
GCRO 820	3/4"	230 V AC	9	500	3	4.5
GCRO 225	1"	12 V DC	8	500	4.5	6.6
GCRO 425	1"	24 V AC	8	500	4.5	6.6
GCRO 825	1"	230 V AC	9	500	4.5	6.6



GARO ...

NORMALLY OPEN GAS SOLENOID VALVES WITH MANUAL RESET AND BRASS BODY

With no power supply they are open, with power supply they are closed
They open with a manual reset and remain open only if there is no power supply.

	DN	Power supply V	VA	P max ⁽¹⁾ mbar	Flow rate m ³ /h ⁽²⁾	
					0.5 m ³ /h	1 mbar
GARO 215	1/2"	12 V DC	6	500	1.8	2.6
GARO 415	1/2"	24 V AC	4	500	1.8	2.6
GARO 815	1/2"	230 V AC	7	500	1.8	2.6
GARO 220	3/4"	12 V DC	6	500	3	4.5
GARO 420	3/4"	24 V AC	4	500	3	4.5
GARO 820	3/4"	230 V AC	7	500	3	4.5
GARO 225	1"	12 V DC	8	500	4.5	6.6
GARO 425	1"	24 V AC	22	500	4.5	6.6
GARO 825	1"	230 V AC	8	500	4.5	6.6

(1) Maximum operating pressure

(2) Natural gas flow rates with 0.5 mbar pressure drop (5 mm WG) and 1 mbar (10 mm WG)
100 mbar=10kPa=1,000 mmWG



GCR ...

NORMALLY CLOSED GAS SOLENOID VALVE WITH MANUAL RESET AND ALUMINUM BODY

With no power supply they are closed, they are open with manual reset and remain open only when powered. Class A Group 2 approval



THREADED	DN	Power supply		P max ⁽¹⁾ mbar	flow rate m ³ /h ⁽²⁾	
		V	VA		0.5 m ³ /h	1 mbar
GCR 215	1/2"	12 V DC	8	500	6.6	8.7
GCR 415	1/2"	24 V AC	8	500	6.6	8.7
GCR 815	1/2"	230 V AC	9	500	6.6	8.7
GCR 220	3/4"	12 V DC	8	500	9.8	14
GCR 420	3/4"	24 V AC	8	500	9.8	14
GCR 820	3/4"	230 V AC	9	500	9.8	14
GCR 225	1"	12 V DC	8	500	15	19
GCR 425	1"	24 V AC	8	500	15	19
GCR 825	1"	230 V AC	9	500	15	19
GCR 232	1 1/4"	12 V DC	8	500	18	27
GCR 432	1 1/4"	24 V AC	8	500	18	27
GCR 832	1 1/4"	230 V AC	9	500	18	27
GCR 240	1 1/2"	12 V DC	8	500	20	30
GCR 440	1 1/2"	24 V AC	8	500	20	30
GCR 840	1 1/2"	230 V AC	9	500	20	30
GCR 250	2"	12 V DC	8	500	25	37
GCR 450	2"	24 V AC	8	500	25	37
GCR 850	2"	230 V AC	9	500	25	37

(1) Maximum operating pressure

(2) Natural gas flow rates with 0.5 mbar pressure drop (5 mm WG) and 1 mbar (10 mm WG)
100 mbar=10kPa=1,000 mmWG



GCR ...

NORMALLY CLOSED

GAS SOLENOID VALVES

WITH MANUAL RESET

With no power supply they are closed, they are open with manual reset and remain open only when powered. Class A Group 2 approval

(1) Maximum operating pressure

(2) Natural gas flow rates with 0.5 mbar pressure drop (5 mm CA) and 1 mbar (10 mm WG)
100 mbar=10kPa=1,000 mmWG

FLANGED	DN	Power supply		P max ⁽¹⁾ mbar	Flow rate m ³ /h ⁽²⁾	
		V	VA		0. m ³ /h	1 mbar
GCR 265	65	12 V DC	18	500	53	78
GCR 465	65	24 V AC	20	500	53	78
GCR 865	65	230 V AC	18	500	53	78
GCR 280	80	12 V DC	18	500	53	78
GCR 480	80	24 V AC	20	500	53	78
GCR 880	80	230 V AC	18	500	53	78
GCR 2100	100	12 V DC	18	500	83	130
GCR 4100	100	24 V AC	20	500	83	130
GCR 8100	100	230 V AC	18	500	83	130
GCR 2125	125	12 V DC	18	500	230	335
GCR 4125	125	24 V AC	20	500	230	335
GCR 8125	125	230 V AC	18	500	230	335
GCR 2150	150	12 V DC	18	500	230	335
GCR 4150	150	24 V AC	20	500	230	335
GCR 8150	150	230 V AC	18	500	230	335
GCR 2200	200	12 V DC	18	500	360	525
GCR 4200	200	24 V AC	20	500	360	525
GCR 8200	200	230 V AC	18	500	360	525
GCR 2300	300	12 V DC	18	500	800	1,200
GCR 4300	300	24 V AC	20	500	800	1,200
GCR 8300	300	230 V AC	18	500	800	1,200

SPECIAL VERSION

GCR .../C Complete with closing indicator microswitch kit

ACCESSORIES

FCR 65-80 Closing indicator microswitch kit for GCR solenoid valves GCR DN 65-80

FCR 100-125-150 Closing indicator microswitch kit for GCR DN 100-125-150 solenoid valve

FCR 200 Closing indicator microswitch kit for GCR solenoid valves GCR DN 200



GAR ...

NORMALLY OPEN

GAS SOLENOID VALVES

WITH MANUAL RESET

With no power supply they are open, with power supply they are closed.
They open with a manual reset and remain open only if there is no power supply.



THREADED	DN	Power supply		P max ⁽¹⁾ mbar	Flow rate m ³ /h ⁽²⁾	
		V	VA		0.5 m ³ /h	1 mbar
GAR 232	1 1/4"	12 V DC	20	500	20	29
GAR 432	1 1/4"	24 V AC	22	500	20	29
GAR 832	1 1/4"	230 V AC	23	500	20	29
GAR 240	1 1/2"	12 V DC	20	500	20	29
GAR 440	1 1/2"	24 V AC	22	500	20	29
GAR 840	1 1/2"	230 V AC	23	500	20	29
GAR 250	2"	12 V DC	20	500	25	37
GAR 450	2"	24 V AC	22	500	25	37
GAR 850	2"	230 V AC	23	500	25	37

⁽¹⁾ Maximum operating pressure

⁽²⁾ Natural gas flow rates with 0.5 mbar
pressure drop (5 mm WG) and 1 mbar
(10 mm WG)
100 mbar=10kPa=1,000 mmWG



GAR ...

NORMALLY OPEN

GAS SOLENOID VALVES

WITH MANUAL RESET

With no power supply they are open, with power supply they are closed.

They open with a manual reset and remain open only if there is no power supply.

FLANGED	DN	Power supply		P max ⁽¹⁾ mbar	Flow rate m ³ /h ⁽²⁾	
		V	VA		0.5 m ³ /h	1 mbar
GAR 265	65	12 VDC	20	500	63	92
GAR 465	65	24 VAC	22	500	63	92
GAR 865	65	230 VAC	23	500	63	92
GAR 280	80	12 VDC	20	500	76	115
GAR 480	80	24 VAC	22	500	76	115
GAR 880	80	230 VAC	23	500	76	115
GAR 2100	100	12 VDC	20	500	92	140
GAR 4100	100	24 VAC	22	500	92	140
GAR 8100	100	230 VAC	23	500	92	140
GAR 2125	125	12 VDC	20	500	275	400
GAR 4125	125	24 VAC	22	500	275	400
GAR 8125	125	230 VAC	23	500	275	400
GAR 2150	150	12 VDC	20	500	275	400
GAR 4150	150	24 VAC	22	500	275	400
GAR 8150	150	230 VAC	23	500	275	400
GAR 2200	200	12 VDC	40	500	360	525
GAR 4200	200	24 VAC	45	500	360	525
GAR 8200	200	230 VAC	57	500	360	525
GAR 2300	300	12 VDC	40	500	790	1,200
GAR 4300	300	24 VAC	45	500	790	1,200
GAR 8300	300	230 VAC	57	500	790	1,200

⁽¹⁾ Maximum operating pressure

⁽²⁾ Natural gas flow rates with 0.5 mbar pressure drop (5 mm WG) and 1 mbar (10 mm WG)
100 mbar=10kPa=1,000 mmWG

**OPTIONS:**

The following versions are
also available: **DN 250 / DN
300**

(1) Maximum operating pressure

(2) Natural gas flow rates with 0.5 mbar
pressure drop (5 mm WG) and 1 mbar
(10 mm WG)
100 mbar=10kPa=1,000 mmWG

(3) Starting power consumption

(4) Complete with closing indicator
microswitch

GCA ...

AUTOMATIC NORMALLY CLOSED GAS SOLENOID VALVES AND ALUMINUM BODY

With no power supply they are closed, with power supply they are open.

Class A Group 2 approval.

DN 250 and 300 Class B Group 2 approval.

THREADED	DN	Power supply		P max ⁽¹⁾ mbar	Flow rate m ³ /h ⁽²⁾	
		V	VA		0.5 m ³ /h	1 mbar
GCA 215	1/2"	12 V DC	16	200	3.5	5
GCA 415	1/2"	24 V AC	14	200	3.5	5
GCA 815	1/2"	230 V AC	18	200	3.5	5
GCA 220	3/4"	12 V DC	16	200	4.8	7
GCA 420	3/4"	24 V AC	14	200	4.8	7
GCA 820	3/4"	230 V AC	18	200	4.8	7
GCA 225	1"	12 V DC	6/23 ⁽³⁾	200	6	8.8
GCA 425	1"	24 V AC	7/24 ⁽³⁾	200	6	8.8
GCA 825	1"	230 V AC	9/30 ⁽³⁾	200	6	8.8
GCA 432	1 1/4"	24 V AC	18/68 ⁽³⁾	200	19	27
GCA 832	1 1/4"	230 V AC	25/89 ⁽³⁾	200	19	27
GCA 440	1 1/2"	24 V AC	18/68 ⁽³⁾	200	20	29
GCA 840	1 1/2"	230 V AC	25/89 ⁽³⁾	200	20	29
GCA 450	2"	24 V AC	18/68 ⁽³⁾	200	30	43
GCA 850	2"	230 V AC	25/89 ⁽³⁾	200	30	43
FLANGED						
GCA 465	65	24 V AC	50/185 ⁽³⁾	360	50	71
GCA 865	65	230 V AC	75/290 ⁽³⁾	360	50	71
GCA 480	80	24 V AC	50/185 ⁽³⁾	360	56	80
GCA 880	80	230 V AC	75/290 ⁽³⁾	360	56	80
GCA 4100	100	24 V AC	35/120 ⁽³⁾	360	90	137
GCA 8100	100	230 V AC	70/270 ⁽³⁾	360	90	137
GCA 4125	125	24 V AC	35/120 ⁽³⁾	360	180	255
GCA 8125	125	230 V AC	70/270 ⁽³⁾	360	180	255
GCA 4150	150	24V AC	35/120 ⁽³⁾	360	180	255
GCA 8150	150	230 V AC	70/270 ⁽³⁾	360	180	255
GCA 4200C ⁽⁴⁾	200	24 V AC	16/75 ⁽³⁾	360	380	550
GCA 8200C ⁽⁴⁾	200	230 V AC	19/66 ⁽³⁾	360	380	550
GCA 4250C ⁽⁴⁾	250	24 V AC	16/75 ⁽³⁾	360	570	950
GCA 8250C ⁽⁴⁾	250	230 V AC	19/66 ⁽³⁾	360	570	950
GCA 4300C ⁽⁴⁾	300	24 V AC	33/96 ⁽³⁾	360	900	1400
GCA 8300C ⁽⁴⁾	300	230 V AC	38/84 ⁽³⁾	360	900	1400

ACCESSORIES

FCM 15-20-25 Closure indicator microswitch kit for GCA DN 15-20-25

FCM 32-40 Closure indicator microswitch kit for GCA DN 32-40

FCM 50 Closure indicator microswitch kit for GCA DN 50

FCM 65-80 Closure indicator microswitch kit for GCA DN 65-80


FCM 100 Closure indicator microswitch kit for GCA DN 100

FCM 125-150 Closure indicator microswitch kit for GCA DN 125-150

FUNCTIONAL CHARACTERISTICS OF GAS SOLENOID VALVES


Type	Operation	Advantages	Disadvantages
Normally closed GCAO... GCA...	Without power supply it closes. With power supply it opens.	Ideal for heating plants. In the event of a gas leak, the detector cuts off the power supply to the valve. Power is only restored by manually resetting the detector. In the event of a power failure, the valve closes; when it resumes, the valve automatically reopens.	Not recommended in kitchens without a thermocouple. In the event of a power failure, the valve closes and the flame goes out; when power resumes, the valve reopens and the gas escapes, causing a dangerous situation.
Normally closed with manual reset GCRO... GCR...	Without power supply it closes. With power supply it opens only with manual action	Maximum safety in every use	Each time the power supply is interrupted, the valve closes. When power is restored, it must be reopened manually. Not suitable for kitchens because, in the event of a power failure, the user tends to reopen the valve by mechanical means. When power is resumed, the security system is no longer operational
Normally open with manual reset GARO ... GAR ...	With power supply it closes. Without power it opens only with manual action	In the kitchen, it allows gas to be used even in the event of a power supply failure. In the heating plant, in the event of a power failure, the valve remains open and the burner safety systems enter into operation. When power is restored, no manual intervention is required to restart the plant.	In the event of a power supply failure, the valve remains open and the gas safety system remains active only when powered by the buffer battery. They are not currently approved.

GCAO - GCRO - GARO VALVES

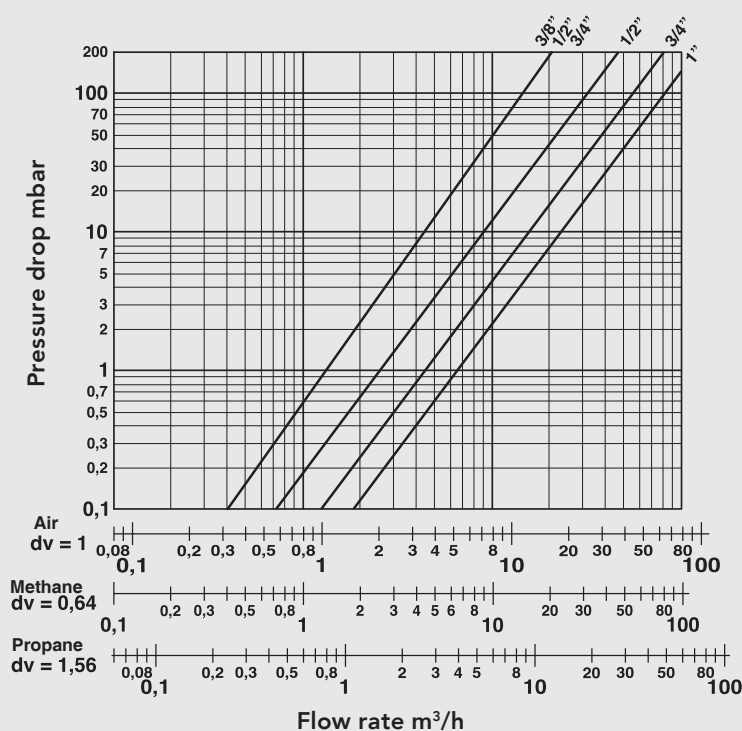




GCR

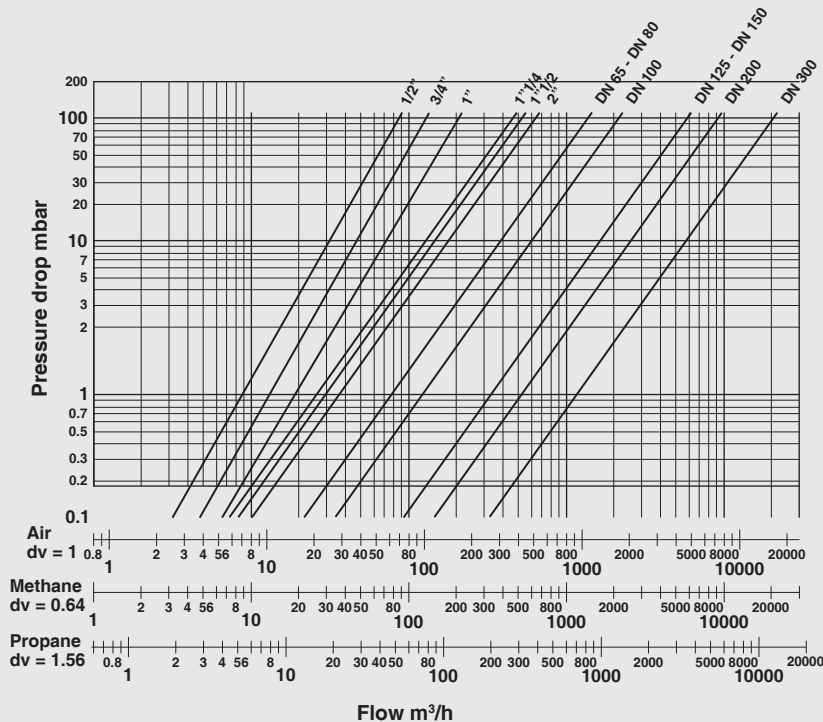


Pressure drop

GAR

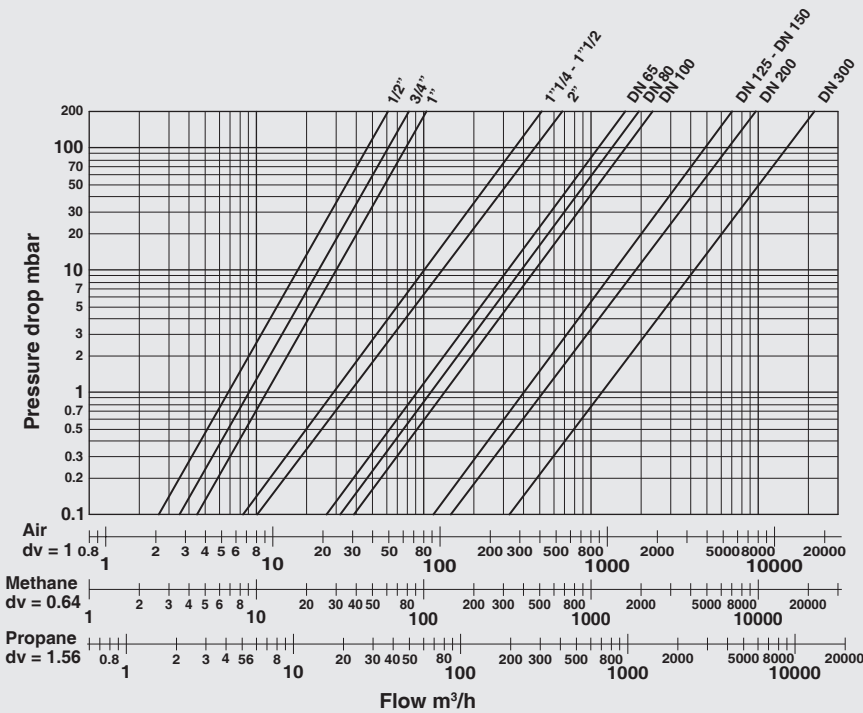


Pressure drop

100 mbar=10kPA=1.000 mmWG

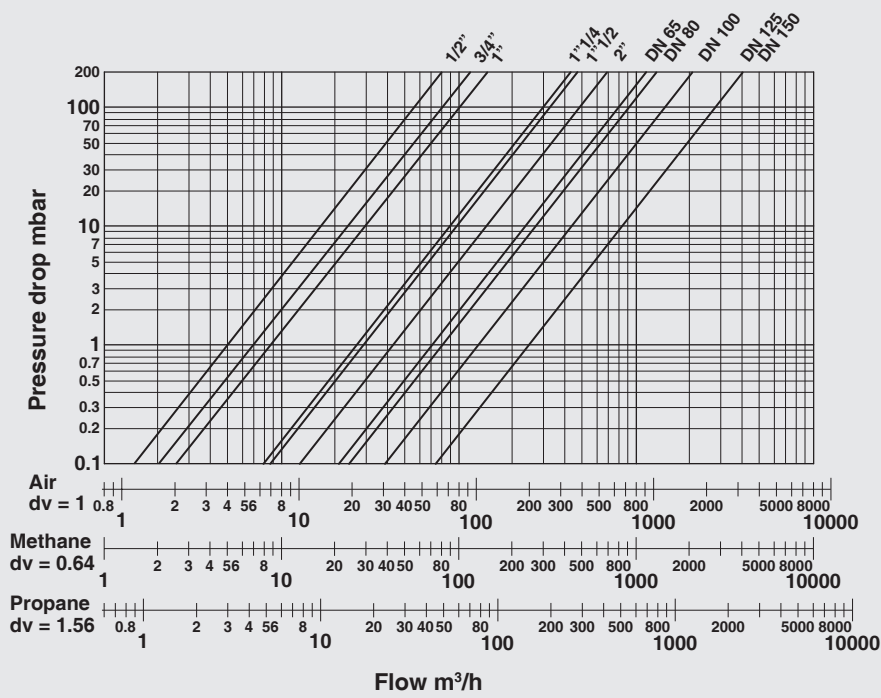

Pressure drop

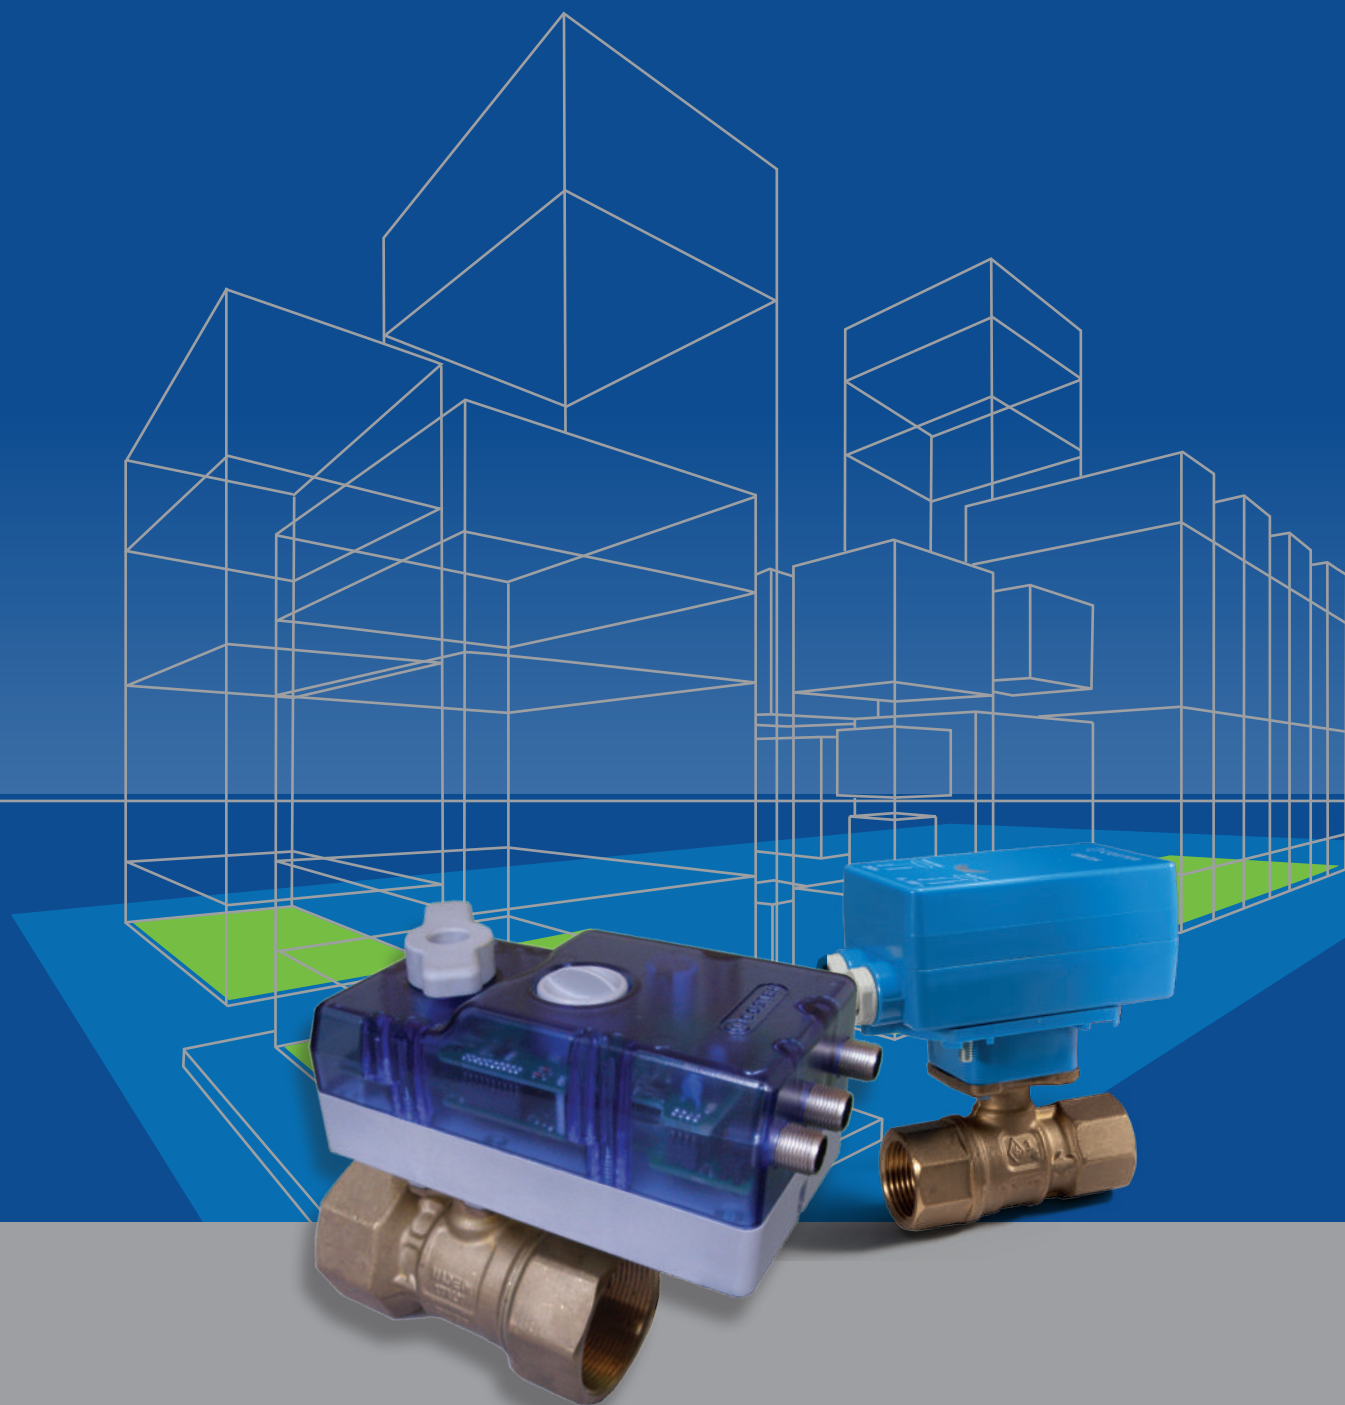

VALVES AND ACTUATORS

COMMUNICATION PROTOCOL





VFC ...

SHUTTER VALVES FOR 2, 3, 4 WAY FAN COILS
TO 3/4" MALE THREADED PN 16 (2...95 °C)

	DN body mm	DN male connections	Kvs ⁽¹⁾ m³/h direct	Suitable actuator ATC bar ⁽²⁾
2 WAY				
VFC 212	15	1/2"	0.63	1
VFC 213	15	1/2"	1.0	1
VFC 214	15	1/2"	1.6	1
VFC 235	20	3/4"	2.5	1
VFC 237	20	3/4"	3.5	1
VFC 238	25	1"	4.5	1
3 WAY				
VFC 312	15	1/2"	0.63	1
VFC 314	15	1/2"	1.6	1
VFC 335	20	3/4"	2.5	1
VFC 338	25	1"	4.5	1
4 WAY				
VFC 412	15	1/2"	0.63	1
VFC 413	15	1/2"	1.0	1
VFC 414	15	1/2"	1.6	1
VFC 435	20	3/4"	2.5	1
VFC 437	20	3/4"	3.5	1
VFC 438	25	1"	4.5	1

Unions are available upon request



ATC ...

ELECTRO-THERMAL LINEAR ACTUATORS FOR VFC VALVES

These are the motors used to automation of VFC-type valves.

Motor valve coupling adapter included (VA80)

The actuators are of the electro-thermal type and therefore they are released when the supply voltage fails. VFC valves are normally open. They close when the motor is mounted and there is no power supply.

(1) Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop. 100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp max. permitted by the actuator

	Power supply. 50/60Hz (W)	Control	Force N	Run time	Auxiliary end of run	valves VVFC DN
ATC 220	230 V (1W)	On-Off	100	5 min.	–	15-25
ATC 24	24 V (1W)	On-Off	100	5 min.	–	15-25
ATC 220S	2300 V (1W)	On-Off	100	5 min.	5 (230V 1A)	15-25
ATC 24S	24 V (1W)	On-Off	100	5 min.	3 (24V 1A)	15-25
ATC M24	24 V (1,4 W)	0÷10 V cc	100	5 min.	–	15-25



HGM - HMM ...

2, 3, 4 WAY ZONE BALL VALVES

PN 10 (5...90°C) UP TO 1"

	DN Body	Kvs ⁽¹⁾ - m³/h		Pipe connections		Suitable actuators			
		direct	angle			CDK 06.		SVK 014	
2 WAY		m³/h	m³/h	female	male	bar ⁽²⁾	sec ⁽³⁾	bar ⁽²⁾	sec ⁽³⁾
HGM 210	3/8"	5,4	–	3/8"	3/8"	6	60	–	–
HGM 215	1/2"	6	–	1/2"	1/2"	6	60	–	–
HGM 220	3/4"	11	–	3/4"	3/4"	6	60	–	–
HGM 225	1"	25,7	–	1"	1"	6	60	–	–
2 WAY		m³/h	m³/h	male	male	bar ⁽²⁾	sec ⁽³⁾	bar ⁽²⁾	sec ⁽³⁾
HMM 210	3/8"	5,4	–	3/8"	3/8"	6	60	6	60
HMM 215	1/2"	6	–	1/2"	1/2"	6	60	6	60
HMM 220	3/4"	11	–	3/4"	3/4"	6	60	6	60
HMM 225	1"	25,7	–	1"	1"	6	60	6	60
3 WAY				3 male		bar ⁽²⁾	sec ⁽³⁾	bar ⁽²⁾	sec ⁽³⁾
HMM 320	3/4"	11	3	3/4"		6	60	6	60
HMM 325	1"	25,7	6,5	1"		6	60	6	60
4 WAY				4 male		bar ⁽²⁾	sec ⁽³⁾	bar ⁽²⁾	sec ⁽³⁾
HMM 410	3/8"	5,4	1,3	3/8"		6	60	6	60
HMM 415	1/2"	6	1,5	1/2"		6	60	6	60
HMM 420	3/4"	11	3	3/4"		6	60	6	60

(1) Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop. 100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp max. permitted by the actuator

(3) sec: time required for the actuator to make the valve perform its full stroke



CDK ...

ACTUATORS FOR HGM..., HMM..., HGT VALVES

(1...95°C)

Power supply 230, 24, 12 V AC, 3-point electrical control.

These actuators are provided with auxiliary limit switches and removable terminal block connection.

	Power supply V (VA)	Control	Run time sec.	Nominal Torque Kg/cm (Nm)	Starting Torque Kg/cm (Nm)
CDK 032	12V AC (4)	3 points	30	10 (1)	20 (2)
CDK 034	24V AC (1)	3 points	30	10 (1)	20 (2)
CDK 038	230V AC (4)	3 points	30	10 (1)	20 (2)
CDK 062	12V AC (4)	3 points	60	15 (1.5)	30 (3)
CDK 064	24V AC (1)	3 points	60	15 (1.5)	30 (3)
CDK 068	230V AC (4)	3 points	60	15 (1.5)	30 (3)



SVK 014/C

ACTUATOR WITH COSTER LINKAGE FOR HMM VALVES

Power supply 24V AC, electric control at 0-10 V DC.

These actuators are supplied with 1 metre long connection cables

	Power supply V (VA)	Control	Run time sec.	Nominal Torque Nm	Starting Torque Nm
SVK 014/C	24V AC	0...10 V DC	60	2.5	5



ATR 868

WIRELESS ACTUATOR FOR RADIATORS

Actuator powered by 2 AA batteries.


ATR 868 communicates wirelessly with the CSW 868 device, which acquires up to 40 devices.

Suitable for controlling VGT valves ... for radiators.

ATR 868

Actuator/controller for radiators

System architecture for wireless control of radiator heating systems

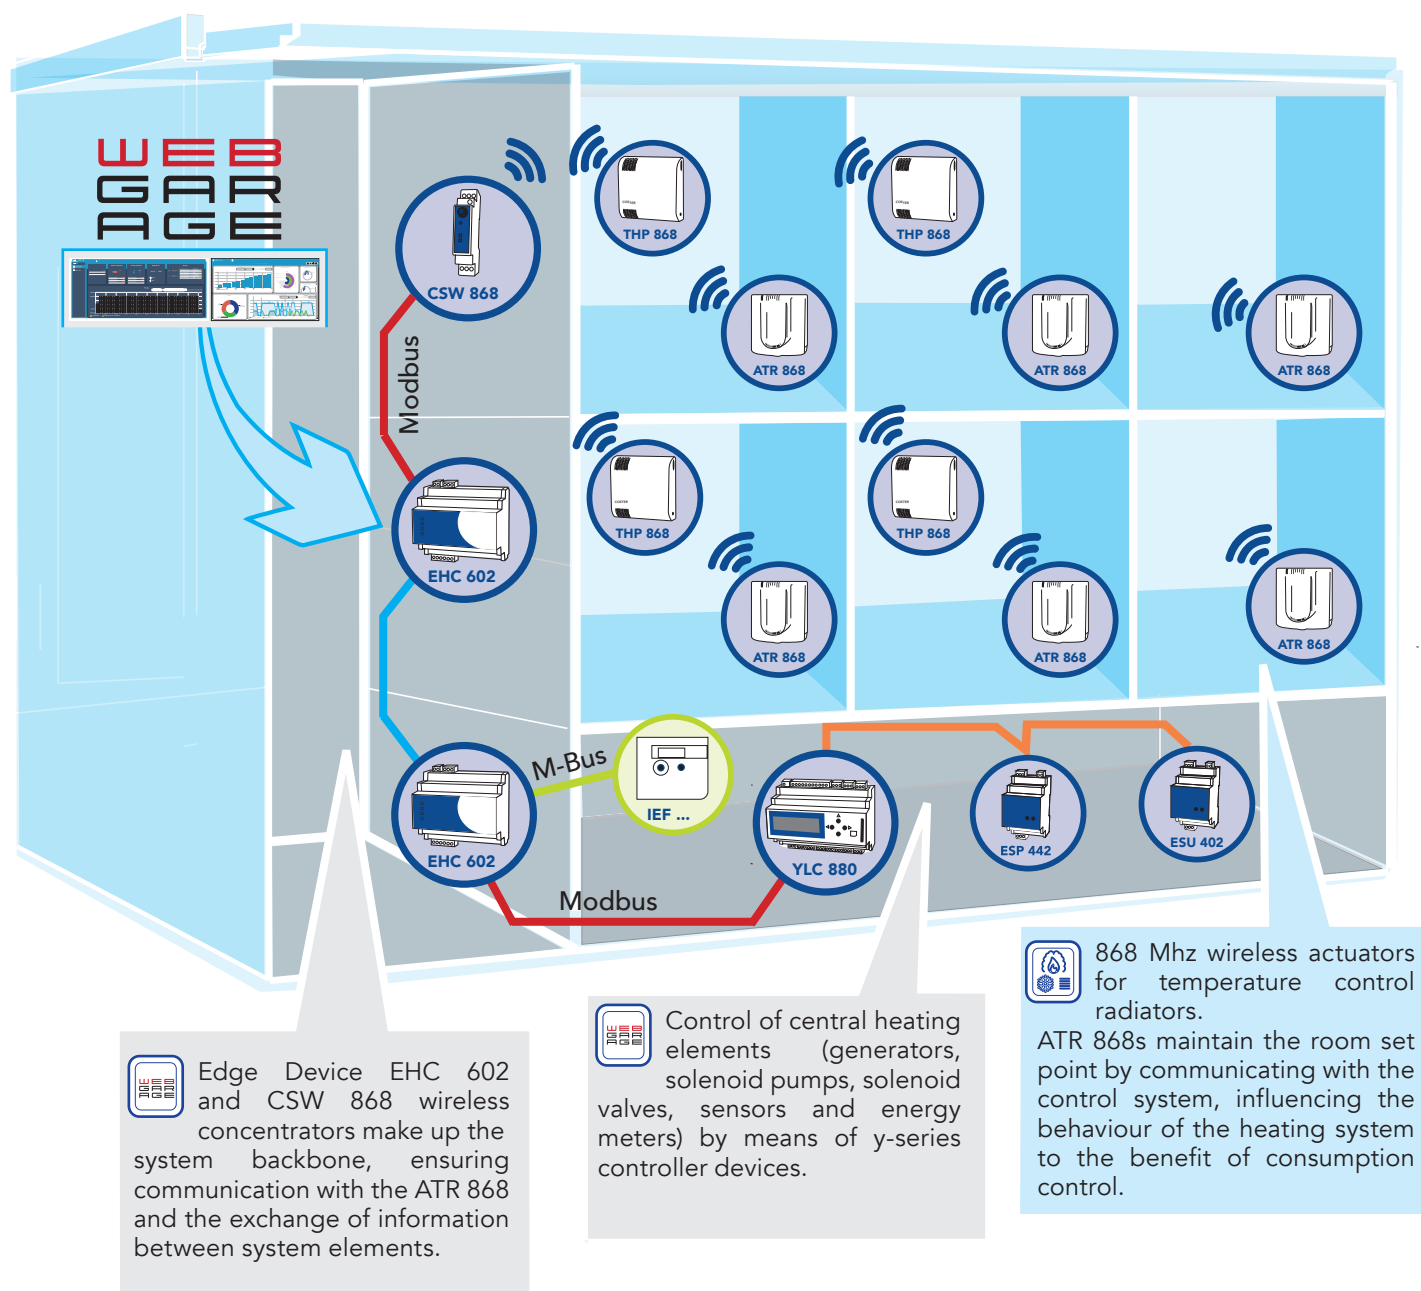



DGT ...

RADIATOR LOCKSHIELD VALVE PN 10 (5...90 °C)

It is the valve that is installed at the bottom of the radiator, as a lockshield, which cannot be motorised.

STRAIGHT

DGT 110	Radiator lockshield valve DN 3/8"
DGT 115	Radiator lockshield valve DN 1/2"
DGT 120	Radiator lockshield valve DN 3/4"
DGT 110/R	Radiator lockshield valve DN 3/8" for copper pipe connection
DGT 115/R	Radiator lockshield valve DN 1/2" for copper pipe connection

ANGLED

DGT 210	Radiator lockshield valve DN 3/8"
DGT 215	Radiator lockshield valve DN 1/2"
DGT 220	Radiator lockshield valve DN 3/4"
DGT 210/R	Radiator lockshield valve DN 3/8" for copper pipe connection
DGT 215/R	Radiator lockshield valve DN 1/2" for copper pipe connection

ACCESSORIES

AGT 10	Nut with rubber dual-cone for copper pipe connection (10 mm)
AGT 12	Nut with rubber dual-cone for copper pipe connection (12 mm)
AGT 14	Nut with rubber dual-cone for copper pipe connection (14 mm)
AGT 15	Nut with rubber dual-cone for copper pipe connection (15 mm)
AGT 16	Nut with rubber dual-cone for copper pipe connection (16 mm)



VGT ...

RADIATOR CONTROL VALVE PN 10 (5...90 °C)

Standard connection for standardised thermostatic heads, motor-driven.

STRAIGHT

VGT 110	Radiator control valve DN 3/8"
VGT 115	Radiator control valve DN 1/2"
VGT 120	Radiator control valve DN 3/4"
VGT 110/R	Radiator control valve DN 3/8" for copper pipe connection
VGT 115/R	Radiator control valve DN 1/2" for copper pipe connection

ANGLED

VGT 210	Radiator control valve DN 3/8"
VGT 215	Radiator control valve DN 1/2"
VGT 220	Radiator control valve DN 3/4"
VGT 210/R	Radiator control valve DN 3/8" for copper pipe connection
VGT 215/R	Radiator control valve DN 1/2" for copper pipe connection

RELATED PRODUCTS

AGT 10	Nut with rubber dual-cone for copper pipe connection (10 mm)
AGT 12	Nut with rubber dual-cone for copper pipe connection (12 mm)
AGT 14	Nut with rubber dual-cone for copper pipe connection (14 mm)
AGT 15	Nut with rubber dual-cone for copper pipe connection (15 mm)
AGT 16	Nut with rubber dual-cone for copper pipe connection (16 mm)



YDG 2..

2 WAY BALL VALVES (-15...120 °C)
UP TO 4" SLA COSTER CONNECTIONS,
EUROPEAN SLA SQUARE FLANGE SYSTEM

General purpose ball shut-off valves.
Threaded valves DN 1/2" ...4".

Suitable actuators

	DN	PN	Kvs ⁽¹⁾ m³/h	CRB ... CVC ... bar ⁽²⁾	CVH ... bar ⁽²⁾	CVF ... bar ⁽²⁾
YDG 215	1/2"	40	16.3	10	10	–
YDG 220	3/4"	40	29.5	10	10	–
YDG 225	1"	40	43	10	10	–
YDG 232	1"1/4	40	89	10	10	–
YDG 240	1"1/2	40	230	–	10	–
YDG 250	2"	40	265	–	10	–
YDG 265	2"1/2	25	540	–	10	–
YDG 280	3"	16	873	–	–	10
YDG 2100	4"	16	1,390	–	–	10

(1) Kvs: flow coefficient: flow rate in m³/h
with open valve and 100 kPa pressure
drop.
100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp
max. permitted by the actuator



YDG 2../A

2 WAY BALL VALVES (-15...120 °C)
UP TO 4" SLA COSTER CONNECTIONS,
EUROPEAN SLA SQUARE FLANGE SYSTEM

FOR ACE 008P ACTUATOR

General purpose ball shut-off valves.
Threaded valves DN 1/2" ...4".

Suitable actuator

	DN	PN	Kvs ⁽¹⁾ m³/h	ACE 008P bar ⁽²⁾
YDG 215/A	1/2"	40	16.3	10
YDG 220/A	3/4"	40	29.5	10
YDG 225/A	1"	40	43	10
YDG 232/A	1"1/4	40	89	10
YDG 240/A	1"1/2	40	230	10
YDG 250/A	2"	40	265	10



YDG 2 .../stainless

STAINLESS STEEL BALL VALVES
2 WAY PN 64 (-20...160 °C) UP TO 2"

Stainless steel valves for high pressure, and for liquids that require it.
Threaded valves DN 1/2"...2"..

	DN	Kvs ⁽¹⁾ m³/h	Suitable actuators	
			CRB ... CVC ... bar ⁽²⁾	CVH ... bar ⁽²⁾
YDG 215/Inox	1/2"	16.3	10	10
YDG 220/Inox	3/4"	29.5	10	10
YDG 225/Inox	1"	43	10	10
YDG 232/Inox	1"1/4	89	10	10
YDG 240/Inox	1"1/2	230	–	10
YDG 250/Inox	2"	265	–	10




YDG 2../A/Inox

STAINLESS STEEL BALL VALVES
2 WAY PN 64 (-20...160 °C) UP TO 2"
FOR ACE 008P ACTUATOR

Stainless steel valves for high pressure, and for liquids that require it.
Threaded valves DN 1/2"...2".

	DN	Kvs ⁽¹⁾ m³/h	Suitable actuator
			ACE 008P bar ⁽²⁾
YDG 215/A/Inox	1/2"	16.3	10
YDG 220/A/Inox	3/4"	29.5	10
YDG 225/A/Inox	1"	43	10
YDG 232/A/Inox	1"1/4	89	10
YDG 240/A/Inox	1"1/2	230	10
YDG 250/A/Inox	2"	265	10




XLG 3 ..

BALL ZONE VALVES
3 WAY PN 6 (–15...120°C)
WITH REDUCED KVS ON THIRD WAYS

XLG 3.. valves are used for diverting water flow in heating or cooling systems.

	DN	Kvs ⁽¹⁾ m³/h		Suitable actuators		
		direct	angle	CRB ... CVC ...	CVH 11. CVH 63./21./05	
				bar ⁽²⁾	bar ⁽²⁾	bar ⁽²⁾
XLG 315	1/2"	16.3	1.5	6	6	6
XLG 320	3/4"	29.5	2.7	6	6	6
XLG 325	1"	43	3.9	6	6	6
XLG 332	1"1/4	89	7.9	6	6	6
XLG 341	1"1/2	160	14.8	-	6	6
XLG 351	2"	265	24.5	-	-	6



XLG 3../A

BALL ZONE VALVES
3 WAY PN 6 (–15...120°C)
WITH REDUCED KVS ON THIRD WAYS
FOR ACE 008P ACTUATOR

XLG 3.. valves are used for diverting water flow in heating or cooling systems.

	DN	Kvs ⁽¹⁾ m³/h		Suitable actuator
		direct	angle	ACE 008P bar ⁽²⁾
XLG 315/A	1/2"	16.3	1.5	6
XLG 320/A	3/4"	29.5	2.7	6
XLG 325/A	1"	43	3.9	6
XLG 332/A	1"1/4	89	7.9	6
XLG 341/A	1"1/2	160	14.8	6
XLG 351/A	2"	265	24.5	6

(1) Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop. 100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp max. permitted by the actuator



XDG 3 ..

3 WAY SCREWED FEMALE BALL PN 6 (–15...120°C)
IN DEVIATION AT KVS CONSTANT KVS ON BOTH WAYS

These are general-purpose 3-way valves used for diversion with straight inputs or outputs.

Diverter valves, threaded DN 1/2"…2".

	DN inches	Kvs ⁽¹⁾ m³/h	Suitable actuators		
			CRB ... CVC ... bar ⁽²⁾	CVH 11. bar ⁽²⁾	CVH 63./21./05 bar ⁽²⁾
XDG 310	3/8"	1.8	6	6	6
XDG 315	1/2"	3.9	6	6	6
XDG 320	3/4"	7.9	6	6	6
XDG 325	1"	13	6	6	6
XDG 332	1"1/4	20.7	6	6	6
XDG 340	1"1/2	38.7	-	6	6
XDG 350	2"	54	-	-	6



XDG 3../A

3 WAY SCREWED FEMALE BALL PN 6 (–15...120°C)
IN DEVIATION AT KVS CONSTANT KVS ON BOTH WAYS
FOR ACE 008P ACTUATOR

These are general-purpose 3-way valves used for diversion with straight inputs or outputs.

Diverter valves, threaded DN 1/2"…2".

	DN inches	Kvs ⁽¹⁾ m³/h	Suitable actuator
			ACE 008P bar ⁽²⁾
XDG 310/A	3/8"	1.8	6
XDG 315/A	1/2"	3.9	6
XDG 320/A	3/4"	7.9	6
XDG 325/A	1"	13	6
XDG 332/A	1"1/4	20.7	6
XDG 340/A	1"1/2	38.7	6
XDG 350/A	2"	54	6

(1) Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop. 100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp max. permitted by the actuator



2S

2 WAY BALL VALVES FLANGED PN 16 (-15...120 °C)

Ball valves, sealed, for shut-off in installations: boilers and other general purposes, DN 40...200.


	DN mm	Kvs ⁽¹⁾ m³/h	Suitable actuators		
			CVH 63./21. bar ⁽²⁾	CVF ... bar ⁽²⁾	CVS 808 bar ⁽²⁾
2S DN 40	40	230	6	-	-
2S DN 50	50	265	6	-	-
2S DN 65	65	540	6	-	-
2S DN 80	80	873	-	6	-
2S DN 100	100	1,390	-	6	-
2S DN 100S	100	1,390	-	-	10
2S DN 125	125	1,707	-	-	10
2S DN 150	150	2,024	-	-	10
2S DN 200	200	2,720	-	-	10



VSG ... - VSF ...

3 WAY SLIPPER VALVES PN 6 (10...110°C)

Control valves for circulating water temperature in heating systems, DN 15...150.



3 WAY THREADED	DN inches	Kvs ⁽¹⁾ m³/h	Rotor ⁽³⁾	Length ⁽⁴⁾ mm	Suitable actuator		
					CVC ... bar ⁽²⁾	CVH... bar ⁽²⁾	CVF ... bar ⁽²⁾
VSG 320	3/4"	13	sector	130	0.3	0.5	-
VSG 325	1"	13	sector	130	0.3	0.5	-
VSG 332	1"1/4	19	sector	142	0.2	0.5	-
VSG 340	1"1/2	29	sector	160	0.2	0.5	-
VSG 350	2"	57	sector	190	0.2	0.5	-

3 WAY FLANGED	mm						
VSF 340	40	29	sector	180	0.2	0.5	-
VSF 350	50	57	sector	200	0.2	0.5	-
VSF 365	65	81	sector	230	-	0.4	-
VSF 380	80	170	sector	250	-	0.4	-
VSF 3100	100	240	sector	280	-	0.3	0.5 ⁽⁵⁾
VSF 3125	125	470	sector	300	-	-	0.5
VSF 3150	150	700	sector	350	-	-	0.5


(1) Kvs: : flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop.
100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure
Δp max. permitted by the actuator

(3) Rotor type: for 3-way valves: sector
= left or right side way always open;
butterfly = central way always open

(4) Length: flange to flange

(5) With CVF: coupling only possible
with AVF 171 connection
With CVH: direct coupling



VFG ... - VFF ...

3 OR 4 WAY BUTTERFLY VALVES

PN 6 (10...110 °C)

Control valves for circulating water temperature in heating systems, DN 15...150.
IN THE 4-WAY THE ROTARY ELEMENT IS ONLY BUTTERFLY

					Suitable actuators		
					CVC ... bar ⁽²⁾	CVH... bar ⁽²⁾	CVF ... bar ⁽²⁾
3 WAY THREADED	DN inches	Kvs⁽¹⁾ m³/h	Rotor⁽³⁾	Length⁽⁴⁾ mm			
VFG 320	3/4"	13	butterfly	130	0.3	0.5	-
VFG 325	1"	13	butterfly	130	0.3	0.5	-
VFG 332	1"1/4	19	butterfly	142	0.2	0.5	-
VFG 340	1"1/2	29	butterfly	160	0.2	0.5	-
VFG 350	2"	57	butterfly	190	0.2	0.5	-
3 WAY FLANGED	mm						
VFF 340	40	29	butterfly	180	0.2	0.5	-
VFF 350	50	57	butterfly	200	0.2	0.5	-
VFF 365	65	81	butterfly	230	-	0.4	-
VFF 380	80	170	butterfly	250	-	0.4	-
VFF 3100	100	240	butterfly	280	-	0.3	0.5 ⁽⁵⁾
VFF 3125	125	470	butterfly	300	-	-	0.5
VFF 3150	150	700	butterfly	350	-	-	0.5
4 WAY THREADED	inches						
VFG 420	3/4"	13	butterfly	130	0.3	0.5	-
VFG 425	1"	13	butterfly	130	0.3	0.5	-
VFG 432	1"1/4	19	butterfly	142	0.2	0.5	-
VFG 440	1"1/2	29	butterfly	160	0.2	0.5	-
VFG 450	2"	57	butterfly	190	0.2	0.5	-
4 WAY FLANGED	mm						
VFF 440	40	29	butterfly	180	0.2	0.5	-
VFF 450	50	57	butterfly	200	0.2	0.5	-
VFF 465	65	81	butterfly	230	-	0.4	-
VFF 480	80	170	butterfly	250	-	0.4	-
VFF 4100	100	240	butterfly	280	-	0.3	0.5 ⁽⁵⁾
VFF 4125	125	470	butterfly	300	-	-	0.5
VFF 4150	150	700	butterfly	350	-	-	0.5

(1) Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop. 100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp max. permitted by the actuator

(3) Rotor type: for 3-way valves: sector = left or right side way always open; butterfly = central way always open

(4) Length: flange to flange

(5) With CVF: coupling only possible with AVF 171 connection
With CVH: direct coupling



2 FT

SEALED BUTTERFLY VALVES

Wafer sealed butterfly valves PN 16, with stainless steel lens. Supplied with manual handle and connections for Coster actuators.

	DN mm	Suitable actuators		
		CVH ...	CVF ...	CVS 808
2FT 40	40	•	–	–
2FT 50	50	•	–	–
2FT 65	65	•	–	–
2FT 80	80	–	•	–
2FT 100	100	–	•	–
2FT 125	125	–	•	–
2FT 150	150	–	•	–
2FT 200	200	–	–	•



2F

2 WAY BUTTERFLY VALVES

SINGLE FLANGE PN 6 (10...110°C)

Single-flange valves for boiler shut-off, DN 50...200.

	DN mm	Kvs ⁽¹⁾ m³/h	Suitable actuators	
			CVC ... bar ⁽²⁾	CVH ... bar ⁽²⁾
2F DN 50	50	100	1.5	3
2F DN 65	65	160	1.5	3
2F DN 80	80	280	–	3
2F DN 100	100	450	–	3
2F DN 125	125	700	–	2
2F DN 150	150	1,200	–	2
2F DN 200	200	2,300	–	2

⁽¹⁾ Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop. 100 kPa = 10 mWG = 1 bar

⁽²⁾ bar: maximum differential pressure Δp max. permitted by the actuator



CRB ...

ROTARY ACTUATOR WITH ELECTRIC CABLE

230-24 V AC power supply, 3-point electrical control, 6 Nm torque.

	Power Supply V (VA)	Run time	Nominal Torque Kg/cm (Nm)	Starting Torque Kg/cm (Nm)	Valves 2S XDG/ XLG/YDG
CRB 098	230 AC (4.5)	90	60 (6)	90 (9)	1"1/4
CRB 094	24 AC (4.5)	90	60 (6)	90 (9)	1"1/4

SPECIAL VERSION

CRB 098/S2 Pack of 1 flange complete with seals, bolts, nuts and washers



CVC ...

ROTARY ACTUATOR WITH ELECTRIC TERMINAL BOX

230-24 V AC power supply, 3-point electrical control, 6 Nm torque..

	Power Supply V (VA)	Run time sec.	Nominal Torque Kg/cm (Nm)	Starting Torque Kg/cm (Nm)	Valves (up to DN)		
					VSG/VFG VSF/VFF mixing	butterfly 2F	XDG/ XLG/YLG ball
CVC 188	230V AC (2.5)	180	60 (6)	90 (9)	50	65	1"1/4
CVC 184	24V AC (2.5)	180	60 (6)	90 (9)	50	65	1"1/4
CVC 098	230V AC (4.5)	90	60 (6)	90 (9)	50	65	1"1/4
CVC 094	24V AC (4.5)	90	60 (6)	90 (9)	50	65	1"1/4
CVC 038	230V AC (5)	30	60 (6)	90 (9)	50	65	1"1/4
CVC 034	24V AC (5)	30	60 (6)	90 (9)	50	65	1"1/4
CVC 018	230V AC (7)	15	60 (6)	90 (9)	50	–	1"1/4
CVC 014	24V AC (7)	15	60 (6)	90 (9)	50	–	1"1/4

SPECIAL VERSIONS AT EXTRA CHARGE

CVC .../T With 6 W heater for fluid applications down to - 15 °C (without auxiliary micro)

ACCESSORIES FOR CRB AND CVC

SMP 750 Manual release for VSG/VFG/VSF/VFF mixing valves, 2F butterfly valve and XDG/XLG ball valves

SMP 760 Manual release for ball YDG 2 valves.. up to 1"1/4

AVA 101 Linkage for: Honeywell-Mut 2 (Controlli, Caleffi, Sara); Zentra; Buche (Cazzaniga, Sauter, Ari-Fasoli, Chibro-Muller, Vilb up to 2", Mastermann); Landis & Gyr (Lazzari, Tonon, Casem); Stark (Besser, Errevi, Intermes, Ari - Fasoli)

AVS 103 Linkage for: Honeywell-Mut 3 threaded old model (Controlli, Caleffi, Sara)

AVS 104 Linkage for: Landis & Gyr SN3-SN4



CVH ...

ROTARY ACTUATOR WITH MANUAL RELEASE

230-24V AC power supply, 3-point electrical control, torque 15 Nm.

	Power supply V (VA)	Run time sec.	Nominal Torque Kg/cm (Nm)	Starting Torque Kg/cm (Nm)	Valves (up to DN)				
					VSG/VFG VSF/VFF mixing	Butterfly 2F	Ball XDG/ XLG/	Ball YDG 2	Ball 2S
CVH 054	24 (4.5)	52	150 (15)	200 (20)	100	200	2"	2"1/2	–
CVH 058	230 (5)	52	150 (15)	200 (20)	100	200	2"	2"1/2	–
CVH 114	24 (4.5)	105	150 (15)	200 (20)	100	200	1"1/2	2"1/2	–
CVH 118	230 (4.5)	105	150 (15)	200 (20)	100	200	1"1/2	2"1/2	–
CVH 214	24 (4.5)	210	150 (15)	200 (20)	100	200	2"	2"1/2	65
CVH 218	230 (4.5)	210	150 (15)	200 (20)	100	200	2"	2"1/2	65
CVH 634	24 (4.5)	630	150 (15)	200 (20)	100	200	2"	2"1/2	65
CVH 638	230 (4.5)	630	150 (15)	200 (20)	100	200	2"	2"1/2	65

SPECIAL VERSIONS AT EXTRA CHARGE

CVH .../T Complete with 2 W internal heater for applications with fluid down to -15 °C

RELATED PRODUCTS

AVA 101 Linkage for:
Honeywell-Mut 2 (Controlli, Caleffi, Sara); Zentra; Buche (Cazzaniga, Sauter, Ari-Fasoli, Chibro-Muller, Vilb up to 2", Mastermann); Landis & Gyr (Lazzari, Tonon, Casem); Stark (Besser, Errevi, Intermes, Ari - Fasoli)

AVS 103 Linkage for:
Honeywell-Mut 3 threaded old model (Controlli, Caleffi, Sara)

AVS 104 Linkage for: Landis & Gyr SN3-SN4



CVS 808

ACTUATOR

FOR 2S DN 100S - 200 VALVES

	Power supply V (VA)	Run time sec.	Nominal Torque Kg/cm (Nm)	Starting Torque Kg/cm (Nm)	2S DN valves
CVS 808	230V AC (120)	55	8,000 (800)	8,000 (800)	100S-200



CVF ...

ROTARY ACTUATOR FOR DN 100...150

230-24 V AC power supply, 3-point electrical control, 1 Nm torque.
Standardised connection for Coster valves, except VFF 3100 and VFF 4100.
See accessories table for these valves.

	Power supply V (VA)	Run time sec.	Nominal Torque Kg/cm (Nm)	Starting Torque Kg/cm (Nm)	Valves (up to DN)		
					Mixing VSF/VFF	Butterfly 2S	Ball YDG 2
CVF 154	24 (7)	150	1,000 (100)	1,000 (100)	100...150	80 / 100	3" / 4"
CVF 158	230 (7)	150	1,000 (100)	1,000 (100)	100...150	80 / 100	3" / 4"
CVF 454	24 (6)	450	1,200 (120)	1,200 (120)	100...150	80 / 100	3" / 4"
CVF 458	230 (6)	450	1,200 (120)	1,200 (120)	100...150	80 / 100	3" / 4"

RELATED PRODUCTS

AVF 171 CVF Linkage for: Coster VFF 3100, VFF 4100 and VSF 3100

AVF 172 CVF linkage for:
Honeywell-Mut 2 flanged (Controlli, Caleffi, Sara); Jucker; Zentra;
Landis & Gyr (Lazzari, Tonon, Casem);
Stark (Besser, Errevi, Intermes, Ari-Fasoli);
Buche (Cazzaniga, Sauter, Ari-Fasoli, Chibro-Muller, Vilb up to 2", Mastermann)

SVK 014



ACTUATOR WITH ISO CONNECTIONS FOR V-BALL FROM DN 15 TO DN 25

Power supply 24V AC, electrical control at 0 - 10 V DC.
These actuators are supplied with 1 metre long connection cables

	Power supply V (VA)	Control	Run time sec.	Nominal Torque Nm	Starting Torque Nm
SVK 014	24V AC	0...10 V DC	60	2.5	5



COMMUNICATION
PROTOCOL



ACE 008/P

INTELLIGENT ACTUATOR FOR V-BALL CONTROL VALVES

Intelligent actuator with 230 V power supply for coupling with two-way or three-way equipercentual ball valves with ISO 5211:2017 - F03 connection
Driving and control via Modbus protocol or with 0-10V DC or three-point signal. Possible connection in BUS with Modbus/ RTU protocol;
Actuator release knob to allow manual movement of the valve and quick re-engagement of the kinematic chain.
Actuator limit switch auxiliary contacts (total open/close position)


RELATED PRODUCTS

ALM M12	Power supply cable with 220 V AC socket
AUX M12	Auxiliary cable for ACE 008
USB M12	Specific USB cable for ACE 008/P programming AUX
AVC 20-100	Connection for three-way slipper valves VSG oppure or three- or four-way butterfly VFG - VFF
AVX 10-32	Connection for three-way ball valves XLG3.. and XDG.
AVX 40-50	Connection for ball valves XLG 3.. and XDG... (DN 40-50)
AVY 15-32	Two-way ball connection YDG 2.. and YDG2../inox (DN 15-32)
AVY 40-50	Two-way ball connection YDG 2.. and YDG2../inox (DN 40-50)

Operation mode

ACE 008/p can operate in different modes:


- **0...10V DC positioner:** the actuator operates as a simple positioner driven by a 0...10V DC signal on the first universal input.
- **3-Point positioner:** the function is a simple positioner with a 3-point control signal. The opening or closing movement depends on the closure of the first two universal inputs set as digital.
- **Modbus positioner:** the actuator control is via Modbus/RTU protocol. A special register is used to set its position from 0% to 100%.
- **Modbus temperature controller:** in this case a temperature setpoint is delivered via the Modbus/RTU protocol. ACE 008/P will calculate its position based on an internal controller comparing the setpoint with the temperature measurement taken by the first universal input.
- **Modbus temperature controller with limitation:** this is quite similar to the previous case with a setpoint transferred through a Modbus register and the actuator adjusting its opening/closing based on the temperature detected. In this scenario, however, a temperature limit sensor is also added, which can also be set via Modbus/RTU protocol.
- **ACS Modbus controller:** ACE 008/P in this case performs the control of a Domestic Hot Water circuit based on the storage and recirculation sensors. Also in this case, the control setpoint is set via Modbus/RTU.

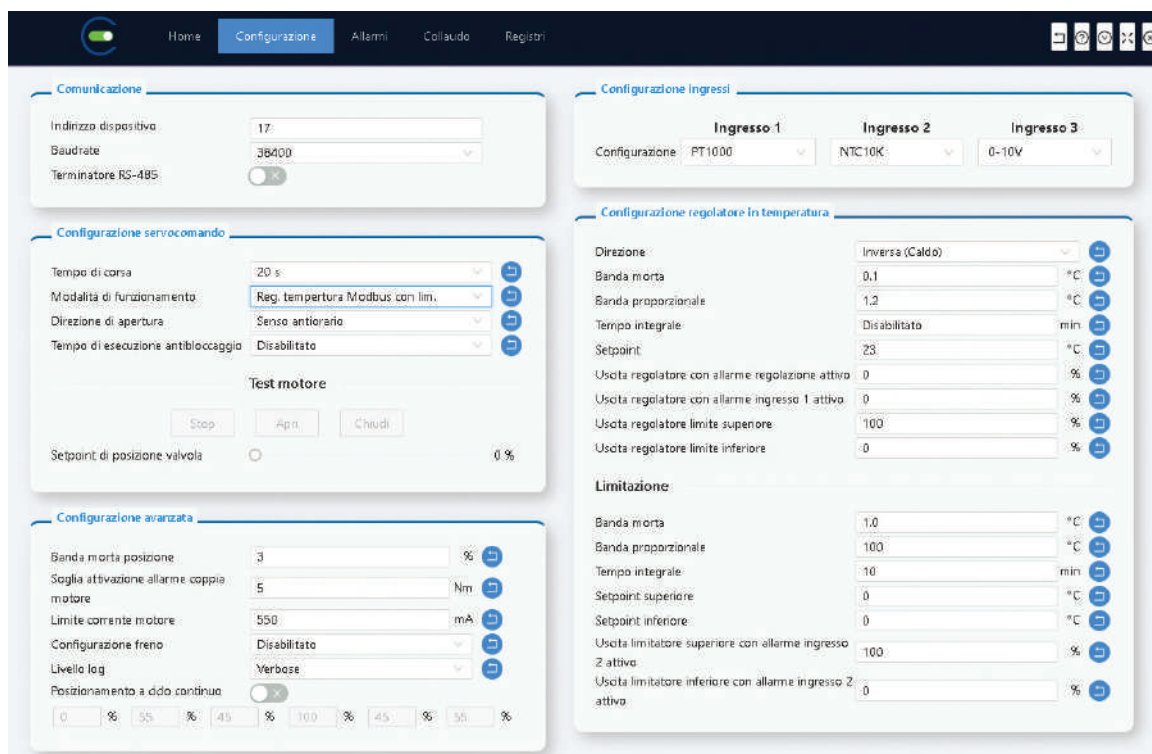

ACE 008/P can be configured via a special commissioning & maintenance tool within the CosterTools suite.

Through the configuration software, it is also possible to display some general information about the device:

- Inputs status and configuration
- The operating time, the controller output
- Card temperature
- Absorbed current, power and voltage
- The position of the valve, the insertion of the manual release
- Whether or not calibration is taking place
- The status of limit switches and movement

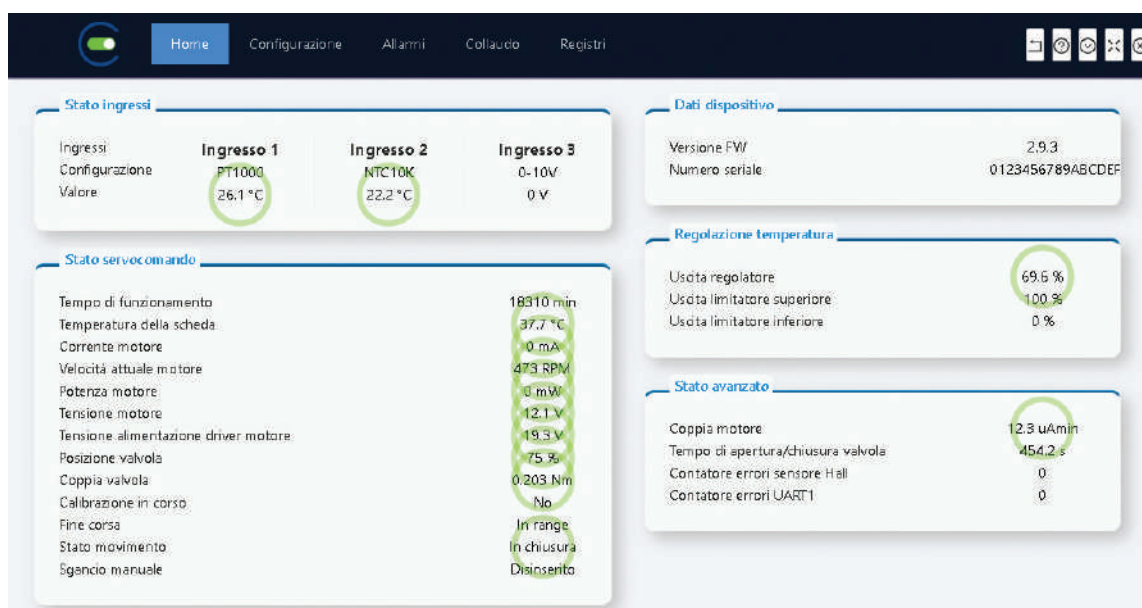



VBR 2..

V-BALL 2 way PN16 BALL CONTROL VALVES DN 15 - 20 - 25 - 32 - 40 - 50

Devices that allow, as the characterisation disc inserted varies, to obtain a certain thermal output with an opening/flow rate curve with an equipercentage trend.

	DN mm	Kvs ⁽¹⁾ m³/h	Suitable actuators	
			ACE 008/P bar ⁽²⁾	SVK 014 bar ⁽²⁾
VBR 215-0,25	15	0.25	2.5	2.5
VBR 215-0,4	15	0.4	2.5	2.5
VBR 215-0,63	15	0.63	2.5	2.5
VBR 215-1	15	1	2.5	2.5
VBR 215-1,6	15	1.6	2.5	2.5
VBR 215-2,5	15	2.5	2.5	2.5
VBR 215-4	15	4	2.5	2.5
VBR 215-6,3	15	6.3	2.5	2.5
VBR 220-4	20	4	2.5	2.5
VBR 220-6,3	20	6.3	2.5	2.5
VBR 220-8,6	20	8.6	2.5	2.5
VBR 220-10	20	10	2.5	2.5
VBR 225-6,3	25	6.3	2.5	–
VBR 225-10	25	10	2.5	–
VBR 225-16	25	16	2.5	–
VBR 232-10	32	10	2.5	–
VBR 232-16	32	16	2.5	–
VBR 232-25	32	25	2.5	–
VBR 240-16	40	16	2.5	–
VBR 240-25	40	25	2.5	–
VBR 250-25	50	25	2.5	–
VBR 250-40	50	40	2.5	–

(1) Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop. 100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp max. permitted by the actuator



VBR 3..

V-BALL 3 WAY PN16 BALL CONTROL VALVES DN 15 - 20 - 25 - 32 - 40 - 50

Devices that allow, as the characterisation disc inserted varies, to obtain a certain thermal output with an opening/flow rate curve with an equipercentage trend.

	DN mm	Kvs ⁽¹⁾ m³/h	Suitable actuators	
			ACE 008/P bar ⁽²⁾	SVK 014 bar ⁽²⁾
VBR 315-0,25	15	0.25	2.5	2.5
VBR 315-0,4	15	0.4	2.5	2.5
VBR 315-0,63	15	0.63	2.5	2.5
VBR 315-1	15	1	2.5	2.5
VBR 315-1,6	15	1.6	2.5	2.5
VBR 315-2,5	15	2.5	2.5	2.5
VBR 315-4	15	4	2.5	2.5
VBR 315-6,3	15	6.3	2.5	2.5
VBR 320-4	20	6.3	2.5	2.5
VBR 320-6,3	20	6.3	2.5	2.5
VBR 320-10	20	10	2.5	1
VBR 325-6,3	25	6.3	2.5	–
VBR 325-10	25	10	2.5	–
VBR 325-16	25	16	2.5	–
VBR 332-10	32	10	2.5	–
VBR 332-16	32	16	2.5	–
VBR 332-25	32	25	2.5	–
VBR 340-16	40	16	2.5	–
VBR 340-25	40	25	2.5	–
VBR 350-25	50	25	2.5	–
VBR 350-40	50	40	2.5	–

⁽¹⁾ Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop. 100 kPa = 10 mWG = 1 bar

⁽²⁾ bar: maximum differential pressure Δp max. permitted by the actuator



VYG 615

6-WAY CONTROL VALVES

INTERNAL THREADED / PN 16 / DN 15

Fluid temperature: 6...80 °C

(1) **Kvs**: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop.
100 kPa = 10 mWG = 1 bar

(2) **bar**: maximum differential pressure Δp max. permitted by the actuator

(3) **Rotor type**: for 3-way valves: sector = left or right side way always open; butterfly = central way always open

	DN		Suitable actuator CVLR 90 sec ⁽³⁾ bar ⁽²⁾	Kvs (Seq. I) m ³ /h	Kvs (Seq. II) m ³ /h
	mm	inches			
VYG 615 - 0,25 - 0,25	15	1/2	3.5	0,25	0,25
VYG 615 - 0,25 - 0,4	15	1/2	3.5	0.25	0.4
VYG 615 - 0,25 - 0,63	15	1/2	3.5	0.25	0.63
VYG 615 - 0,25 - 1	15	1/2	3.5	0.25	1
VYG 615 - 0,25 - 1,3	15	1/2	3.5	0.25	1.3
VYG 615 - 0,25 - 1,8	15	1/2	3.5	0.25	1.8
VYG 615 - 0,4 - 0,25	15	1/2	3.5	0.4	0.25
VYG 615 - 0,4 - 0,4	15	1/2	3.5	0.4	0.4
VYG 615 - 0,4 - 0,63	15	1/2	3.5	0.4	0.63
VYG 615 - 0,4 - 1	15	1/2	3.5	0.4	1
VYG 615 - 0,4 - 1,3	15	1/2	3.5	0.4	1.3
VYG 615 - 0,4 - 1,8	15	1/2	3.5	0.4	1.8
VYG 615 - 0,63 - 0,25	15	1/2	3.5	0.63	0.25
VYG 615 - 0,63 - 0,4	15	1/2	3.5	0.63	0.4
VYG 615 - 0,63 - 0,63	15	1/2	3.5	0.63	0.63
VYG 615 - 0,63 - 1	15	1/2	3.5	0.63	1
VYG 615 - 0,63 - 1,3	15	1/2	3.5	0.63	1.3
VYG 615 - 0,63 - 1,8	15	1/2	3.5	0.63	1.8
VYG 615 - 1 - 0,25	15	1/2	3.5	1	0.25
VYG 615 - 1 - 0,4	15	1/2	3.5	1	0.4
VYG 615 - 1 - 0,63	15	1/2	3.5	1	0.63
VYG 615 - 1 - 1	15	1/2	3.5	1	1
VYG 615 - 1 - 1,3	15	1/2	3.5	1	1.3
VYG 615 - 1 - 1,8	15	1/2	3.5	1	1.8
VYG 615 - 1,3 - 0,25	15	1/2	3.5	1.3	0.25
VYG 615 - 1,3 - 0,4	15	1/2	3.5	1.3	0.4
VYG 615 - 1,3 - 0,63	15	1/2	3.5	1.3	0,63
VYG 615 - 1,3 - 1	15	1/2	3.5	1.3	1
VYG 615 - 1,3 - 1,3	15	1/2	3.5	1.3	1.3
VYG 615 - 1,3 - 1,8	15	1/2	3.5	1.3	1.8
VYG 615 - 1,8 - 0,25	15	1/2	3.5	1.8	0.25
VYG 615 - 1,8 - 0,4	15	1/2	3.5	1.8	0.4
VYG 615 - 1,8 - 0,63	15	1/2	3.5	1.8	0.63
VYG 615 - 1,8 - 1	15	1/2	3.5	1.8	1
VYG 615 - 1,8 - 1,3	15	1/2	3.5	1.8	1.3
VYG 615 - 1,8 - 1,8	15	1/2	3.5	1.8	1.8

RELATED PRODUCTS

ZR 2315 DN 15 connectors

ZR 2320 DN 20 connectors



VYG 620

6-WAY CONTROL VALVES

INTERNAL THREAD / PN 16 / DN 20

Fluid temperature: 6...80 °C

	DN		Suitable actuator CVLR ... 90 sec ³⁾ bar ²⁾	Kvs (Sequence I) m ³ /h	Kvs (Sequence II) m ³ /h
	mm	inches			
VYG 620 - 0,63 - 1,6	20	3/4	3.5	0.63	1.6
VYG 620 - 0,63 - 2,5	20	3/4	3.5	0.63	2.5
VYG 620 - 0,63 - 4	20	3/4	3.5	0.63	4
VYG 620 - 1 - 1,6	20	3/4	3.5	1	1.6
VYG 620 - 1 - 2,5	20	3/4	3.5	1	2.5
VYG 620 - 1 - 4	20	3/4	3.5	1	4
VYG 620 - 1,6 - 0,63	20	3/4	3.5	1.6	0.63
VYG 620 - 1,6 - 1	20	3/4	3.5	1.6	1
VYG 620 - 1,6 - 1,6	20	3/4	3.5	1.6	1.6
VYG 620 - 1,6 - 2,5	20	3/4	3.5	1.6	2.5
VYG 620 - 1,6 - 4	20	3/4	3.5	1.6	4
VYG 620 - 2,5 - 0,63	20	3/4	3.5	2.5	0.63
VYG 620 - 2,5 - 1	20	3/4	3.5	2.5	1
VYG 620 - 2,5 - 1,6	20	3/4	3.5	2.5	1.6
VYG 620 - 2,5 - 2,5	20	3/4	3.5	2.5	2.5
VYG 620 - 2,5 - 4	20	3/4	3.5	2.5	4
VYG 620 - 4 - 0,63	20	3/4	3.5	4	0.63
VYG 620 - 4 - 1	20	3/4	3.5	4	1
VYG 620 - 4 - 1,6	20	3/4	3.5	4	1.6
VYG 620 - 4 - 2,5	20	3/4	3.5	4	2.5
VYG 620 - 4 - 4	20	3/4	3.5	4	4

RELATED PRODUCTS

ZR 2315 DN 15 Connectors

ZR 2320 DN 20 Connectors

(1) Kvs: : flow coefficient: flow rate in m³/h
with open valve and 100 kPa pressure
drop.
100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp
max. permitted by the actuator

(3) Rotor type: for 3-way valves: sector
= left or right side way always open;
butterfly = central way always open



CVLR..

ROTARY ACTUATOR
FOR MANUAL OVERRIDE
5 NM TORQUE

For VYG valves

COMMUNICATION
PROTOCOL



	Power supply V (VA)	Control	Run time sec.	Nominal Torque (Nm)	Auxiliary limit switch (accessory)	Valves connections	Valves DN VYG 2.. VYG 3.. VYG 6..
CVLR 095	24V AC/DC (2)	3 points	90	5	1 or 2	F04	1/2"÷1"
CVLR 095-0	24V AC/DC (2)	0 - 10 V	90	5	1 or 2	F04	1/2"÷1"
CVLR 095-MOD	24V AC/DC (2)	Modbus	90	5	1 or 2	F04	1/2"÷1"
CVLR 097	100 - 240V AC (4)	3 points	90	5	1 or 2	F04	1/2"÷1"

RELATED PRODUCTS

FCS 123	Auxiliary limit switch with one 3 (0.5) A changeover contact, 250V AC adjustable 0-100 %
FCS 223	Auxiliary limit switch with one 3 (0.5) A changeover contact, 250V AC adjustable 0-100 %



VOBG 3..

3 WAY MALE THREADED SEAT VALVES

PN 16 (-10 ... 120 °C)

BRONZE BODY

DN 1/2"...2", convertible from 3 to 2 ways.

	DN body	DN valve connection	DN pipe connection	Kvs ⁽¹⁾ m³/h	run mm	Suitable actuators			
						CLNV ... 3.75/7.5 s/mm		CLNF U ⁽⁴⁾ 7.5 s/mm	
						bar ⁽²⁾	s. ⁽³⁾	bar ⁽²⁾	s. ⁽³⁾
VOBG 311	15	1"1/8	1/2"	0.63	15	4	56/112	4	112
VOBG 312	15	1"1/8	1/2"	1.0	15	4	56/112	4	112
VOBG 313	15	1"1/8	1/2"	1.6	15	4	56/112	4	112
VOBG 314	15	1"1/8	1/2"	2.5	15	4	56/112	4	112
VOBG 315	15	1"1/8	1/2"	4.0	15	4	56/112	4	112
VOBG 320	20	1"1/4	3/4"	6.3	15	4	56/112	4	112
VOBG 325	25	1"1/2	1"	10	15	4	56/112	4	112
VOBG 332	32	2"	1"1/4	16	15	4	56/112	4	112
VOBG 340	40	2"1/4	1"1/2	25	15	4	56/112	4	112
VOBG 350	50	2"3/4	2"	40	15	3.5	56/112	2.8	112

RELATED PRODUCTS

	Description	Features
ARS 454	Stem heaters for fluid temperatures down to -10°C. 24 V AC power supply (45W) for valves DN 15...50	
TVG G16	1"1/8 female cap complete with gasket	311 ... 315 (15)
TVG G20	1"1/4 female plug complete with gasket	320 (20)
TVG G25	1"1/2 female plug complete with gasket	325 (25)
TVG G32	2" female plug complete with gasket	332 (32)
TVG G40	2"1/4 female plug complete with gasket	340 (40)
TVG G50	2"3/4 female plug complete with gasket	350 (50)

(1) Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop.
100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp max. permitted by the actuator

(3) sec: time required for the actuator to make the valve perform its full stroke

(4) Actuator with emergency closure

(5) Female couplings with fittings



VORF 3..

3 WAY FLANGED SEAT VALVES
PN 6 (–10 ... 120 °C) CAST IRON BODY

Suitable actuators

	DN body	Kvs ⁽¹⁾ m ³ /h	Run mm	CLNV...		CLNF U... ⁽⁴⁾		CLAV...	
				2.75/7.5 s/mm bar ⁽²⁾	s. ⁽³⁾	7.5 s/mm bar ⁽²⁾	s. ⁽³⁾	3.75/7.5 s/mm bar ⁽²⁾	s. ⁽³⁾
VORF 315	15	4.0	15	4	56/112	4	112	–	–
VORF 320	20	6.3	15	4	56/112	4	112	–	–
VORF 325	25	10	15	4	56/112	4	112	–	–
VORF 332	32	16	15	4	56/112	4	112	–	–
VORF 340	40	25	15	4	56/112	4	112	–	–
VORF 350	50	40	15	3.5	56/112	2.8	112	–	–
VORF 364	65	58	18	2.0	67/135	1.6	135	–	–
VORF 379	80	90	18	1.35	67/135	1.0	135	–	–
VORF 3100	100	145	30	–	–	–	–	1.6	112/225

ATTENTION:

VORF 364 and VORF 379 models must be coupled with **CLNV 318** or **CLNV 314** actuators

(1) Kvs: flow coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop.
100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp max. permitted by the actuator

(3) sec: time required for the actuator to make the valve perform its full stroke

(4) Actuator with emergency closure



VONF 3..

3 WAY FLANGED SEAT VALVES

PN 16 (–10 ... 120°C) CAST IRON BODY

Suitable actuators

	DN body mm	Kvs ⁽¹⁾ m³/h	Run mm	CLNV ... 3.75/7.5 s/mm		CLNF U ⁽⁴⁾ 7.5 s/mm		CLAV ⁽⁴⁾ 3.75/7.5 s/mm	
				bar ⁽²⁾	s. ⁽³⁾	bar ⁽²⁾	s. ⁽³⁾	bar ⁽²⁾	s. ⁽³⁾
VONF 315	15	4.0	15	4	56 / 112	4	112	–	–
VONF 320	20	6.3	15	4	56 / 112	4	112	–	–
VONF 325	25	10	15	4	56 / 112	4	112	–	–
VONF 332	32	16	15	4	56 / 112	4	112	–	–
VONF 340	40	25	15	4	56 / 112	4	112	–	–
VONF 350	50	40	15	3.5	56 / 112	2.8	112	–	–
VONF 364	65	58	18	2.0	67 / 135	1.6	135	–	–
VONF 365	65	63	30	–	–	–	–	4.0	112/225
VONF 379	80	90	18	1.35	67 / 135	1.0	135	–	–
VONF 380	80	100	30	–	–	–	–	2.7	112/225
VONF 3100	100	145	30	–	–	–	–	1.6	112/225
VONF 3125	125	220	40	–	–	–	–	0.9	150/300
VONF 3150	150	320	40	–	–	–	–	0.6	150/300

RELATED PRODUCTS

ARS 454 Stem heaters for fluid temperatures down to a -10°C.
Power supply 24V AC (45W) for valve DN 15:...50

ARS 604B Stem heater for fluid temperatures down to -10°C.
Power supply 24V AC (60W) per valvole DN 65:...250

ATTENTION:

VONF 364 and **VONF 379** models must be coupled with **CLNV 318** or **CLNV 314** actuators

(1) Kvs: low coefficient: flow rate in m³/h
with open valve and 100 kPa pressure
drop. .
100 kPa = 10 mWG = 1 bar

(2) bar: maximum differential pressure Δp
max. permitted by the actuator

(3) sec: time required for the actuator to
make the valve perform its full stroke

(4) Actuator with emergency closure



CLNV ...

LINEAR ACTUATORS
FOR VALVES VOBG .., VORF .., VONF ..

	Power supply V (VA)	Control	Position signal	Micro- switch auxiliaries ⁽¹⁾	Maximum run mm	Force N	Speed sec./mm
CLNV 214	24V AC (1)	3-points	No	Yes	15	500	150 - 15
CLNV 218	230V AC (4)	3-points	No	Yes	15	500	150 - 15
CLNV 254-0	24V AC (2)	0 - 10 V	0 - 10 V	Yes	15	500	150 - 15
CLNV 318	230V AC (4.5)	3-points	No	Yes	20	1,000	150 - 20
CLNV 318-R	230V AC (4.5)	3-points	No	Yes	20	1,000	150 - 20
CLNV 314	24V AC (3)	3-points	No	Yes	20	1,000	150 - 20
CLNV 314-R	24V AC (3)	3-points	No	Yes	20	1,000	150 - 20
CLNV 354-0	24V AC (3)	0 - 10 V	0-10 V	Yes	20	1,000	150 - 20
CLNV 354R-0	24V AC (4.5)	0 - 10 V	0-10 V	Yes	20	1,000	150 - 20

ACCESSORY FOR AUXILIARY CONTACTS

FCS 2A Auxiliary contacts for globe valve actuators



CLAV ...

LINEAR ACTUATORS
FOR VALVES VORF .., VONF ..

	Power supply V (VA)	Control	Position signal	Micro- switch auxiliaries ⁽¹⁾	Maximum run mm	Force N	Speed sec./mm
CLAV 214	24V AC (4.5)	3-points	No	Yes	40	2,500	150 - 40
CLAV 218	230V AC (9.5)	3-points	No	Yes	40	2,500	150 - 40
CLAV 254-0	24V AC (6)	0 - 10 V	0 - 10 V	Yes	40	2,500	150 - 40

ACCESSORY FOR AUXILIARY CONTACTS

FCS 2A Auxiliary contacts for globe valve actuators

⁽¹⁾ using FCS2A accessory



CLNF ...

LINEAR ACTUATORS
FOR VALVES VOBG .., VORF .., VONF ..
WITH EMERGENCY CLOSURE

	Power supply V (VA)	Control	Position signal	Auxiliary limit switch ⁽¹⁾	Maximum run mm	Force N	Speed sec./mm	Speed emerg. sec./mm
CLNF U254	24V AC (6)	3-points	No	Yes	20	1000	150-20	35-20
CLNF U254-0	24V AC (6)	0 - 10 V	0 -10 V	Yes	20	1000	150-20	35-20
CLNF U254R-0	24V AC (6)	0 - 10 V	0 -10 V	Yes	20	1000	150-20	35-20
CLNF U258-R	230V AC (4.5)	3-points	No	Yes	20	1000	150-20	35-20

ACCESSORY FOR AUXILIARY CONTACTS

FCS 2A Auxiliary contacts for globe valve actuators

⁽¹⁾ using FCS2A accessory



ACTUATOR	Valves (brand and type)	DN
upon request	Coster VL - VF (2000÷2010)	65 ÷ 100
CLNV..R ÷ CLNF U..R	Coster VRG - VRB - VL - VF - VE - VS (2000÷2009)	15 ÷ 50
	Coster VRGN - VRBN - VLN - VFN (2010)	15 ÷ 50
	Coster VLN - VFN (2010)	65 ÷ 80
CLNV...R-0 ÷ CLNF U...R-0	Controlli VSB - VMB - VSB..F - VMB..F	15 ÷ 50
	Controlli 2FAA, 2FAA...P, 2FAA...T	15 ÷ 80
	Controlli 2FGA	15 ÷ 100
	Controlli 2FGB	25 ÷ 150
	Controlli 3FAA	15 ÷ 80
	Controlli 3FGB	25 ÷ 150
CLNV...R-0 ÷ CLNF U...R-0	Honeywell V5011R - V5013R	15 ÷ 50
	Honeywell V5015	25 ÷ 80
	Honeywell V5049A - V5050A	15 ÷ 65
	Honeywell V5095A	20 ÷ 80
	Honeywell V5328A - V5329A - V5329C	15 ÷ 80
	Honeywell V5011A - H, J	15 ÷ 100
	Honeywell V5011N	15 ÷ 50
	Honeywell V5011S	15 ÷ 50
	Honeywell V5013A-F	15 ÷ 100
upon request	Honeywell V5015A	100 ÷ 150
	Honeywell V5049A - V5050A	80 ÷ 150
CLNV...R-0 ÷ CLNF U...R-0	Siemens VVF61 - VXF61	15 ÷ 25
	Siemens VPF52E/F - VVF52 - VXF41	15 ÷ 40
	Siemens VVG41 - VXG41	15 ÷ 50
	Siemens VVF21 - VVF40	15 ÷ 80
	Siemens VXF21 - VVF31 - VXF31	25 ÷ 80
upon request	Siemens VVF21 - VXF21	100
	Siemens VVF31 - VXF31 - VVF40 - VXF40	100 ÷ 150
	Siemens VVF41 - VVF45	50 ÷ 150
	Siemens VVF61	40 ÷ 150
	Siemens VXF41	65 ÷ 150
	Siemens VXF61	32 ÷ 150
	Siemens VMP45	10 ÷ 20
	Siemens VXP45	10 ÷ 20

PRODUCTS

ACTUATOR	Valves (brand and type)	DN
CLNV...R-0 ÷ CLNF U...R-0	Johnson BM-2xx 2 - BM-2xx 8	15 ÷ 50
	Johnson VB7216	15 ÷ 50
	Johnson VG7201 - VG7401 - VG7804	15 ÷ 50
	Johnson VG7203 - VG7403 - VG7802	15 ÷ 50
	Johnson VB7816	15 ÷ 50
	Johnson VBD-4xx 4 - VBD-4xx 8 - VG82/84/88/89	15 ÷ 40
	Johnson VBF-0xx 4 - VBF-0xx 8 - VBF-2xx 4 - VBF-2xx 8	15 ÷ 50
upon request	Johnson VBD-4xx 8 - VBD-4xx 8 - VG82/84/88/89	50 ÷ 150
	Johnson VBF-0xx 4 - VBF-0xx 8 - VBF-2xx 4 - VBF-2xx 8	65 ÷ 100
CLNV...R-0 ÷ CLNF U...R-0	Sauter B6F..F - B6G..F - B6R..F - B6S..F - BXD..F - BXE..F	15 ÷ 50
	Sauter V6F..F - V6G..F - V6R..F - V6S..F - VXD..F - VXE..F	15 ÷ 50
	Sauter VXN.. - BXN	15 ÷ 50
	Sauter B4F..F	20 ÷ 32
	Sauter BT43B	15 ÷ 40
	Sauter V1T	15
	Sauter V4F	15 ÷ 32
	Sauter BUE.. - BUG.. - VUE.. - VUG	15 ÷ 50
upon request	Sauter B6F..F - B6S..F - BXD..F - BXE..F	65 ÷ 150
	Sauter V6F..F - V6S..F - VXD..F - VXE..F	65 ÷ 150
	Sauter BUE.. - BUG.. - VUE.. - VUG	65 ÷ 150
	Sauter V4F	40 ÷ 100
CLNV...R-0 ÷ CLNF U...R-0	Satchwell MJF - VSF	15 ÷ 25
	Satchwell VZ - MZ	15 ÷ 50
upon request	Satchwell VSF	32 ÷ 50
	Satchwell MZF - VZF (pin thread 3/8")	65 ÷ 150
	Satchwell MZF - VZF(pin thread 1/4")	65 ÷ 150
	Satchwell MJF (pin thread 1/4")	50
CLNV...R-0 ÷ CLNF U...R-0	Schneider electric V221	65 ÷ 150
	Schneider electric V241	15 ÷ 50
	Schneider electric V265	40 ÷ 65
	Schneider electric V294	15 ÷ 32
	Schneider electric V295	40 ÷ 65
	Schneider electric V211, V211T	15 ÷ 50
	Schneider electric V341	15 ÷ 50
	Schneider electric V395-1	40 ÷ 100

Adapter Kits are available for coupling
Valves / Actuators



VYQ 2 ...

2 WAY BALL ZONE VALVES (SBV) / INTERNAL THREAD / PN 16

Cold and hot water with max. 50% volume of glycol.

Fluid temperature 2...90°C. Brass body

Suitable actuators: CVQ 095 - 097. Versions with change over available

(1) *Kvs*: low coefficient: flow rate in m³/h with open valve and 100 kPa pressure drop.
100 kPa = 10 mWG = 1 bar
*V*_{max low-n}: *V*_{max} for low-noise operation

	DN body	Rp connections	Kvs ⁽¹⁾ m ³ /h	PN
VYQ 215 - 1,2	15	1/2	1.2	25
VYQ 215 - 4,8	15	1/2	4.8	25
VYQ 220 - 8	20	3/4	8	25



VZC 2 ...

PRESSURE INDEPENDENT CONTROL BALL VALVES (PIQCV) / FEMALE THREAD / DN 15 - 25

Cold and hot water. Brass body. Suitable actuators CVQ 095 - 097

	DN body	Rp connections	Vnom l/h	PN	Sv min.
VZC 215-P-B	15	1/2	210	25	100
VZC 215-P-D	15	1/2	420	25	100
VZC 215-PT-B	15	1/2	210	25	100
VZC 215-PT-D	15	1/2	420	25	100
VZC 220-P-F	20	3/4	980	25	100
VZC 220-PT-F	20	3/4	980	25	100
VZC 225-PT-G	25	1	2100	25	100

RELATED PRODUCTS

ZR 2315	DN 15 connectors
ZR 2320	DN 20 connectors
ZR 2325	DN 25 connectors




CVQ 0...

ROTARY ACTUATOR FOR ZONE VALVES AND PIQCV


Quick-mounting actuator For VZC 2.. valves.

	Power supply V (VA)	Control	Run time sec.	Torque (Nm)	Limit switch (accessory)
CVQ 095	24V AC/DC (0.6)	3-points	75	1	No
CVQ 095-0	24V AC/DC (0.6)	0-10V	75	1	No
CVQ 097	230V AC (2)	3-points	75	1	No

Ball valves

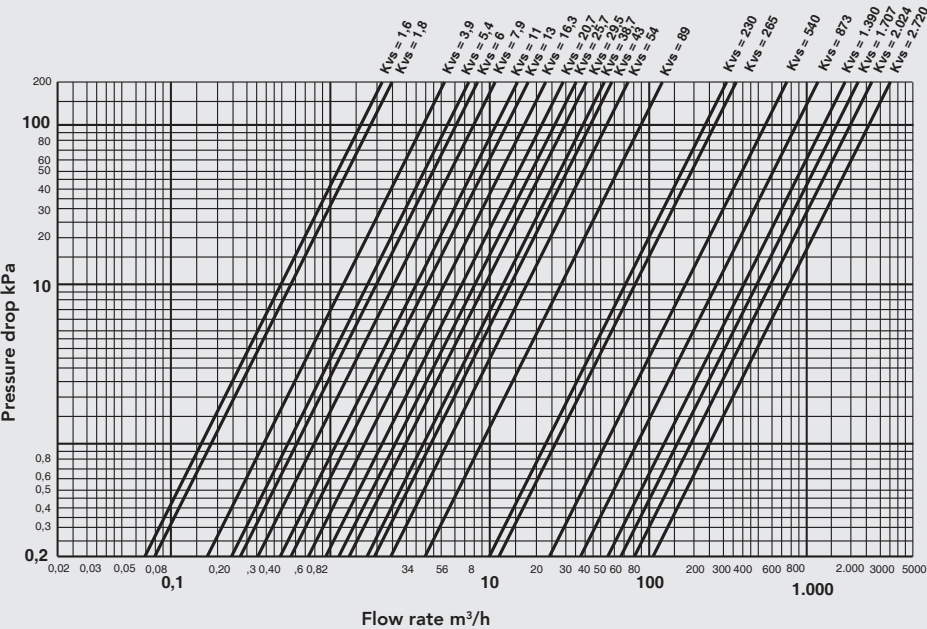


Seat Valves

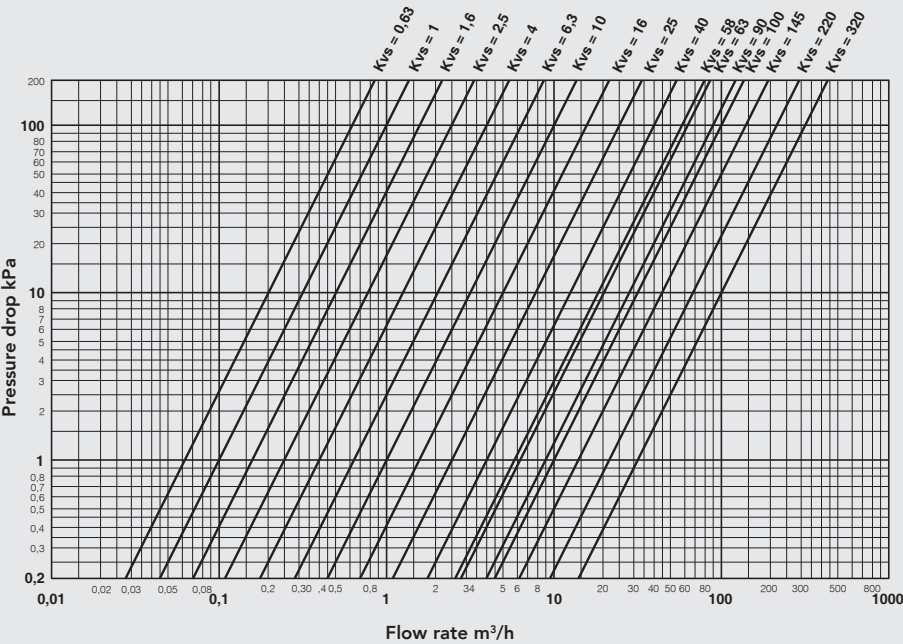





3 - 4 Way slipper and butterfly valves

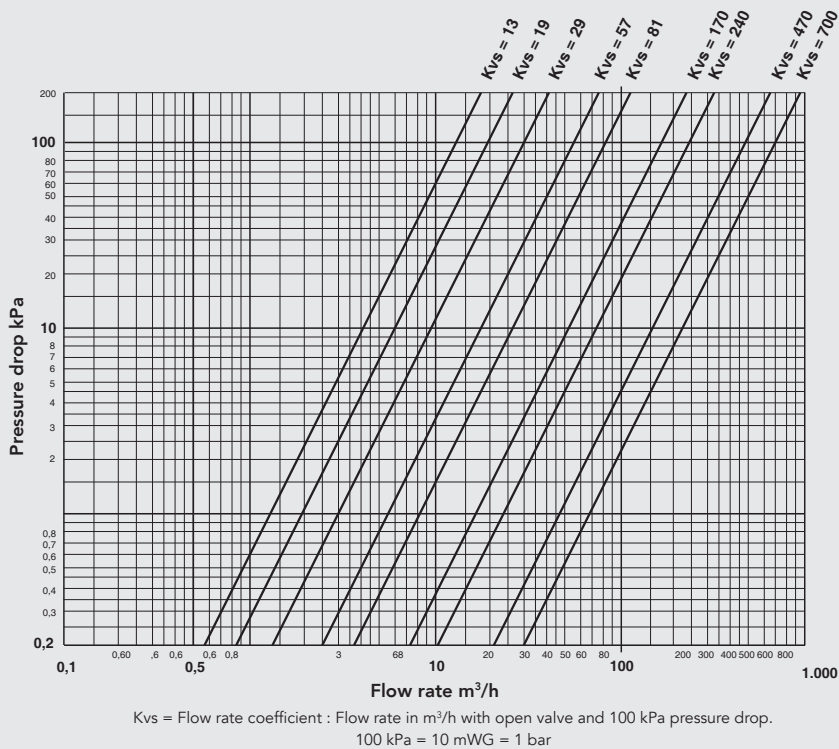

2 Way butterfly valves

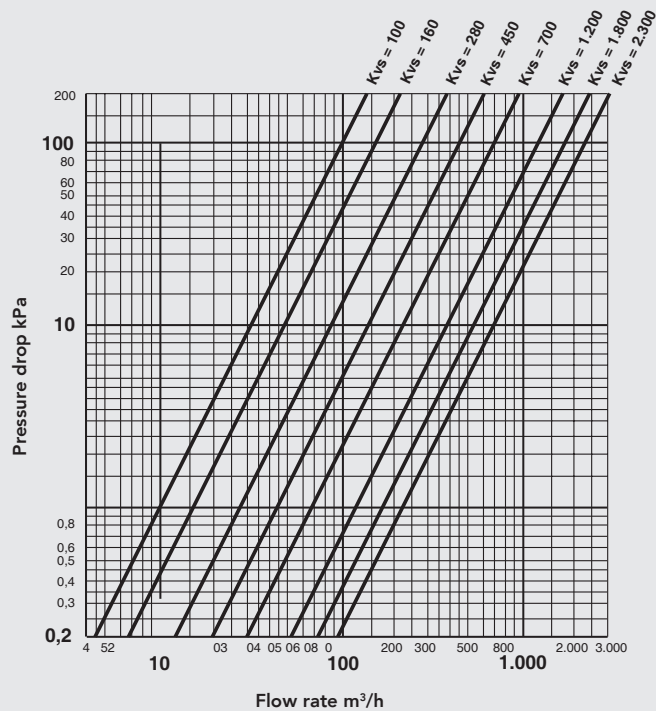

2-way sealing butterfly valves

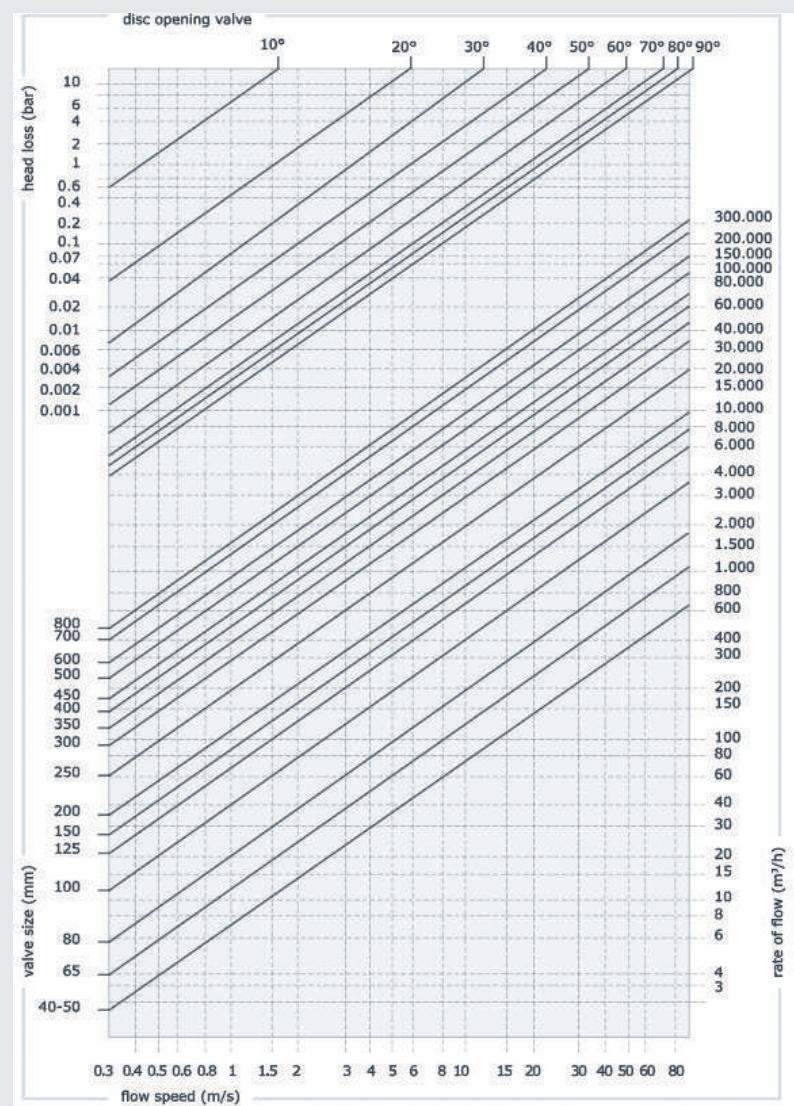

KV values (CV = 1,16 KV)

Angle	40/50	65	80	100	125	150	200
5°	–	–	–	–	–	–	–
10°	–	–	–	–	–	–	–
15°	0.2	0.6	1.8	2.4	4.2	5.6	14
20°	0.9	2.5	5.2	9.5	15	23	110
25°	3	6.1	12	22	38	61	125
30°	6.1	11	21	39	69	112	211
35°	9.9	18	33	60	105	166	303
40°	15	27	49	88	148	228	405
45°	21	38	68	121	199	303	528
50°	29	51	91	159	262	394	679
55°	39	68	119	207	338	505	863
65°	72	121	209	357	565	820	1364
70°	92	161	283	487	768	1097	1788
75°	109	209	381	662	1059	1507	2425
80°	115	253	502	906	1457	2008	3642
85°	115	253	502	906	1457	2008	3642
90°	116	257	508	925	1492	2168	3838



CSL ..., CSN ..., CSS ..., CSG ...

DAMPER ACTUATORS

Actuators suitable for operating dampers in air handling units.



	Power supply V (VA)	Control	Auxiliary controls	Dampers m ²	Torque N/m	Run sec.
CSL 138	230V AC (4)	2 or 3-points	No	1	5	150
CSL 138/C	230V AC (4)	2 or 3-points	1	1	5	150
CSL 134	24V AC/DC (2)	2 or 3-points	No	1	5	150
CSL 134/C	24V AC/DC (2)	2 or 3-points	1	1	5	150
CSL 104	24V AC/DC (2)	2 - 10V-	No	1	5	150
CSN 238	230V AC (6)	2 or 3-points	No	2	10	150
CSN 238/C	230V AC (6)	2 or 3-points	1	2	10	150
CSN 234	24V AC/DC (4)	2 or 3-points	No	2	10	150
CSN 234/C	24V AC/DC (4)	2 or 3-points	1	2	10	150
CSN 204	24V AC/DC (4)	2 - 10V-	No	2	10	150
CSS 438	230V AC (6)	2 or 3-points	No	4	20	150
CSS 438/C	230V AC (6)	2 or 3-points	1	4	20	150
CSS 434	24V AC/DC (4)	2 or 3-points	No	4	20	150
CSS 434/C	24V AC/DC (4)	2 or 3-points	1	4	20	150
CSS 404	24V AC/DC (4)	2 - 10V-	No	4	20	150
CSG 838	230V AC (8)	2 or 3-points	No	8	40	150
CSG 838/C	230V AC (8)	2 or 3-points	1	8	40	150
CSG 834	24V AC/DC (7)	2 or 3-points	No	8	40	150
CSG 834/C	24V AC/DC (7)	2 or 3-points	1	8	40	150
CSG 804	24V AC/DC (7)	2 - 10V-	No	8	40	150



CFT ..., CFL ..., CFS ...

DAMPER ACTUATORS WITH EMERGENCY CLOSURE

Actuators suitable for operating dampers in air handling units. Automatic closure of the damper in the event of power failure.

	Power supply V (VA)	Control	Auxiliary controls	Dampers m ²	Torque N/m	Run sec.	Emergency sec.
CFT 028	230V AC (5)	2-points	No	0,4	2	75	25
CFT 028/C	230V AC (5)	2-points	1	0,4	2	75	25
CFT 024	24V AC/DC (5)	2-points	No	0,4	2	75	25
CFT 024/C	24V AC/DC (5)	2-points	1	0,4	2	75	25
CFT 004	24V AC/DC (5)	2 - 10V DC	No	0,4	2	75	25
CFL 128	230V ~ (7)	2 points	No	0,8	4	75	20
CFL 128/C	230V ~ (7)	2-points	1	0,8	4	75	20
CFL 124	24V AC/DC (7)	2-points	No	0,8	4	75	20
CFL 124/C	24V AC/DC (7)	2-points	1	0,8	4	75	20
CFL 134	24V AC/DC (5)	3-points	No	0,8	4	150	20
CFL 104	24V AC/DC (5)	2 - 10V DC	No	0,8	4	150	20
CFS 428	230V AC (18)	2-points	No	4	20	75	20
CFS 428/C	230V AC (18)	2-points	2	4	20	75	20
CFS 424	24V AC/DC (7.5)	2-points	No	4	20	75	20
CFS 424/C	24V AC/DC (7.5)	2-points	2	4	20	75	20
CFS 404	24V AC/DC (7)	2 - 10V DC	No	4	20	150	20
CFS 404/C	24V AC/DC (7)	2 - 10V DC	2	4	20	150	20



FCS ...

LIMIT SWITCH CONTACT FOR DAMPER ACTUATORS

FCF 223	Auxiliary limit switch contact with 2 changeover contacts 3 (0,5)A, 250V AC for CFS... actuators
FCS 123	Auxiliary limit switch contact with 1 changeover contact 3 (0,5)A, 250V AC for CS... actuators
FCS 223	Auxiliary limit switch contact with 2 changeover contacts 3 (0,5)A, 250V AC for CS... actuators
PCS 104	Positioner 0...100% actuator dampers 0 - 10V DC (max 10 actuators)

KH ..., AH ..., KG ..., ZG ...

ACCESSORIES REQUIRED TO COUPLE ACTUATORS TO THE DAMPERS

AH-20	Lever for CSS... actuators
AH-25	Lever for CSN... actuators
AH-TF	Lever for CFT... actuators
AH-GMA	Lever for CSG... actuators
KH 8	Universal lever for damper pins (Ø10 ... 18 mm.; $\varnothing$ 10 ... 14 mm.)
KG 10	Ball joint connection (use rods with Ø max. 10 mm.)
KH-AFB	Lever for CFS.. actuators
KH-LF	Lever for CFL... actuators
ZG-GMA	Kit for mounting actuator on the flat for CSG... actuators
ZG-NMA	Kit for mounting actuator on the flat for CSN... actuators
ZG-SMA	Kit for mounting actuator on the flat for CSS... actuators
ZG-AFB	Kit for mounting actuator on the flat for CFS... actuators
ZG-LF1	Kit for mounting actuator on the flat for CFL... actuators
ZG-TF1	Kit for mounting actuator on the flat for CFT...

ACCESSORIES REQUIRED TO COUPLE ACTUATORS TO THE DAMPERS



- 1 actuator for 1 damper:
 - direct mounting on the damper pin, no accessory is required;
 - remote mounting No. 1 AH..., No. 1 KH8, No. 2 KG 10 and No. 1 rod⁽¹⁾.
- 1 actuator for 2 dampers:
 - direct mounting on pin of damper No. 1 AH..., No. 1 KH8, No. 2 KG 10 and No. 1 rod⁽¹⁾;
 - remote mounting No. 1 AH..., No. 2 KH8, No. 3 KG 10 and No. 2 rods⁽¹⁾.
- 1 actuators for 3 dampers:
 - direct mounting on pin of damper No. 1 AH..., No. 2 KH8, No. 3 KG 10 and No. 2 rods⁽¹⁾;
 - remote mounting No. 1 AH..., No. 3 KH8, No. 4 KG 10 and No. 3 rods⁽¹⁾.

⁽¹⁾ Universal joint connecting rods: 8/10 mm round rod (available from any hardware store)

NOTES



SENSORS, REMOTE CONTROLS AND ACCESSORIES

COMMUNICATION PROTOCOLS



Wireless system with room and outside temperature sensors



THP 868

WIRELESS TEMPERATURE/HUMIDITY SENSOR

Temperature and relative humidity sensors in 80 x 80 x 25 mm container. It can be integrated with CSW 868 wireless concentrator.

THP 868	Wireless temperature/humidity sensor with data logger
----------------	---



COP 868

WIRELESS TEMPERATURE HUMIDITY/CO₂ SENSOR

Combined sensor in 80 x 120 x 25 mm container.. It can be integrated with CSW 868 wireless concentrator.

Available from JUNE 2023

COP 868	Wireless Temperature/ humidity/ CO ₂ sensor
----------------	--



STT-STU..H

WIRELESS WATERTIGHT RADIO SENSOR

Watertight temperature sensors in 105 x 105 x 55 mm container. They can be integrated with CSW 868 wireless concentrator.

STT 868H	Watertight temperature sensors in 105 x 105 x 55 mm container
-----------------	---

STU 868H	Wireless watertight temperature-humidity sensor
-----------------	---

COMMUNICATION
PROTOCOL

CSW 868

WIRELESS SENSOR CONCENTRATOR

System module enabling wireless connection with one or more wireless devices (up to 40):

- THP 868,
- PCP 868
- COP 868
- STT 868H
- STU 868H
- ATR 868

It provides two-way communication with wireless field devices. Can be combined with Y... and Z... series controllers, or with EHC 602 or YHC 700. 12V DC power supply.

1 module DIN enclosure.

ANTENNA INCLUDED.

CSW 868	Wireless sensor concentrator
----------------	------------------------------

RELATED PRODUCTS

APA 500	SMA antenna extension, length 5 meters
----------------	--

ANT 868	Upgraded antenna for 868 concentrators
----------------	--



SWB 912

T/H WIRELESS SENSOR READING KIT

The SWB 912 KIT enables the acquisition of THP 868 radio sensors via the X-series equipment... without changing the hardware in the field.

The acquired variables are temperature.

It consists of CPX 912, CSW 868 S1, ALM 1210 power supply and ANT 250 antenna.

SWB 912	Wireless sensor reading kit
----------------	-----------------------------

COMMUNICATION
PROTOCOLS

SAC 002

ROOM TEMPERATURE, CO₂ AND RELATIVE HUMIDITY SENSOR

Room sensor for wall installation for CO₂ temperature and humidity detection in MODBUS and M-bus protocol.

Temperature detection and transmission on NTC resistive output 10kΩ. Measurement detection on 0-10V outputs.

Power supply 24V AC.⁽¹⁾

SAC 002	Room temperature, CO ₂ and relative humidity sensor
----------------	--

⁽¹⁾ When used in M-Bus takes power from the Bus



SAB 002

PT 1000 ROOM SENSOR

SAB 002 PT 1000 room sensor



STA 0..

AIR DUCT TEMPERATURE SENSOR

The 1W version can acquire and transmit temperature values. .

STA 001W Air duct temperature sensor 1W (–30... 100 °C)
Only for YLC control units.

STA 002 PT 1000 air duct temperature sensor. (–20...100 °C)
Only for YLC control units.

STA 010 Air duct temperature sensor (0...100 °C),
NTC 10 KΩ

STA 001 Air duct temperature intake sensor (–30...+40 °C) NTC 1 KΩ



SAF 00..

CABLE TYPE TEMPERATURE SENSOR

Installation in watertight pocket.

SAF 001 Cable type temperature sensor

SAF 001W Cable type temperature sensor 1W (0...100 °C).
Only for YLC controllers.

SAF 002 Cable type temperature sensor PT 1000 (0...100 °C).
Only for YLC controllers.

SAF 010 Cable type temperature sensor (0...100 °C). NTC 10 KΩ.

SAF 110 Cable type temperature sensor with 2 sensors and 4 wires (0...100 °C)
(0...100 °C). NTC 10 KΩ.

RELATED PRODUCTS

GIS 090 Brass seal 1/2" x 90 mm complete with grommet; PN10

GIS 090/Inox Stainless steel seal 1/2" x 90 mm complete with grommet; PN16

GIS 160 Brass seal 1/2" x 160 mm complete with grommet; PN10

GIS 160/Inox Stainless steel seal 1/2" x 160 mm complete with grommet; PN16

GIS 500 Brass seal 1/2" x 500 mm complete with grommet; PN10

GIS 500/Inox Stainless steel seal 1/2" x 500 mm complete with grommet; PN16

ACM 103 Connection box with terminal block and adapter for old COSTER
seals.



SAE 00.

OUTSIDE TEMPERATURE SENSOR

Measures outside temperature

SAE 001	Outside temperature sensor (-40 ... +40 °C), NTC 1 K Ω
SAE 002	Outside temperature sensor PT 1000 only for YLC controllers



SAE 420

DIGITAL OUTSIDE SENSOR CURRENT MODULATION

Only for YLC controllers (can be connected to YLC and ZBC analogue input)

SAE 420	Digital current-modulating outside sensor
----------------	---



SIH 00..

IMMERSION SENSOR

Contact fluid carrier installation.

SIH 001W	Immersion sensor 1W (0...100 °C). Only for YLC controllers.
SIH 002	Immersion sensor PT 1000 (0...100 °C). Only for YLC controllers.
SIH 010	Immersion sensor with brass pocket (0...100 °C)
SIH 010/Inox	Immersion sensor with stainless steel pocket (0...100 °C)

PRODUCT RELATED TO SIH 010

APV 100	Accessory for adapting to old COSTER seals
----------------	--



SCH 00..

SURFACE TEMPERATURE SENSOR

For installation in contact with pipework.

SCH 001W	Surface temperature sensor 1W (0...100 °C).
SCH 002	Surface temperature sensor PT 1000 (0...100 °C). for YLC controllers YLC
SCH 010	Surface temperature sensor (0...100 °C). NTC 10K Ω



SAA ...

WATERTIGHT ROOM TEMPERATURE SENSOR

Measurement of room temperature in very humid rooms (e.g. greenhouses).
Measurement of very high and humid room temperatures (80...90 °C).

SAA 001 Watertight room sensor (– 30...+40 °C), NTC 1 KΩ

SAA 010 Watertight room sensor (0...+100 °C), NTC 10 KΩ



SAB 0../SF - SAI 0../SF

ROOM TEMPERATURE SENSORS

WITH OR WITHOUT SET POINT ADJUSTER

These are NTC 10 KΩ type sensors for measuring room temperature (measuring range 0...40 °C).

Some sensors are equipped with a local set point adjuster to change the desired room temperature.



SAB 002/SF Flush-mounted room sensor without specific plug PT 1000

SAB 010 In wall container 80 x 80 x 32 NTC 10 kΩ

SAB 010/SF Flush-mounted room sensor without specific plug NTC 10 kΩ

SAB 020 Double sensor in wall container 80 x 80 x 32 NTC 20 kΩ

SAI 010 Radiation sensor, in wall container 80 x 80 x 26 NTC 10 kΩ

The exact compatibility of the sensors with the devices is indicated in the device manuals, which can be found at www.costergroup.eu



SGG - SGE ...

OUTSIDE TEMPERATURE SENSOR FOR "DAY DEGREE" MEASUREMENT

Specific outside temperature sensors for day degrees measurement.

The sensor is provided with mechanics unaffected by radiated heat, as established by the standards of the day degrees measurement

SGG 001 High-precision outside temperature sensor specifically for the XGG 618 standardised degree-day meter

SGE 001 Outside temperature sensor compatible with all climate controllers, for measuring day degrees included in these controllers



STH 001

IMMERSION TEMPERATURE SENSOR (0...300 °C)

Sensors type PT 1000

STH 001 Immersion temperature sensor (0...300 °C)



SIR 010

DIRECT IMMERSION TEMPERATURE SENSORS (0...100 °C)

The sensor is in direct contact with water to increase the response speed.
Indispensable, for example, for controlling instantaneous domestic hot water mixing.
Sensor type NTC 10 K Ω

SIR 010 Direct immersion temperature sensor (0...100 °C)



STT 010

TEMPERATURE SENSOR FOR TERMINAL UNITS (0...40 °C)

Sensor type NTC 10 K Ω

STT 010 Air intake temperature sensor for terminal units



STF 001

FLUE GAS TEMPERATURE SENSOR (0...500 °C)

Sensor type PT 1000

STF 001 Flue gas temperature sensor (0...500 °C)



SHF 001

CABLE TYPE TEMPERATURE SENSORS (0...180 °C)
POCKETS AND ACCESSORIES

SHF 001 Cable type temperature sensors (0...180 °C), NTC 1 KΩ

RELATED PRODUCTS

GIS 090	Brass pocket 1/2" x 90 mm complete with grommet; PN16
GIS 090/Inox	Brass pocket 1/2" x 160 mm complete with grommet; PN10
GIS 160	Stainless steel sheath 1/2" x 160 mm complete with grommet; PN16
GIS 160/Inox	Brass pocket 1/2" x 500 mm complete with grommet; PN10
GIS 500	Inox pocket 1/2" x 500 mm complete with grommet; PN16
GIS 500/Inox	Inox pocket 1/2" x 500 mm. complete with grommet; PN16
ACM 103	Connection box with terminal block and adapter for old COSTER sheaths



SUR 704

RELATIVE HUMIDITY SENSOR FOR AIR DUCT

24 Volt AC power supply, or 12 V – from COSTER, devices, if equipped with 12 Volt – auxiliary power supply.
Output signal active: 0...5 V– or 0...10 V–.

SUR 704 Relative humidity sensors for air air ducts



SUT 734

HUMIDITY AND TEMPERATURE SENSOR FOR AIR DUCT

Power supply: 15..24 V = ($\pm 10\%$) or 24 V ~ ($\pm 10\%$) SELV.

Output voltage: 2 x 0...10 V or 0...5 V, configurable via jumper, min. load 10 k Ω NTC
passive output 10k.

SUT 734 Humidity and temperature sensors for air ducts



SAU 914

ROOM RELATIVE HUMIDITY AND TEMPERATURE SENSOR (0...50 °C)

24 Volt AC power supply, or 12 V - from COSTER devices, if equipped with 12 Volt
auxiliary power supply.

Humidity output signal: active 0...5 V- or 0...10 V-.

SAU 914 Room relative humidity and temperature sensor (0...50 °C)



SAU 734

ROOM RELATIVE HUMIDITY AND TEMPERATURE SENSOR

Power supply 15..24 V = ($\pm 10\%$) o 24 V ~ ($\pm 10\%$) SELV,

output voltage: 2 x 0..10 V (carico min. 10 k Ω) + spassive sensor

Humidity accuracy $\pm 2\%$ between 10..90% relative humidity (type at 21 °C)

SAU 734 Room relative humidity and temperature sensor



SPW 2..

ABSOLUTE PRESSURE SENSOR FOR LIQUIDS

Power supply 24 Volt AC/DC.

Output signal: 0 - 10 V-

SPW 204 Absolute pressure sensor for liquids (0...4 bar)

SPW 210 Absolute pressure sensor for liquids (0...10 bar)

SPW 216 Absolute pressure sensor for liquids (0...16 bar)



SDW 2..

DIFFERENTIAL PRESSURE SENSOR FOR LIQUIDS

Power supply 24 Volt AC/DC.

Output signal 0 - 10 V-

SDW 201 Differential pressure sensor for liquids (0...1 bar)

SDW 202 Differential pressure sensor for liquids (0...2,5 bar)

SDW 206 Differential pressure sensor for liquids (0...6 bar)



SDA 700

DIFFERENTIAL PRESSURE TRANSDUCER (0...26 MBAR SETTABLE)

Differential pressure transducer with 8 selectable measurement ranges and adjustable output signal (0...10 V or 4...20mA) or Modbus.

Power supply: 15...24 V = ($\pm 10\%$); 24 Volt AC ($\pm 10\%$)

SDA 700 Differential pressure transducer for air (0...26 mbar settable)



LGP ...

LIQUID LEVEL PRESSURE SENSORS

Water, diesel or other liquids tank level measurement by detecting the hydrostatic pressure of the liquid.

12 Volt power supply - from COSTER devices (UML 318).

Output signal active: 0 - 5 V-

LGP 250 Liquid level pressure sensor (water 0...2.5 m)

LGP 500 Liquid level pressure sensor (water 0...5 m)

RELATED PRODUCT

UML 318 Unit of measurement, alarm and storage for various signals



SAL 500

ANTI-FLOODING SENSOR

UAL 358

CONTROL AND ALARM UNIT

FOR UP TO 3 ANTI-FLOODING SENSORS

Alarm system to detect flooding caused by plumbing leaks.

SAL 500 Anti-flooding sensor

UAL 358 Control unit for up to 3 anti-flooding sensors



SQC 954

ROOM AIR QUALITY SENSOR

Room air quality sensor.

SQC 954 Room air quality sensor



SQS 954

AIR QUALITY SENSOR FOR AIR DUCT

Air quality sensor for air duct.

SQS 954 Air quality sensor for air duct





UPA 798

ELECTROMECHANICAL ROOM HUMIDOSTAT

On-Off switching of humidification or dehumidification units.
Wall mounting.

UPA 798 Room humidostat



UPC 799

AIR DUCT ELECTROMECHANICAL HUMIDOSTAT

On-Off switching of humidification or dehumidification units.
Mounted in air duct.

UPC 799 Room humidostat



TAG 797

ELECTROMECHANICAL FROST PROTECTION THERMOSTAT

Suitable for frost protection of water battery heater units.

TAG 797 Electromechanical frost protection thermostat



PDF 795

DIFFERENTIAL PRESSURE SWITCH

Signals of the cleanliness status of the filter unit or fan operation.

- Setting range: 50 ... 500 Pa
- Triggering differential: 20 Pa +/- 15% (100 kPa = 1 bar)
- Maximum pressure: 5 kPa

PDF 795 Differential pressure switch



CDB ...


REMOTE CONTROLS FOR VARIOUS CONTROLLERS

They are desired room temperature set point adjusters or other equipment, with or without sensors.


	Description	Compatible Controllers
CDB 100	Temperature set point adjuster with room sensor (0...40 °C)	DRU 414/418, DTF/RTF 31, DTT 318; XTU 614/618, XTU 644, XTU 664, XTA 624, XTR 628
CDB 200	Humidity Temperature set point adjuster with room sensor (0...40 °C)	XTU 614, XTU 644, XTU 664
CDB 300	Programs change for climate controllers	XTP 600, XTT 608, XTE 611, XTE 600/602, XSE 600/602
CDB 300/S1	Programs change for climate controllers with room sensor (0...40 °C)	XTP 600, XTT 608, XTE 611, XTE 600/602, XSE 600/602
CDB 301	Programs change for climate controllers on DIN 3 box unit	XTP 600, XTT 608, XTE 611, XTE 600/602, XSE 600/602
CDB 333	Programs change	XCS 633, XSS 633, XTU 618

Ni 100 Ω sensor resistance


[Discontinued]

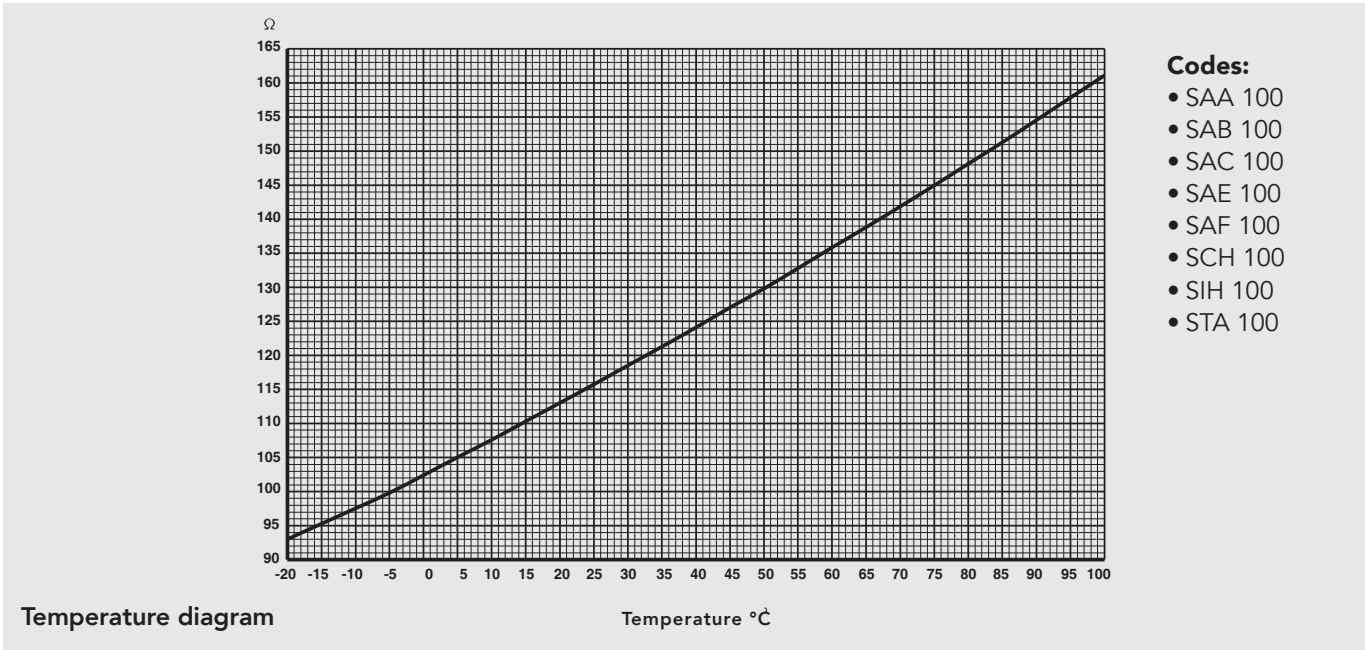

NTC 1 KΩ sensor resistance

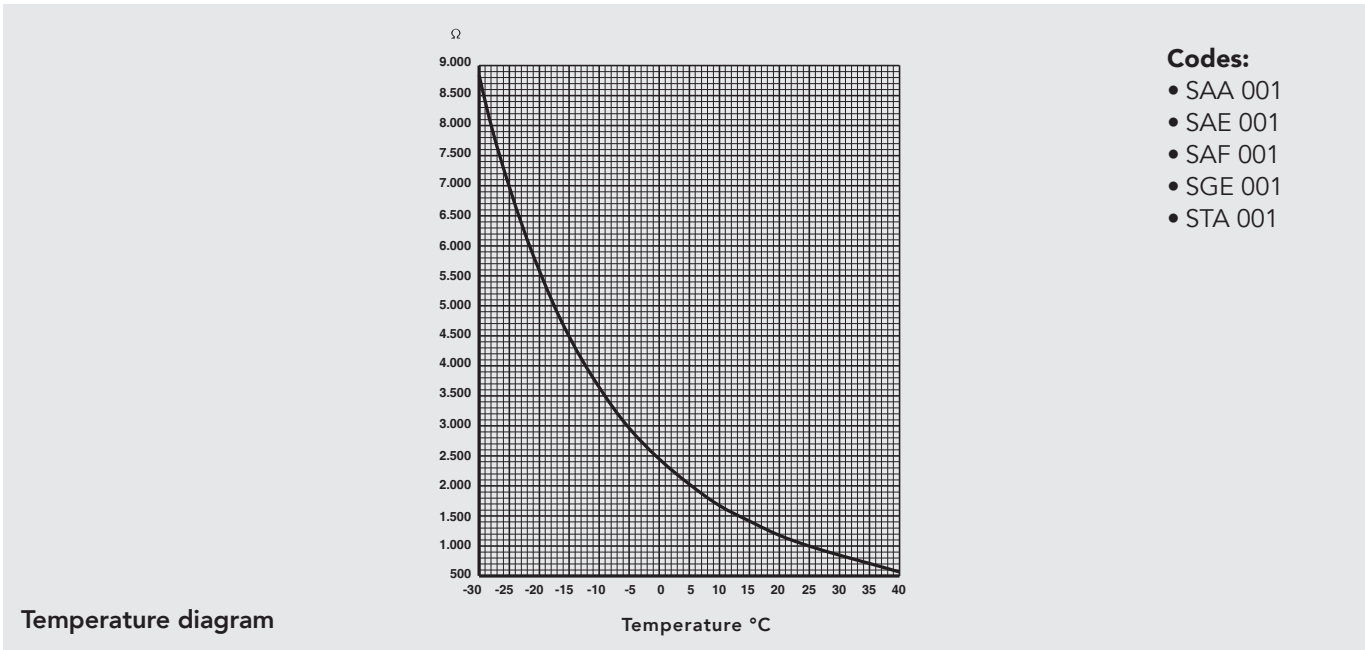


Pt1 kΩ sensor resistance

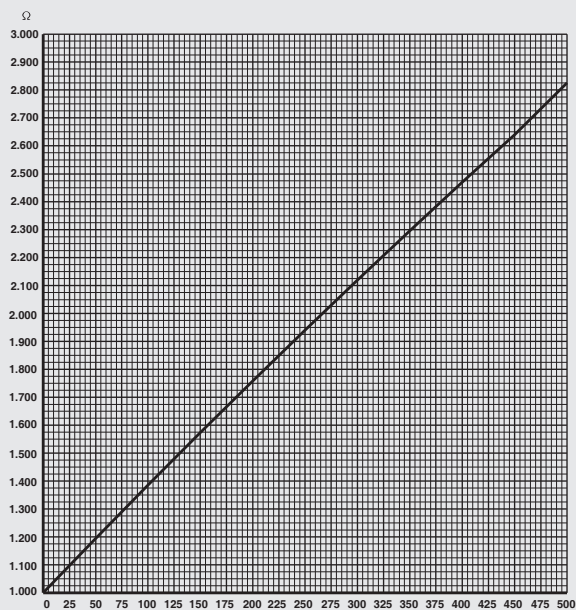

Temperature diagram

- Codes:**
- SGG 001
 - SHF 001
 - STF 001
 - STH 001
 - STA 002
 - SAB 002
 - SAE 002
 - SIH 002
 - SAF 002
 - SCH 002

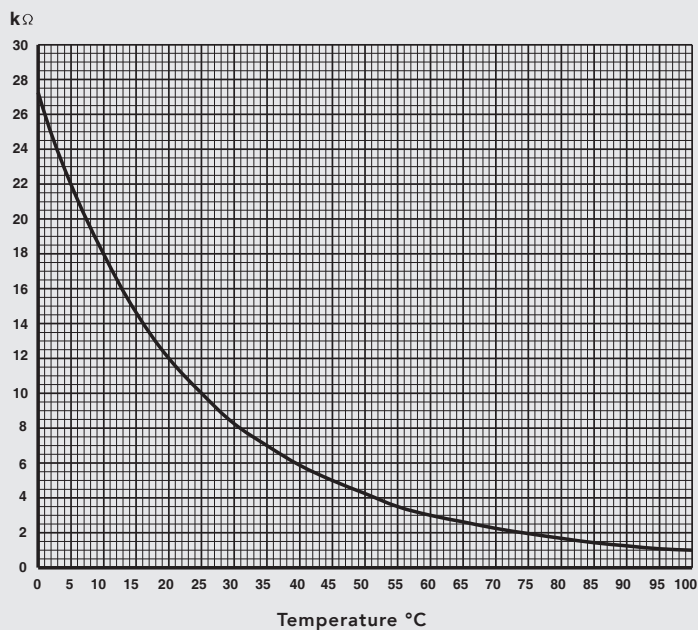

Temperature diagram

- Codes:**
- SAA 010
 - SAB 010
 - SAB 011
 - SAB 210
 - SAF 010
 - SAF 110
 - SCB 110
 - SCB 210
 - SCH 010
 - SIH 010
 - SIR 010
 - STA 010
 - STT 010
 - STV 010



CONNECTIVITY SUPERVISION AND ACCESSORY

COMMUNICATION PROTOCOLS



RS 232





CW...

WEB GARAGE LICENCES

Licence for BMS based on a number of points.

The purchase is a "one-off" and does not require periodic subscriptions. Provides maximum flexibility in the management of integrated points in terms of protocol and configuration of their properties (historicisation, visualisation, alarms, etc.)

CWS 100	100 controlled points licence (of which up to 20 points historicised)
CWS 200	200 controlled points licence (of which up to 40 points historicised)
CWS 500	500 controlled points licence (of which up to 100 points historicised)
CWS 01K	1000 controlled points licence (of which up to 200 points historicised)
CWS 02K	2000 controlled points licence (of which up to 400 points historicised)
CWS 05K	5000 controlled points licence (of which up to 1000 points historicised)
CWS 10K	10000 controlled points licence (of which up to 2000 points historicised)
CWS 50K	50000 controlled points licence (of which up to 10000 points historicised)
CWS 1HK	100000 controlled points licence (of which up to 20000 points historicised)
CWC 100	Add-On License for Server Version. Increase by 100 points the number of historicized points of the basic license (Server Version only)
CWC 01K	Add-On License for Server Version. Increase by 1000 points the number of historicized points of the basic license (Server Version only)



CW..._MAINT

RENEVAL WEB GARAGE LICENCES

Annual licence renewal for access to updates, weather application or connection via Edge2Cloud to the Coster Connect service

CWS 100_MAINT	Maintenance licence 100 controlled points
CWS 200_MAINT	Maintenance licence 200 controlled points
CWS 500_MAINT	Maintenance licence 500 controlled points
CWS 01K_MAINT	Maintenance licence 1000 controlled points
CWS 02K_MAINT	Maintenance licence 2000 controlled points
CWS 05K_MAINT	Maintenance licence 5000 controlled points
CWS 10K_MAINT	Maintenance licence 10000 controlled points
CWS 50K_MAINT	Maintenance licence 50000 controlled points
CWS 1HK_MAINT	Maintenance licence 100000 controlled points



PPC 102

PANEL PC TOUCH SCREEN

Panel PC with touch screen for front panel or wall installation

NB: For system solutions with a higher number of license points than those indicated, ask the sales office for a quotation

PPC 102 Panel PC with 10" touch screen for Web Garage licence up to 2000 points



EHC 602

MULTI-PROTOCOL EDGE DEVICE

Device used to install the Webgarage licence inside the switchboard.

For further details, see pages 12 and 68

EHC 602 Web Garage licence up to 2000 points excluded



SWC 701

FREE REMOTE CONTROL SOFTWARE DOWNLOADABLE FROM THE INTERNET

Application software for managing communications between central computer and peripheral units (central heating systems, plants). Downloadable from the website www.costergroup.eu after registration.

MANUAL AND INFORMATION ON THE WEBSITE: www.costergroup.eu, product menus, remote control documentation.

SWC 701	Remote control software via RS232 and C-Bus protocol.	download
----------------	---	----------



CosterTools

YLC SYSTEM REMOTE CONTROL SOFTWARE

Remote control of monitoring and control for devices of the Building Controls line YLC System:

- Via telephone line (landline, GSM)
- ETHERNET network

Downloadable from the website www.costergroup.eu after registration

CosterTools	Remote control program for Multi-Climate system.	download
--------------------	--	----------

COMMUNICATION
PROTOCOLS

RUT 302

4G ROUTER

4G router with RS 485 and C-BUS serial communication ports and Ethernet port. Configurable via integrated webserver. Power supply 12..24V AC/DC. In 3 DIN module housing.

RUT 302 Router 4G

RELATED PRODUCTS

ETH 338 Ethernet cross-over cable for RUT 302 and ARE 338 direct connection

APA 500 SMA antenna extension, length 5 meters

ANT 500D Directional Antenna



C-BUS

COMMUNICATION
PROTOCOL

ARE 338


ETHERNET / C-BUS CONVERTER

Connection of devices equipped with C-Bus to the Ethernet. Only for X-series controllers.

ARE 338 Ethernet / C-Bus Converter

C-BUS

Mixed Modbus and C-Bus system architecture

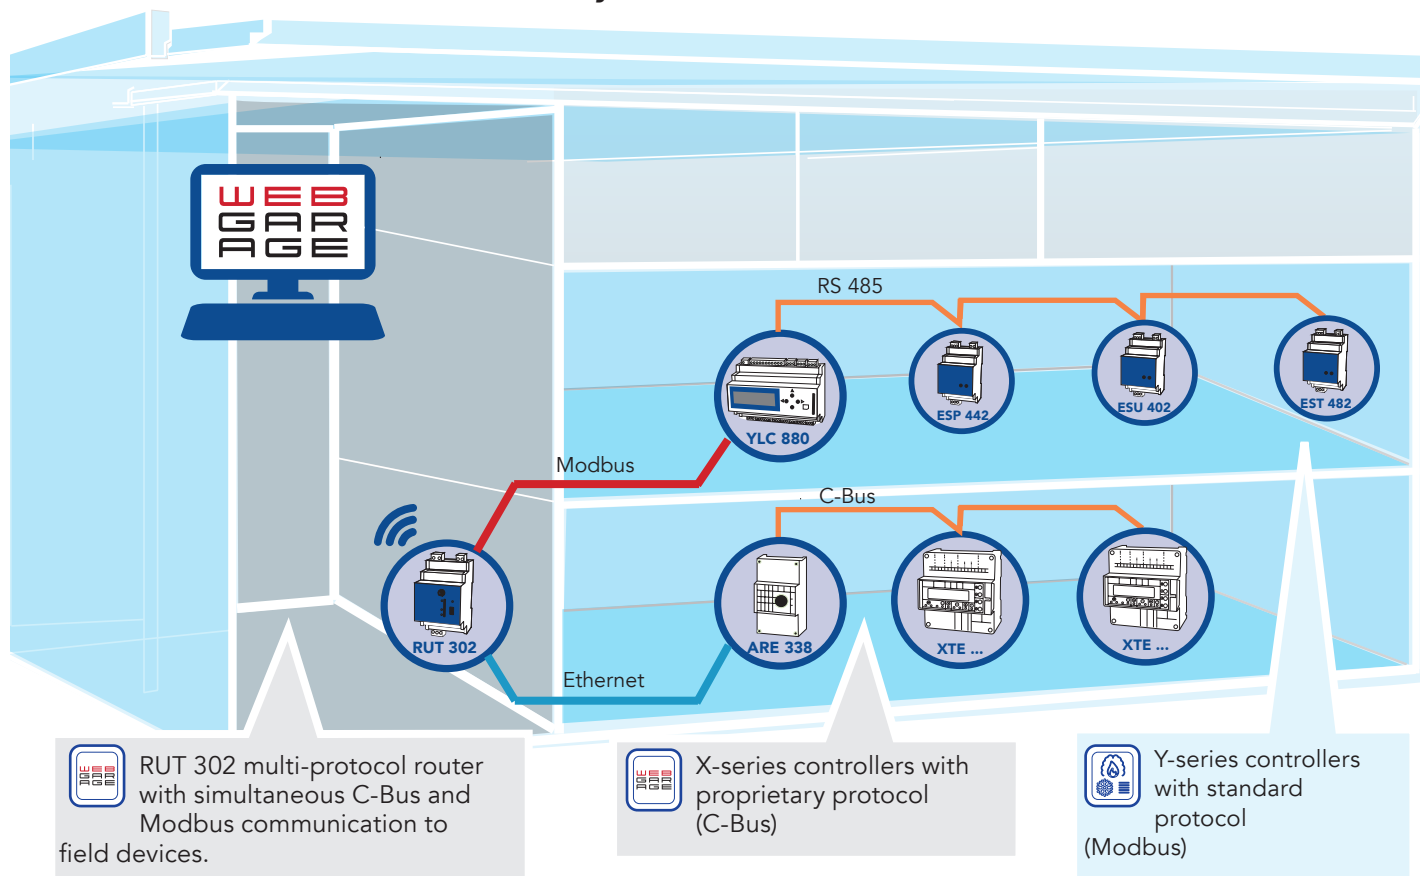



MDM 002

DESKTOP MODEM

Desktop modem for Clima Office and SWC 701.

Powered through USB port

MDM 002 Desktop modem

RELATED PRODUCTS

APA 500 SMA antenna extension, length 5 meters

ANT 500D Directional Antenna



COMMUNICATION
PROTOCOL

RS 232

MDM 232

GSM MODEM

The MDM 232 modem ensures two-way communication between the control units YLC 880, YHC 700 and the supervisory system via an M2M SIM CARD with 2G connectivity.

Power supply 12V DC Antenna included

In 1 module DIN enclosure.

MDM 232 Modem GSM / 2G

RELATED PRODUCTS

APA 500 SMA antenna extension, length 5 meters

ANT 500D Directional Antenna



COMMUNICATION
PROTOCOLS

C-BUS

KIT 668

KIT AS AN ALTERNATIVE TO GSM 668

GSM/GPRS modem complete with 12 V power supply unit and C-Bus/ModBus converter.

KIT 668 GSM/GPRS modem

RELATED PRODUCTS

APA 500 SMA antenna extension, length 5 meters

ANT 500D Directional Antenna

NB: Replaces GSM 668

COMMUNICATION
PROTOCOLS

RS 232

GTW 232485

RS 232 - RS 485 CONVERTER

Device enabling conversion between RS232 and 485 serial. It ensures bidirectional communication between the units connected to it. It can only be used with YLC 740 and YLC 780 controllers.

12V DC power supply.

In 1 module DIN enclosure.

GTW 232485 RS 232 - RS 485 converter



RUT 002

4G ROUTER

With high-speed wireless and Ethernet connections.

Power supply unit included.

RUT 002 4G router with Ethernet port



SWH 005

5 PORTS ETHERNET SWITCH

SWH 005 5 Ports Ethernet Switch

COMMUNICATION
PROTOCOLS

RS 232

ACB 332

LOW-POWER C-BUS AMPLIFIER AND CONVERTER

It amplifies the C-Bus line, with speeds from 1200 to 9600 bps.

Converts C-Bus to RS 232 for connection with PC or modem with RS 232, but no C-Bus. Only for X-series controllers.

ACB 332 Low power C-bus amplifier and converter

COMMUNICATION
PROTOCOL

RS 232

PCB 332

MEDIUM POWER C-BUS AMPLIFIER AND CONVERTER

It amplifies the C-Bus line, with speeds from 1200 to 9600 bps.

Converts C-Bus to RS 232 for connection with PC or modem with RS 232, but no C-Bus. Extensive connection possibilities with devices, local or remote PC, and modem.

Only for X-series controllers.

PCB 332 High-power c-bus amplifier and converter



COMMUNICATION
PROTOCOLS

C←BUS RS 232

PCB 432

HIGH POWER C-BUS AMPLIFIER AND CONVERTER

It amplifies the C-Bus line, with speeds from 1200 to 9600 bps.
Converts C-Bus to RS 232 for connection with PC or modem with RS 232, but no C-Bus.
Extensive connection possibilities with devices, local or remote PC, and modem.
Only for X-series controllers.

PCB 432 High-power c-bus amplifier and converter

RELATED PRODUCT

ACX 232 Plug-in test for devices reprogramming



COMMUNICATION
PROTOCOLS

C←BUS RS 232

GVC 348

C-BUS SPEED CONVERTER BETWEEN 1200...9600 BPS AND VICE VERSA

It amplifies and realigns the C-Bus, with speeds from 1200 to 9600 bps.
It allows the connection of devices with different C-Bus speeds to the same line.
Only for X-series controllers.

GVC 348 C-bus speed converter between 1200...9600 bps and vice versa



COMMUNICATION
PROTOCOL

C←BUS

UCO 318

ON-OFF ONE CHANNEL TIME PROGRAMMER

Allows an On-Off contact to be programmed with any time schedules.
Only for X control units

UCO 318 ON-OFF one channel time programmer



COMMUNICATION
PROTOCOL

C←BUS

UCO 638

ON-OFF THREE CHANNEL TIME PROGRAMMER

Allows 3 On-Off 3-contacts to be programmed with any time schedules:
Only for X control units

UCO 638 ON-OFF three channel time programmer

COMMUNICATION
PROTOCOL

C-BUS

UAC 32.

UNIT FOR ACQUISITION AND LOGGIN ALARM, STATUS AND COUNTS, WITH 8 ON-OFF INPUTS

It can collect 8 On-Off signals of alarm, status, time counts and number of pulses.
Only for X control units

UAC 328 Unit for acquisition and loggin alarm, status and counts 230 V AC

UAC 324 Unit for acquisition and loggin alarm, status and counts 24 V AC

COMMUNICATION
PROTOCOL

C-BUS

ULT 3..

TEMPERATURE RECORDING UNIT

It allows 4 temperature measurements/alarms to be collected and recorded.
Programmable minimum and maximum alarms.

Sensor that can be connected

		NTC 10 kΩ 0...99 °C	NTC 10 kΩ 0...40 °C	NTC 1 kΩ -40...40 °C
ULT 328	Temperate recording unit.	2	1	1
ULT 348	Temperate recording unit	4	–	–
ULT 348/S1	Temperature recording unit for 4 room sensors used for air handling units	–	4	–

RELATED PRODUCTS

SAA 010	Watertight ambient temperature sensor (0...99 °C)
SAA 001	Watertight ambient temperature sensor (-40...40 °C)
SAE 001	Outside temperature sensor (-40...40 °C)
SCH 010	Surface temperature sensor (0...99 °C)
SIH 010	Immersion temperature sensor with brass thermowell (0...99 °C)
SIH 010 Inox	Immersion temperature sensor with stainless steel thermowell (0...99 °C)
SIR 010	Direct immersion quick sensor (0...99 °C)
SAF 010	Cable type temperature sensor (0...99 °C)
STA 010	Temperature sensor for air channels (0...99 °C)
STA 001	Temperature sensor for air channels (-40...40 °C)
SAB 010	Room temperature sensor (0...40 °C)
STT 010	Temperature sensor for terminal units (0...40 °C)



COMMUNICATION
PROTOCOL

C-BUS

UML 318

UNIT FOR MEASURING & RECORDING 0...5 VOLT
OR 0...10 VOLT OR 4...20 mA SIGNAL AND ALARMS

It transforms an analogue 0...5 Volt, or 0...10 Volt, or 4...20 mA signal into the measurement of a physical variable.

It includes: measurement, alarms and recording the value of the physical quantity.

Suitable for processing the signal of the:

- LGP ... pressure level sensor
- SDA ... differential pressure sensor for air
- other sensors with analogue output of any kind.

UML 318 Measuring and recording units for analogue signals

RELATED PRODUCTS

LGP 250 Pressure level sensor (0...0.25 bar)

LGP 500 Pressure level sensor (0...0.50 bar)

SDA 700 Differential pressure sensor for air

..... Any sensor with 0...5 Volt DC, 0...10 Volt DC, 4...20 mA output



COMMUNICATION
PROTOCOLS

C-BUS

RS 232

ACX 232

PLUG IN TEST FOR DIN DEVICES TYPE X ...

It allows a local PC to be connected to a COSTER device equipped with a "SLOT" (slot). It allows, where applicable, to update the devices software with the software tool.

ACX 232 Plug in test for TYPE X ... DIN devices



COMMUNICATION
PROTOCOL

C-BUS

ACB 4..

PLUG IN FOR COMMUNICATION
VIA C-BUS FOR X SERIES CONTROLLER

They allow remote control via C-Bus of "C-Bus ready" devices.

The documentation and front panel of each device indicate the required model of ACB 4... plug-in.

ACB 400 Plug-in for communication via C-Bus

ACB 460 Plug-in for communication via C-Bus

ACB 468 Plug-in for communication via C-Bus

COMMUNICATION
PROTOCOLS

RS 232

ACS 232

RS 232 CABLES WITH DB 9 MALE (FOR MODEM OR SIMILAR)

It is a 0.5 metre cable for connecting three RS 232 output terminals, to a PC or modem.

ACS 232 RS 232 cable with DB 9 male (for modem or similar)

COMMUNICATION
PROTOCOLS

C-BUS

RS 232

ACB 232

C-BUS TO RS 232 CONVERSION CABLE OF A PC NO MODEM

It is used to connect up to 5 COSTER devices equipped with C-Bus to the PC. Not to the modem, since the power supply is missing.

ACB 232 C-bus to RS 232 connection cable of a PC
NO MODEM

COMMUNICATION
PROTOCOLS

C-BUS

RS 232

ACB 232/S1

C-BUS TO RS 232 CONVERSION CABLE OF A PC OR MODEM POWERED BY COSTER DEVICES

It is used to connect up to 5 COSTER devices equipped with C-Bus to the PC, or to a modem, as it can be directly powered by a device with a 12 V auxiliary power supply -. (e.g.: UCO 318 and UCO 638).

ACB 232/S1 C-bus to RS 232 connection cable of a PC or modem
powered by Coster devices

COSTER

costergroup.eu

PESCHIERA BORRAMEO

Via Giuseppe di Vittorio, 24
20068 Peschiera Borromeo (MI)
tel: (+39) 022722121
info@costergroup.eu

EDOLO

Via Gen. Treboldi, 190/192
25048 Edolo (BS)
tel: (+39) 0364773211

